

SMA Male Crimp for RG174/188/316 TECHNICAL DATA SHEET

Features

- Frequency up to 6 GHz
- Quality body materials and plating
- Straight body geometry

Applications

- RF test systems
- RF Boxes and components



SA-1001GTG-SC1715

Electrical Specification


Frequency Range	DC ~ 6 GHz
Impedance	50Ω
VSWR	1.3 : 1 Max.

Storage & Operating Temperature : -25°C to +100°C

Mechanical Specification

PART	MATERIAL	PLATED
Housing	BRASS	GOLD
Center Conductor	BRASS	GOLD
Insulator	PTFE	NATURE

Outline Drawing (Unit:mm)

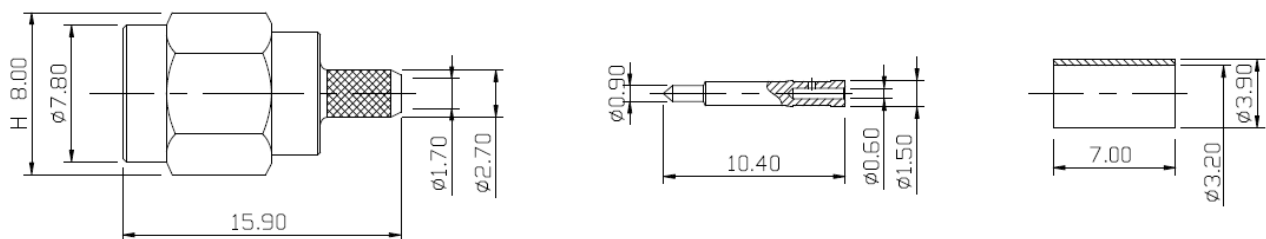

Recommended CABLE Stripping Dimension (Unit:mm)

