

JS LED[®] LED Commercial Down Light

Features :

- Replaces legacy CFL, HID or incandescent down lights.
- ETL & ES certified.
- AC Input:100-277V.
- 1-10V Dimmable.
- CCT and Power Adjustable
- High efficiency LM80 SMD LEDs, CRI90.
- Designed for 50,000 hours lifetime.




Application:

- ◆ Residential.
- ◆ Property management.
- ◆ Office, Multi-family.
- ◆ Hospitality, Healthcare etc..



Product Dimension:

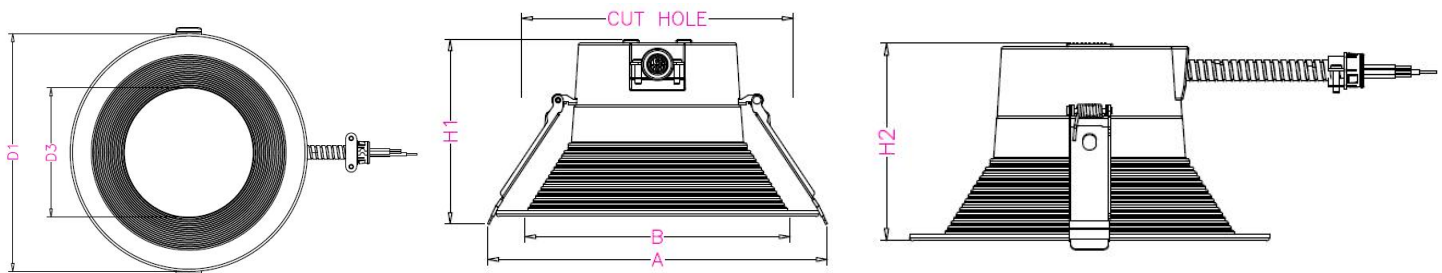

D1	D3	A	B	H1	H2	Cut HOLE
193mm	92mm	208mm	132mm	106mm	101mm	140mm

JS LED[®] LED Commercial Down Light

Specifications

LED Commercial Down Light

Model:	SZ-DL20W6-CD-ACP
Wattage:	Adjustable 12W/16W/20W
Size:	6 inch
CCT:	Adjustable:2700K/3000K/3500K/4000K/5000K
CRI:	90
Beam Angle:	105°
Lumens:	125LM/W
PF:	>0.9
Input:	100-277V 50/60Hz

Package

Size	Qty/Carton	Gross Weight
42.6*42.5*37.2cm	12	7.2Kg

Installation instructions


RETROFIT INSTALLATION

1. Shut off power at the source of the fixture housing into which you are installing fixture. Remove existing trim and CFL or Incandescent bulb.
Note: Follow all federal and local regulations when disposing of lamps and removed components.

2. Measure ceiling opening to ensure that the edge of the luminaire will cover the entire opening and still sit firmly in the ceiling.

3. Select desired Wattage and CCT using adjustment switches on fixture.




4. Attach carabiner safety clip to the existing fixture housing.



5. Insert lamp conduit into J-box and wire to power source (Black to Live, white to Neutral, Violet to 0-10V dimming positive, Gray to 0-10V dimming negative). Reattach J-box cover when done.

6. Squeeze the two housing clips so they are in an upright position and then insert lamp into housing.

7. Once lamp is inside housing, release housing clips and continue to push lamp into housing until securely fixed and flush with ceiling. Restore power.



JS LED[®] LED Commercial Down Light

INSTALLATION INSTRUCTIONS(continued)

RETROFIT INSTALLATION

1. Shut off power at the source of the fixture housing into which you are installing fixture.

2. Create ceiling opening to ensure that the edge of the luminaire will cover the entire opening and still sit firmly in the ceiling.

3. Select desired Wattage and CCT using adjustment switches on fixture.

4. Attach carabiner safety clip to secure location in ceiling.

5. Insert lamp conduit into J-box and wire to power source (Black to Live, white to Neutra, Violet to 0-10V dimming positive, Gray to 0-10V dimming negative). Reattach J-box cover when done.

6. Squeeze the two housing clips so they are in an upright position and then insert lamp into opening.

7. Once lamp is inside opening, release housing clips and continue to push lamp into opening until securely fixed and flush with ceiling. Restore power.

