



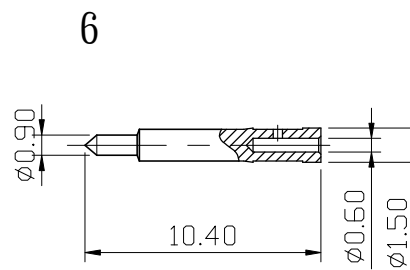


No.	DATE	DESCRIPTION	REV	REMARK : RoHS REQUIREMENT APPLIED (符合RoHS)	DATE	DRAWING NO.
					2008. 11. 21	SA-101GG-TEF(50)-174U/316U

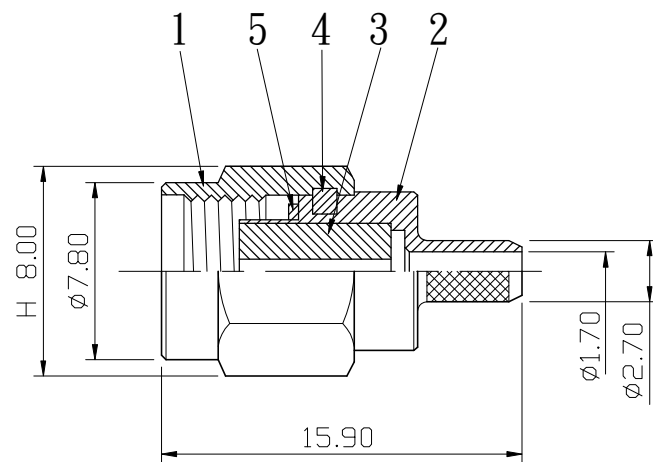

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)



S 1 : 1

7	ferrule	1	brass	gold		DIMENSIONS ARE IN MILLIMETERS UNLESS OTRWISE PECIFIED TOLERANCES (一般公差) 0.5~6 = ±0.2 >6~30 = ±0.4 >30~120 = ±0.6 >120~315 = ±1 >315~1000 = ±1.6 ANGLES(角度) = ±5°				CHECKED	 雅鈦企業有限公司 Aec Connectors Co., Ltd.			
6	contact pin	1	brass	gold						DRAWN <i>Jim</i>		TITLE	SMA MALE CRIMP TYPE FOR RG-174/U,188/U,316/U	
5	gasket	1	silicon	red								DATE 2007. 12. 06	DRAWING NO.	SA-1001GTG-SC1715
4	C ring	1	steel	passivate									FILE NO.	DRAWING\RF\SA\SA-1001GTG-SC1715
3	insulator	1	PTFE	white										
2	body	1	brass	gold										
1	shell	1	brass	gold										
NO.	Description	Unit	Materials	Finish	Drawing No.	SCALE	3 : 1	UNIT	MM					