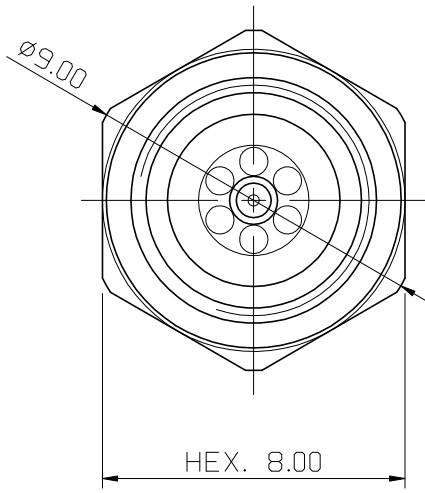
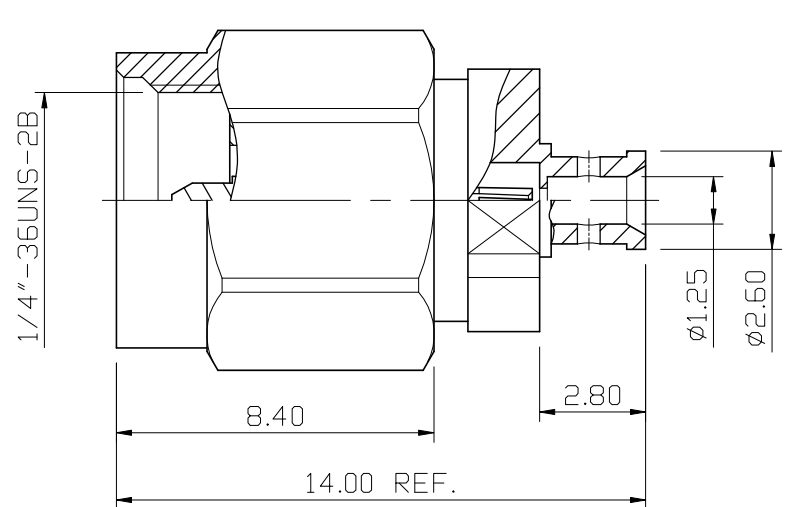
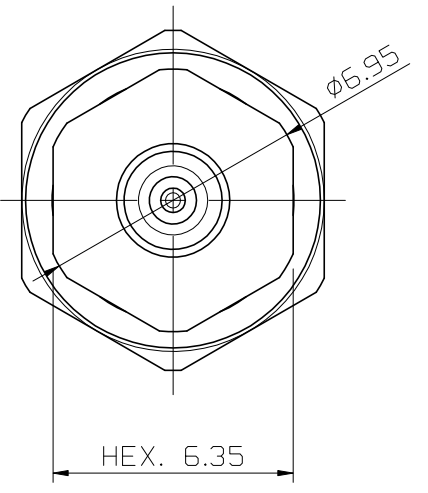




No.	DATE	DESCRIPTION	REV	REMARK : RoHS REQUIREMENT APPLIED (符合RoHS)				DATE	DRAWING NO.		
     S 1 : 1 Electrical Specification: 1.Impedance : 50 ohm 2.Frequency Range : DC ~ 40GHz											
7	shell	1	SUS303	passivated	DIMENSIONS ARE IN MILLIMETERS UNLESS OTHRWISE PECIFIED TOLERANCES (一般公差) 0.5~6 = ±0.2 >6~30 = ±0.4 >30~120 = ±0.6 >120~315 = ±1 >315~1000 = ±1.6 ANGLES(角度) = ±5°				CHECKED	 雅鈦企業有限公司 Aec Connectors Co., Ltd. TITLE 2.92mm MALE SOLDER TYPE FOR .047 CABLE DRAWING NO. KS-1007GIG-SF1015 FILE NO. DRAWING\RF\KS\KS-1007GIG-SF1015	
6	gasket	1	silicone	red					DRAWN Jordan		
5	c ring	1	steel	none							
4	body b	1	brass	gold							
3	contact pin	1	beryllium copper	gold (3u")					DATE 2024. 03. 21		
2	insulator	1	PEI	nature							
1	body a	1	brass	gold							
NO.	Description	Unit	Materials	Finish	Drawing No.	SCALE 5 : 1 UNIT MM					