

## 2.92mm Male + hc 10000-3(.047") + 2.92mm Male TECHNICAL DATA SHEET


### Features

- Frequency up to 40 GHz
- Low Loss
- Semi-rigid cable

### Applications

- Communication receivers and transmitters
- Environmental and test chambers

### Outline Drawing (Unit:mm)

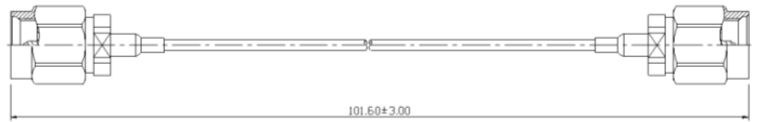

### KS-1007GIG-SF1015+hc10000-3

### Electrical Specification

|                 |               |
|-----------------|---------------|
| Frequency Range | DC ~ 40GHz    |
| Insertion Loss  | 1.5dB Max.    |
| VSWR            | 1.35 : 1 Max. |

Storage & Operating Temperature : -55°C to +85°C

### Mechanical Specification

| PART        | TYPE        | PLATED     |
|-------------|-------------|------------|
| Connector 1 | 2.92mm Male | PASSIVATED |
| Connector 2 | 2.92mm Male | PASSIVATED |
| Cable       | .047"       | COPPER/TIN |

