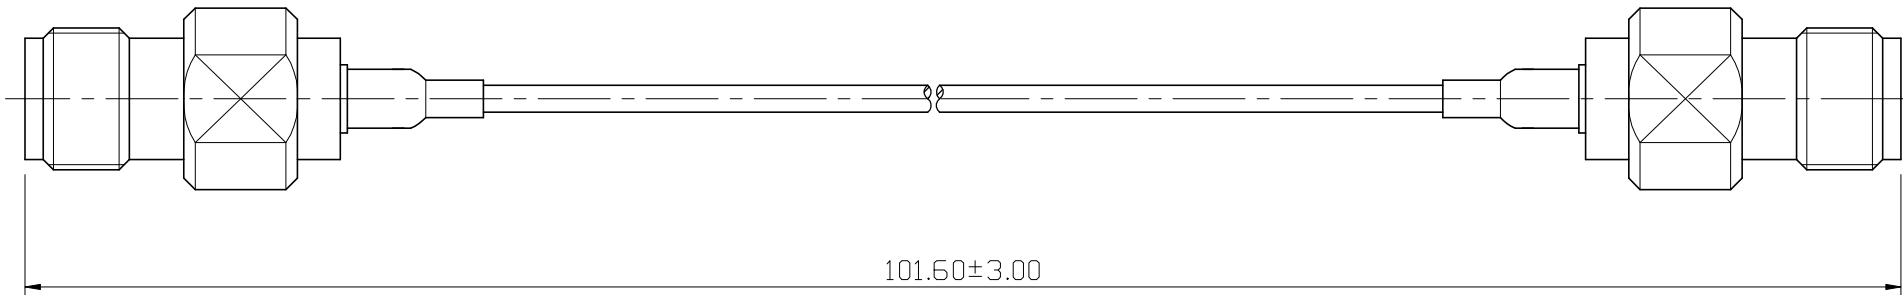



No.	DATE	DESCRIPTION	REV	REMARK : RoHS REQUIREMENT APPLIED (符合RoHS)				DATE	DRAWING NO.	
 Electrical Specification : 1.Frequency Range : DC ~ 40GHz 2.VSWR : 1.5:1 max. 3.Insertion Loss : 1.5dB max.  S 1 : 1										
7						DIMENSIONS ARE IN MILLIMETERS UNLESS OTHRWISE PECIFIED TOLERANCES (一般公差) 0.5~6 = ±0.2 >6~30 = ±0.4 >30~120 = ±0.6 >120~315 = ±1 >315~1000 = ±1.6 ANGLES(角度) = ±5°		CHECKED	 雅鈦企業有限公司 Aec Connectors Co., Ltd. TITLE 2.92mm Straight Female To Female with hc 10000-3(.047") Cable Assembly DRAWING NO. KS-1008PIG-SF1025+hc10000-3(.047") FILE NO. DRAWING\RFCA\KS-1008PIG-SF1025+hc10000-3(.047")	
6										
5										
4										
3	cable	1	copper	tin				DRAWN Jordan		
2	heat tubing	2	PVC	black						
1	2.92mm female	2	SUS303	passivated		DATE 2025. 08. 19				
NO.	Description	Unit	Materials	Finish	Drawing No.	SCALE	3 : 1	UNIT	MM	