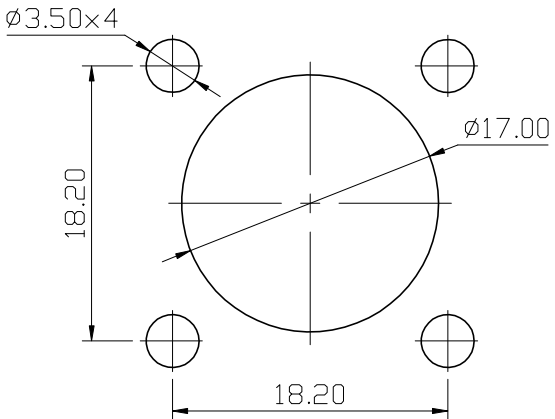
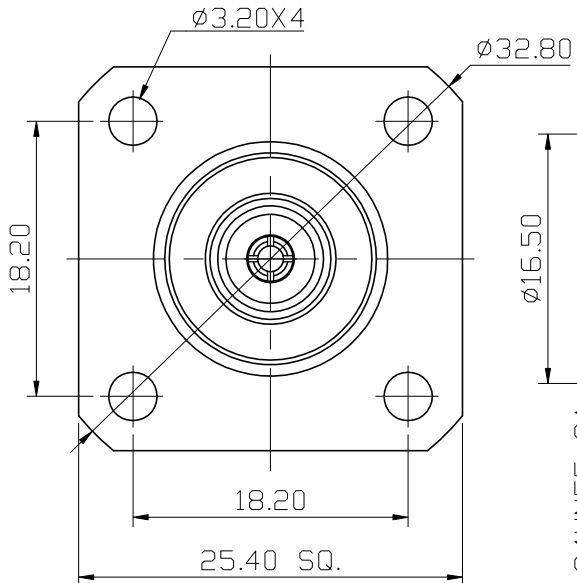
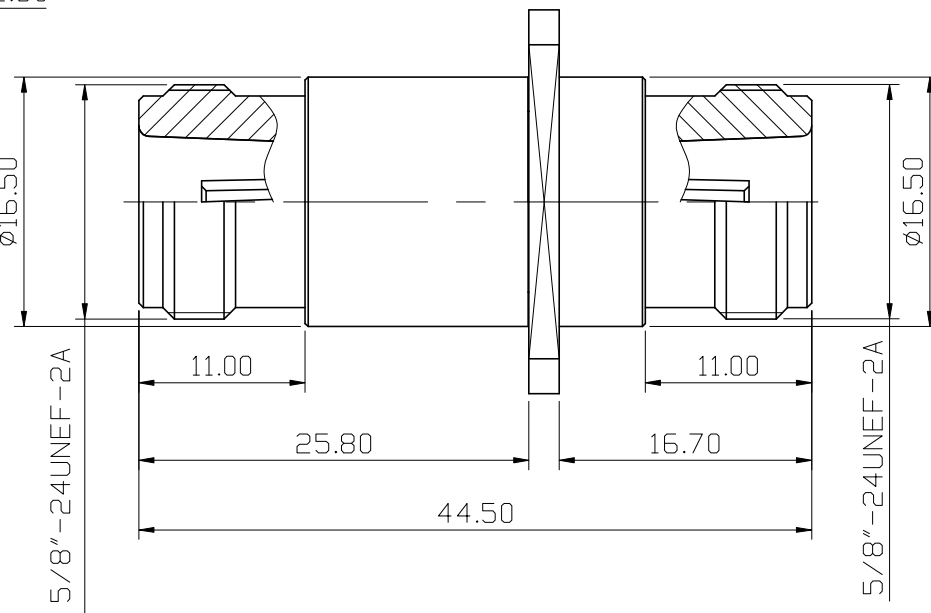



No.	DATE	DESCRIPTION	REV	REMARK : RoHS REQUIREMENT APPLIED (符合RoHS)	DATE	DRAWING NO.
 RECOMMENDED MOUNTING HOLE (建議架設孔)    S 1 : 1 Electrical Specification : 1.Impedance : 50 Ohms 2.Frequency Range : DC~18 GHz 3.VSWR : 1.25:1 max.						
-	body b	1	brass	nickel		
-	contact pin	1	beryllium copper	gold(3u")		
-	insulator	2	PTFE	white		
-	body a	1	brass	nickel		
NO.	Description	Unit	Materials	Finish	Drawing No.	

DIMENSIONS ARE IN MILLIMETERS				CHECKED		 雅鈦企業有限公司 Aec Connectors Co., Ltd.	
UNLESS OTHRWISE PECIFIED TOLERANCES (一般公差) 0.5~6 = ±0.2 >6~30 = ±0.4 >30~120 = ±0.6 >120~315 = ±1 >315~1000 = ±1.6 ANGLES(角度) = ±5°				DRAWN Owen			TITLE N FEMALE TO N FEMALE 4 HOLE PANEL ADAPTOR
				DATE 2024. 12. 09			DRAWING NO. ADT-1912S-NS25TA-NS25TA
SCALE 2 : 1 UNIT MM							FILE NO. DRAWING\RFADT\ADT-1912S-NS25TA-NS25TA