


## 2.92mm Male + SS405-40GHz + 2.92mm Male TECHNICAL DATA SHEET

### Features

- Frequency up to 40 GHz
- Low Loss
- Hand formable to almost any custom shape without special bending tools

Outline Drawing (Unit:mm)

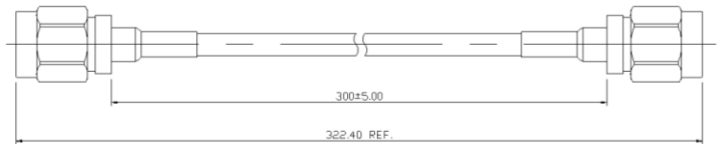

### Applications

- Communication receivers and transmitters
- Environmental and test chambers

**KS-1007GIG-SF1515+SS405(40GHz)**

Electrical Specification	
Frequency Range	DC ~ 40GHz
Insertion Loss	2.5dB Max.
VSWR	1.5 : 1 Max.

Storage & Operating Temperature : -55°C to +85°C

Mechanical Specification		
PART	TYPE	PLATED
Connector 1	2.92mm Male	PASSIVATED
Connector 2	2.92mm Male	PASSIVATED
Cable	.086"	Blue FEP

