



No.	DATE	DESCRIPTION	REV	REMARK : RoHS REQUIREMENT APPLIED (符合RoHS)	DATE	DRAWING NO.
-----	------	-------------	-----	---	------	-------------

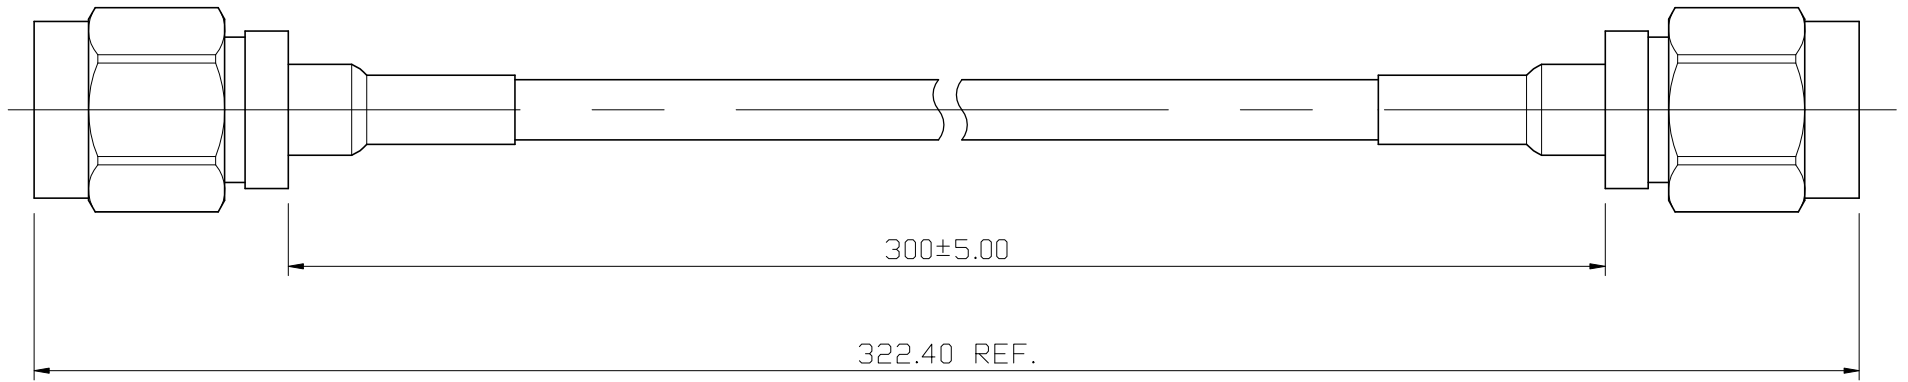


Electrical Specification :

- 1.Frequency Range : DC ~ 40GHz
- 2.VSWR : 1.5:1 max.
- 3.Insertion Loss : 2.5dB max.



S 1 : 1

7						DIMENSIONS ARE IN MILLIMETERS  UNLESS OTHERWISE PECIFIED TOLERANCES (一般公差) 0.5~6 = ±0.2 >6~30 = ±0.4 >30~120 = ±0.6 >120~315 = ±1 >315~1000 = ±1.6 ANGLES(角度) = ±5°	CHECKED	 <b>雅鈦企業有限公司</b> Aec Connectors Co., Ltd.	
6					DRAWN <i>Jordan</i>				TITLE 2.92mm Straight Male To Male with SS405-40GHz Cable Assembly
5							DATE 2024. 11. 01		DRAWING NO. <b>KS-1007GIG-SF1515+SS405(40GHz)</b>
4							FILE NO. DRAWING\RFCA\KS-1007GIG-SF1515+SS405(40GHz)		
3	cable	1		blue					
2	heat tubing	2	PVC	black					
1	2.92mm male	2	SUS303	passivated					
NO.	Description	Unit	Materials	Finish	Drawing No.	SCALE	3 : 1	UNIT	MM