

## SMPM FEMALE TO SMPM FEMALE ADAPTOR DATA SHEET

### Features

- Push/Snap-on locking for fast and easy disconnection
- Radial and axial misalignment using bullets in different lengths

### Applications

- 5G mobile telecommunications, test & measurement and aerospace applications.




**ADT-3043S-MP25TG-MP25TG**

Electrical Specification	
Frequency Range	DC ~ 65GHz
Impedance	50Ω
VSWR	1.2 : 1 Max.@DC~26.5GHz 1.4 : 1 Max.@26.5~40GHz 1.6 : 1 Max.@40~65GHz


Storage & Operating Temperature : -55°C to 165°C

Mechanical Specification		
PART	MATERIAL	PLATED
Body	BERYLLIUM COPPER	GOLD
Center Conductor	BERYLLIUM COPPER	GOLD
Insulator	PTFE	WHITE

Tr1 S11 Refl SWR RefLvl: 1 U Res: 100 mU/Div

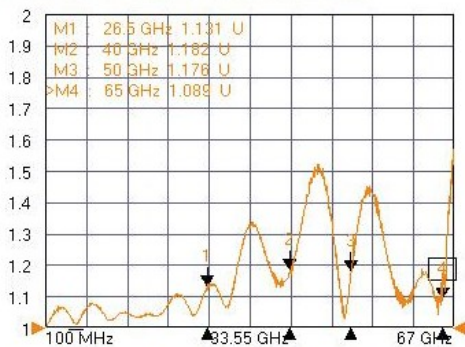

Tr2 S22 Refl SWR RefLvl: 1 U Res: 100 mU/Div

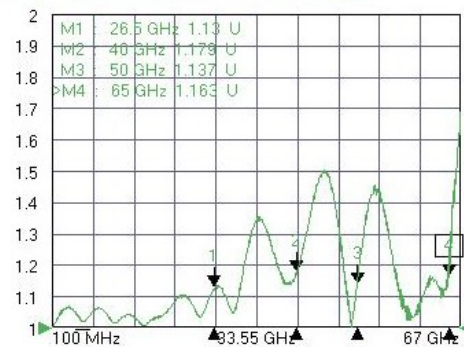

Tr3 S12 Trans LogM RefLvl: 0 dB Res: 2 dB/Div

