


No.	DATE	DESCRIPTION	REV	REMARK : RoHS REQUIREMENT APPLIED (符合RoHS)	DATE	DRAWING NO.

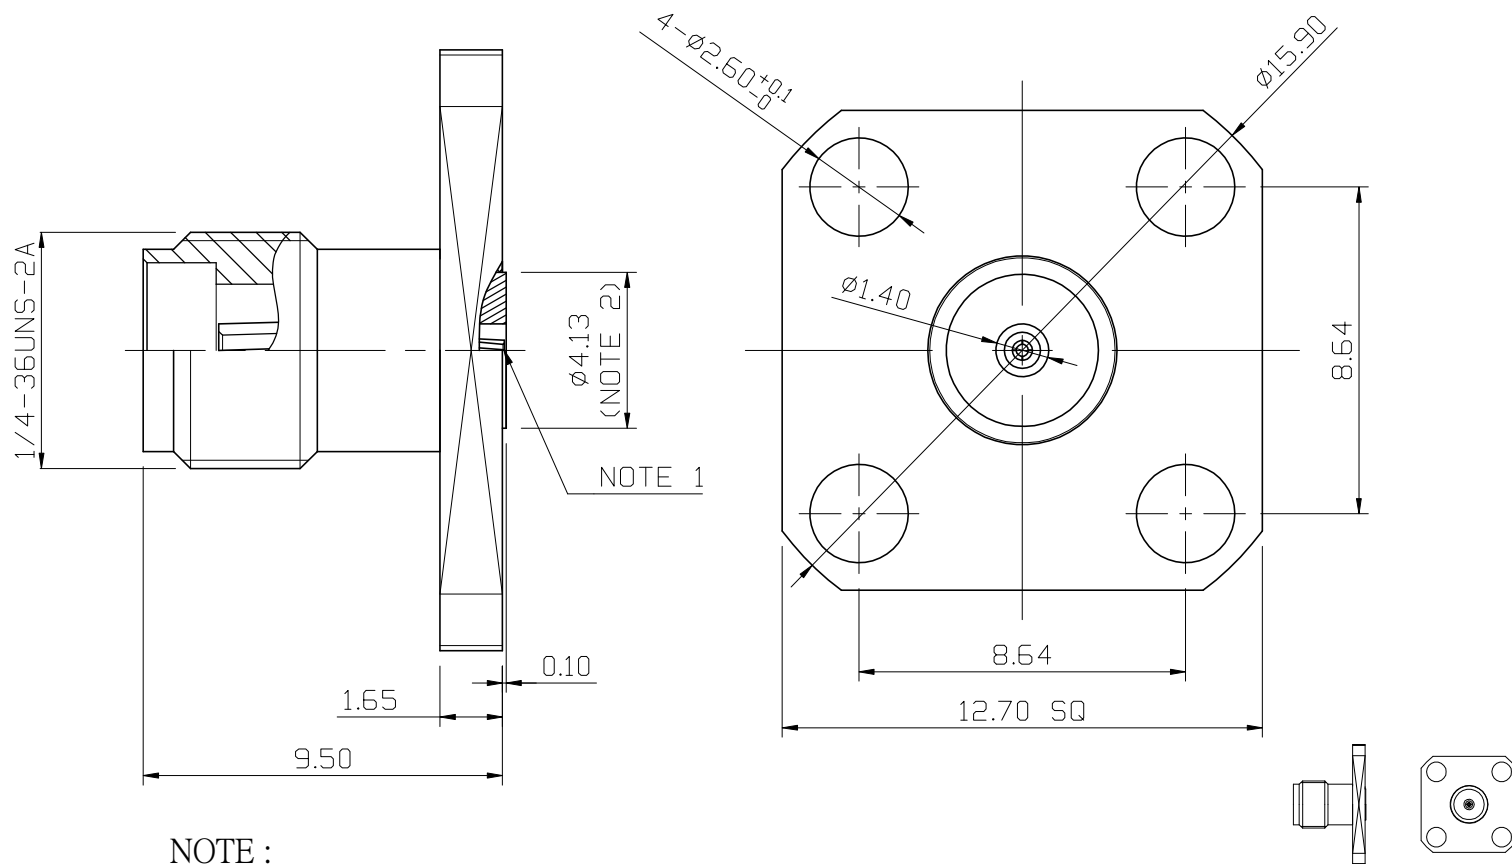

Electrical Specification:

- 1.Impedance : 50 ohm
- 2.Frequency Range : DC ~ 34 GHz
- 3.VSWR : 1.2 max.

NOTE :

- 1.Accept Pin Zize Ø0.38
- 2.Separate Metal Contact Ring

S 1 : 1

-						DIMENSIONS ARE IN MILLIMETERS				CHECKED	 雅鈦企業有限公司 Aec Connectors Co., Ltd.		
-													
-	body c	1	brass	gold		UNLESS OTHRWISE PECIFIED TOLERANCES (一般公差) 0.5~6 = ±0.2 >6~30 = ±0.4 >30~120 = ±0.6 >120~315 = ±1 >315~1000 = ±1.6 ANGLES(角度) = ±5°				DRAWN		TITLE 3.5mm FEMALE 4-HOLE FLANGE (ACCEPTS 0.38MM PIN)	
-	body b	1	SUS303	passivated						<i>Jordan</i>		DRAWING NO.	
-	contact pin	1	beryllium copper	gold (3u")								DATE	3.5-1003PIG-SE0025
-	insulator	1	PEI	nature									
-	body a	1	SUS303	passivated								SCALE 5 : 1 UNIT MM	
NO.	Description	Unit	Materials	Finish	Drawing No.								