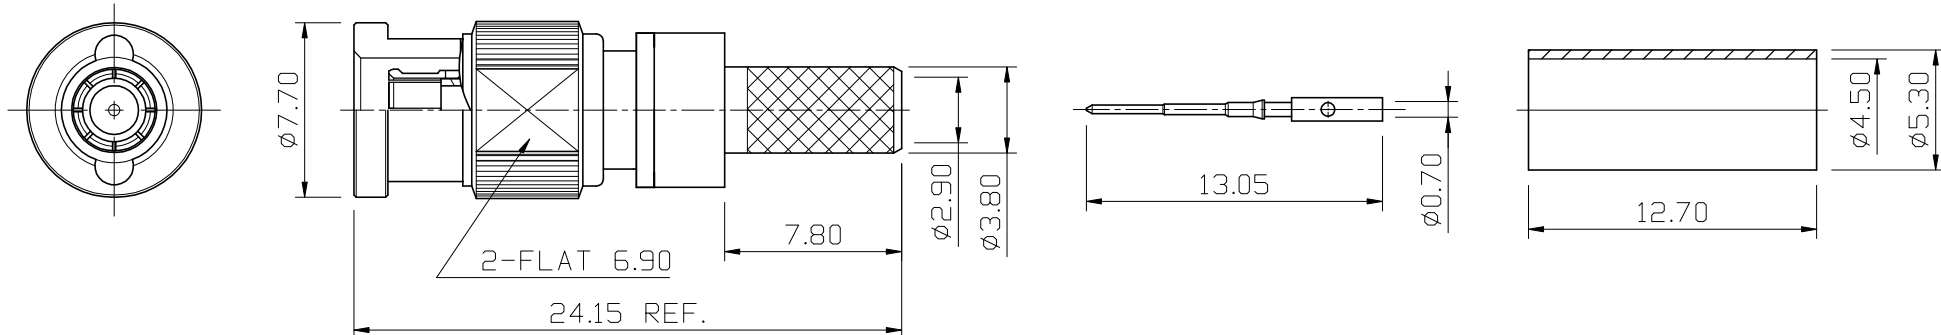
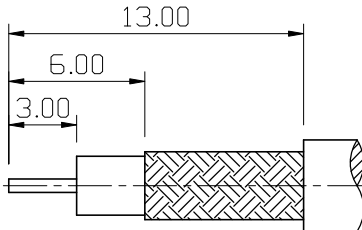



No.	DATE	DESCRIPTION	REV	REMARK : RoHS REQUIREMENT APPLIED (符合RoHS)				DATE	DRAWING NO.
 Electrical Specification : 1.Impedance : 75 Ohm 2.Frequency Range : DC ~ 12GHz 3.VSWR : 1.2 Max. @DC ~ 6GHz (up to 12GHz)  RECOMMENDED CABLE STRIPPING DIM'S (建議剝線尺寸)  S 1 : 1									
-	ferrule	1	brass	nickel	DIMENSIONS ARE IN MILLIMETERS UNLESS OTHRWISE PECIFIED TOLERANCES (一般公差) 0.5~6 = ±0.2 >6~30 = ±0.4 >30~120 = ±0.6 >120~315 = ±1 >315~1000 = ±1.6 ANGLES(角度) = ±5°	CHECKED	 雅鈦企業有限公司 Aec Connectors Co., Ltd.		
-	contact pin	1	beryllium copper	gold(3u")					
-	body b	1	brass	nickel					
-	ring b	1	brass	nickel		DRAWN <i>Jordan</i>	TITLE MICRO BNC STRAIGHT PLUG CRIMP FOR 1855A & MINI-59U CABLE , 75 Ohm		
-	spring	1	stainless steel	none					
-	ring a	1	brass	nickel		DATE 2025. 02. 24	DRAWING NO. MOBC-1001NTG-SC6717		
-	gasket	1	silicon	black					
-	insulator	1	PTFE	white		SCALE 3 : 1 UNIT MM	FILE NO. DRAWINGRFRMOBCMOBC-1001NTG-SC6717		
-	body a	1	beryllium copper	nickel					
-	shell	1	brass	nickel					
NO.	Description	Unit	Materials	Finish	Drawing No.				