



No.	DATE	DESCRIPTION	REV	REMARK : RoHS REQUIREMENT APPLIED (符合RoHS)	DATE	DRAWING NO.

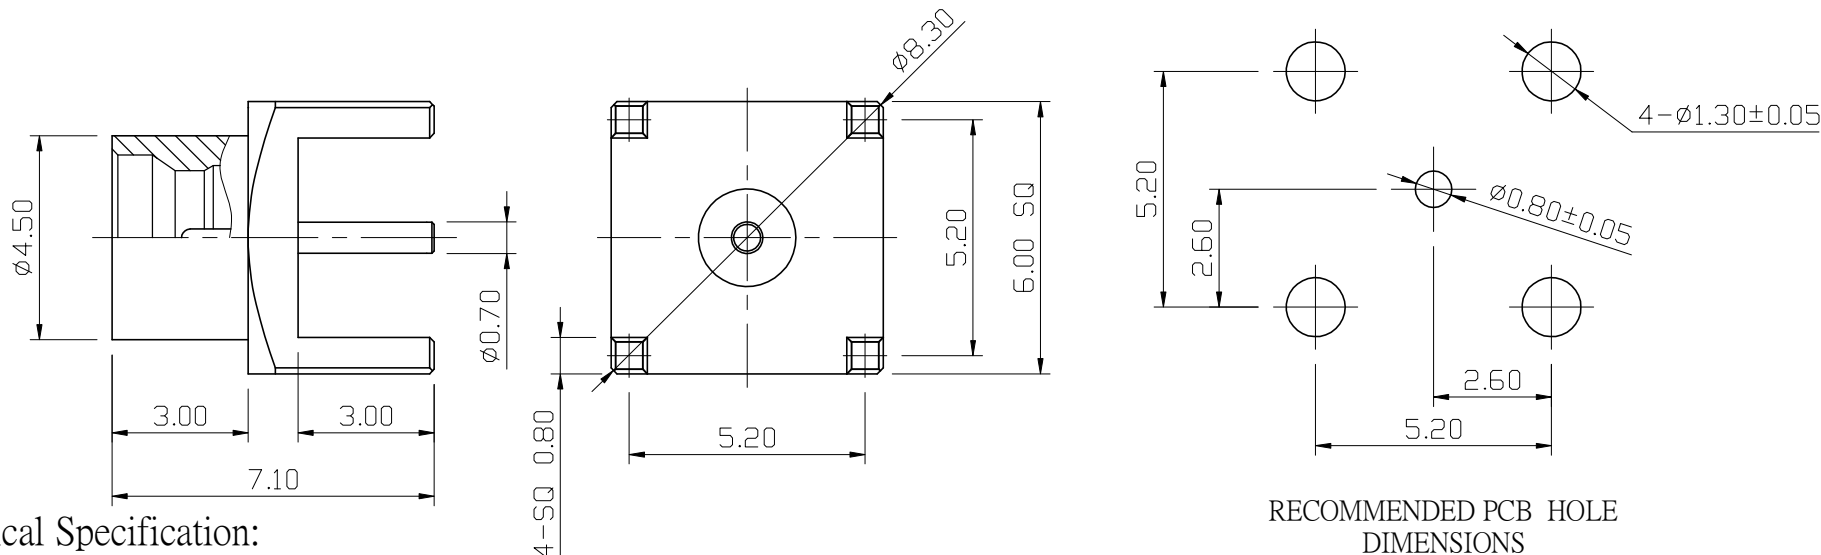

Electrical Specification:

- 1.Impedance : 50 ohm
- 2.Frequency Range : DC ~40 GHz
- 3.VSWR : 1.35:1 max.

NOTE : The specifications is only for connector.
Performance will very baesd on PCB layout.



-						DIMENSIONS ARE IN MILLIMETERS				CHECKED	 雅鈦企業有限公司 Aec Connectors Co., Ltd.				
-												UNLESS OTHRWISE PECIFIED TOLERANCES (一般公差) 0.5~6 = ±0.2 >6~30 = ±0.4 >30~120 = ±0.6 >120~315 = ±1 >315~1000 = ±1.6 ANGLES(角度) = ±5°			
-															
-															
-	contact pin	1	brass	gold(3u")						DRAWN	TITLE SMP MALE PCB MOUNT (FULL DETENT)				
-	insulator	1	PTFE	white						<i>Owen</i>	DRAWING NO.				
-	body	1	brass	gold						DATE	SP-1006GTG-SA0015				
NO.	Description	Unit	Materials	Finish	Drawing No.	SCALE	6 : 1	UNIT	MM	2026. 03. 23	FILE NO. DRAWING\RF\SP\SP-1006GTG-SA0015				