


The FFCC-P2 Series Connection Cabinets offer quick connection to a mobile generator or load bank. They can be penetrated from the top, bottom or sides to allow for facility wiring. These units are equipped with colour coded camlock receptacles allowing for easy connection and also a molded case breaker or switch. Additionally, units can be assembled for service entrance applications. Assemblies are available with up to 4000A mains and are certified to cULus standards.

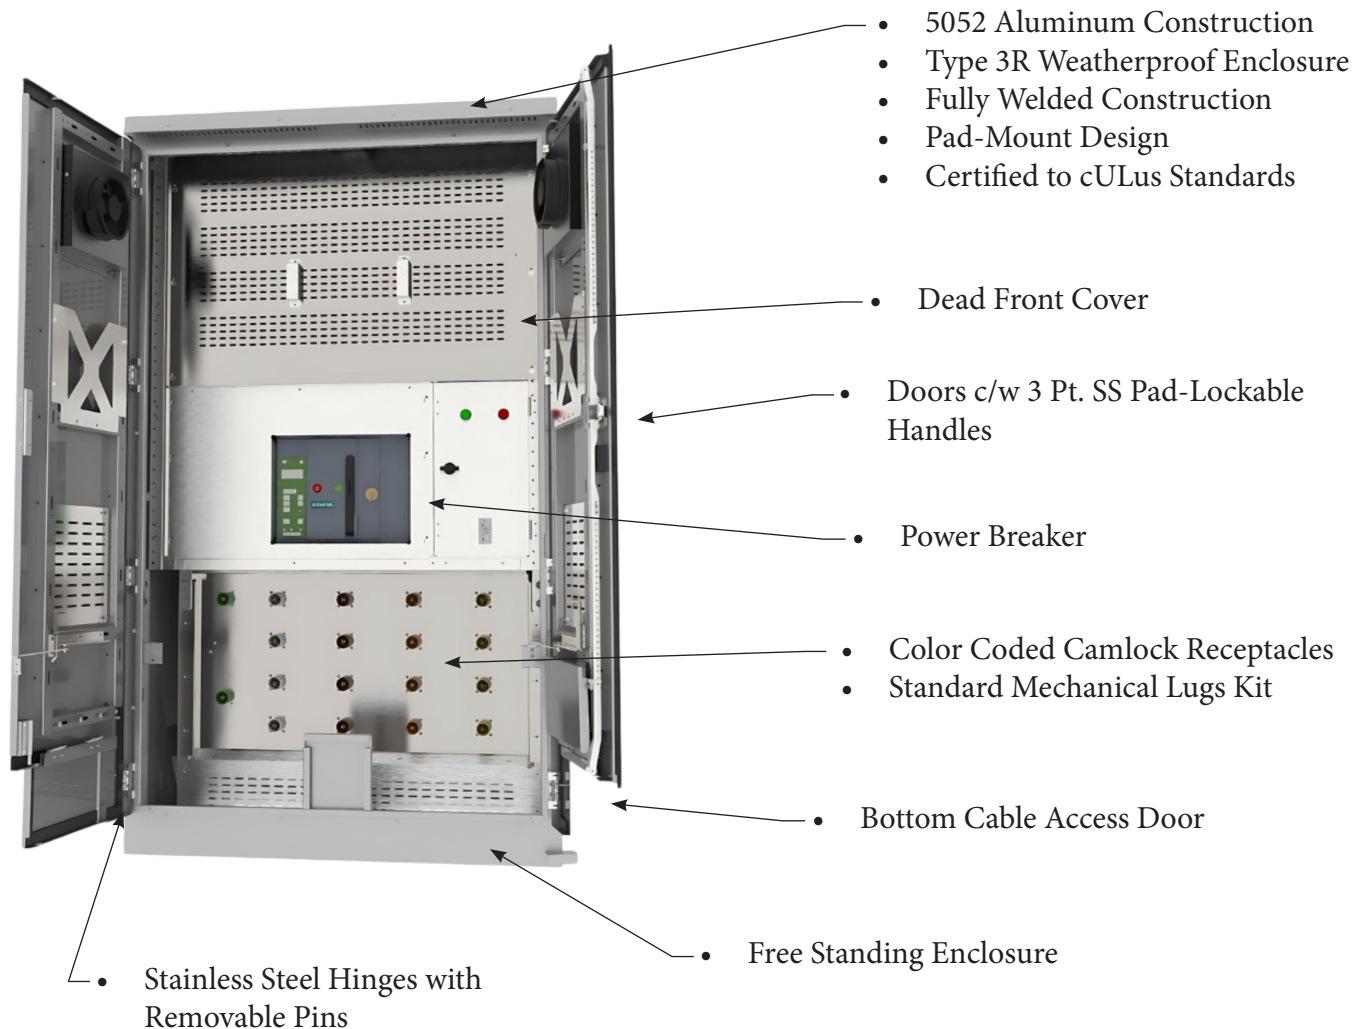


Rev 3.3

# Connection Cabinets

## FFCC-P2 (Single) Series




### One-Line Diagram

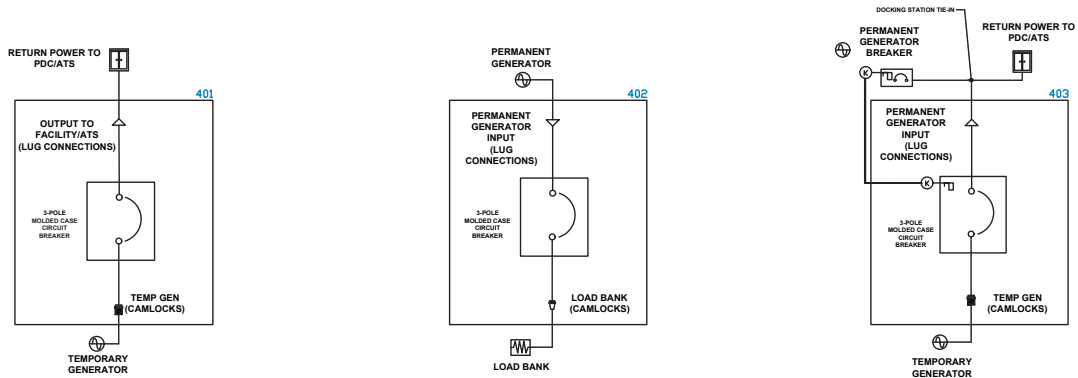

**SINGLE BREAKER DOCKING STATION  
TEMPORARY GENERATOR  
CONFIGURATION**

**SINGLE BREAKER DOCKING STATION  
LOAD BANK  
CONFIGURATION**


**SINGLE BREAKER DOCKING STATION  
SYSTEM IS INTERLOCK WITH  
UPSTREAM GENERATOR VIA KIRK KEY**

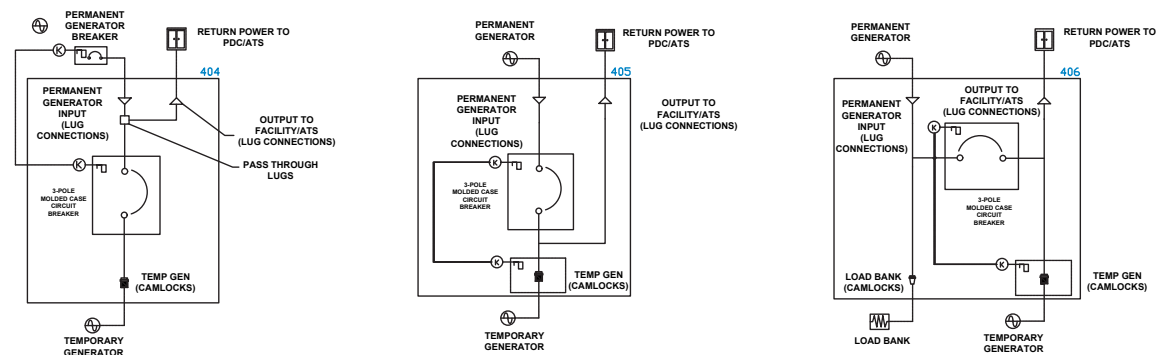

**SINGLE BREAKER DOCKING STATION -  
SYSTEM BREAKER IS INTERLOCKED WITH  
UPSTREAM GENERATOR BREAKER VIA KIRK KEY.  
INCLUDES PASS THROUGH LUGS**

**SINGLE BREAKER DOCKING STATION -  
SYSTEM BREAKER INTERLOCKED WITH  
PORTABLE GENERATOR CAMLOCK COVER  
VIA KIRK KEY**

**SINGLE BREAKER DOCKING STATION -  
DUAL PURPOSE PASS THROUGH - SYSTEM  
BREAKER INTERLOCKED WITH PORTABLE  
CAMLOCK COVER VIA KIRK KEY**

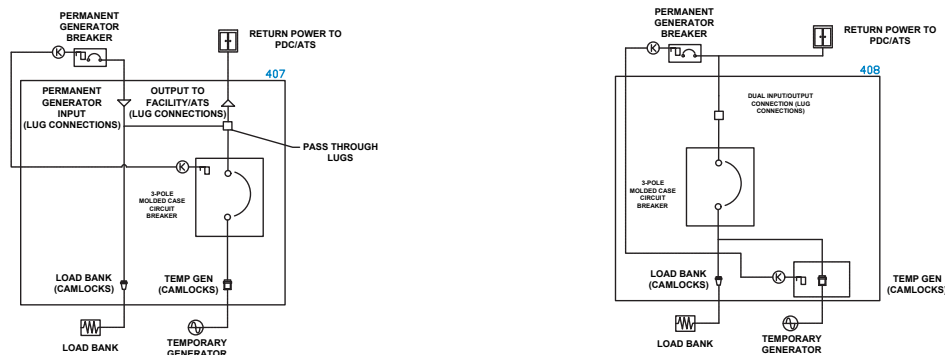

**SINGLE BREAKER DOCKING STATION -  
SYSTEM BREAKER IS INTERLOCKED WITH UPSTREAM  
GENERATOR BREAKER VIA KIRK KEY.  
INCLUDES DUAL PURPOSE PASS THROUGH LUGS**

**SINGLE BREAKER DOCKING STATION -  
PORTABLE GENERATOR CAMLOCK COVER INTERLOCKED  
WITH UPSTREAM  
GENERATOR BREAKER VIA KIRK KEY.  
INCLUDES DUAL PURPOSE PASS THROUGH LUGS**

Rev 3.3

**Foxfab Power Solutions**


#102, 18725 - 25th Ave, Surrey, BC Canada, V3Z 2A1 Toll Free: (877) 468-0305 Email: [Quotes@foxfab.com](mailto:Quotes@foxfab.com)

# Connection Cabinets

## FFCC-P2 (Single) Series



### Product Selector

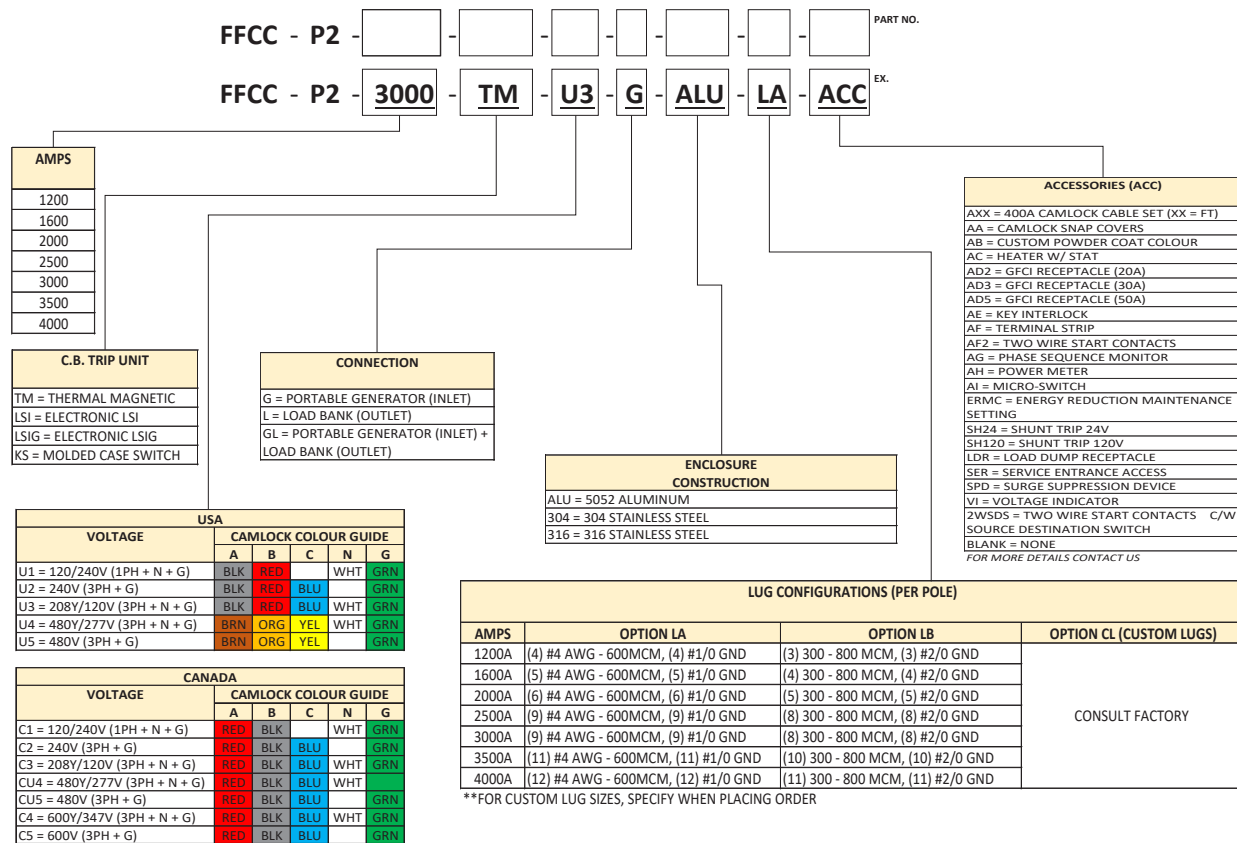

### Max Ratings

- 4000A
- 600VAC

### Dimensions & Est. Weights

GENERATOR/LOAD BANK

- 72"H x 36"W x 30"D (1200A)
- 78"H x 45"W x 38"D (2800A)
- 78"H x 60"W x 38"D (3200A)
- 90"H x 100"W x 36"D (4000A)

520LB  
600LB  
1560LB  
2200LB

GENERATOR & LOAD BANK - DUAL PURPOSE

- 72"H x 36"W x 30"D (1200A) 520LB
- 78"H x 60"W x 38"D (2000A) 1270LB
- 90"H x 75"W x 30"D (3200A) 1610LB
- 90"H x 100"W x 36"D (4000A) 2200LB

Bottom Entry

- Consult factory for sizing

Rev 3.3

Foxfab Power Solutions

#102, 18725 - 25th Ave, Surrey, BC Canada, V3Z 2A1 Toll Free: (877) 468-0305 Email: [Quotes@foxfab.com](mailto:Quotes@foxfab.com)