


Connection Cabinets

FFTS-M2F Series



The FFTS-M2F Series Connection Cabinets offer quick connection to a mobile generator, allowing temporary power to be received quickly and safely. These units are equipped with a fused manual transfer switch and are available with optional indicating lights, providing a quick visual status on normal/emergency supply selection. Additionally, these units are equipped with mechanical lugs, allowing for easy connection. Assemblies are available with up to 4000A mains and are certified to cULus standards.

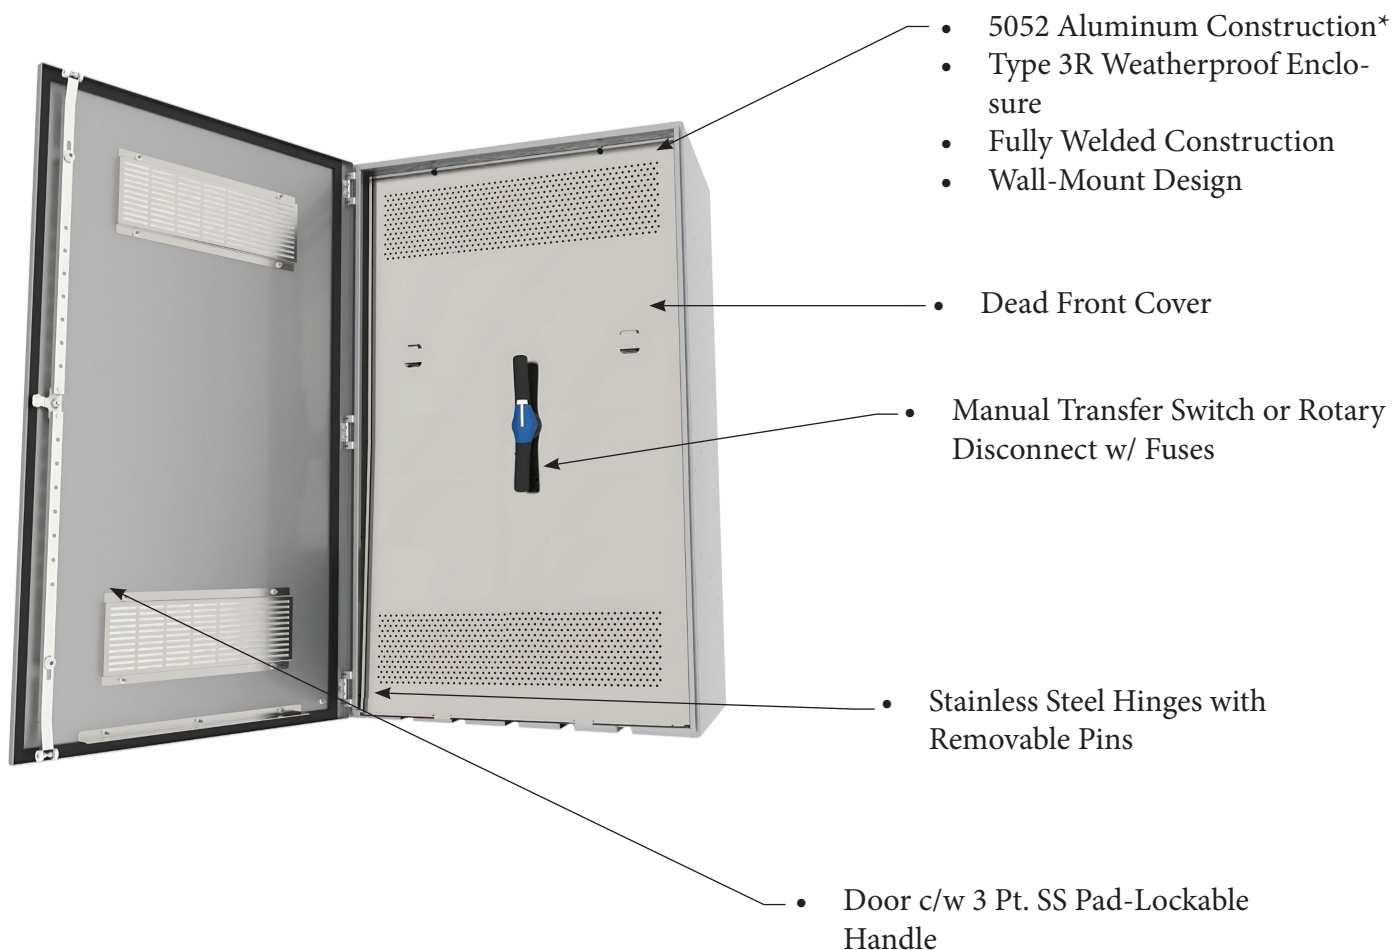

*Depends on enclosure size

Rev 3.3


Foxfab Power Solutions

#102, 18725 - 25th Ave, Surrey, BC Canada, V3Z 2A1

Toll Free: (877) 468-0305

Email: Sales@foxfab.com

One-Line Diagram

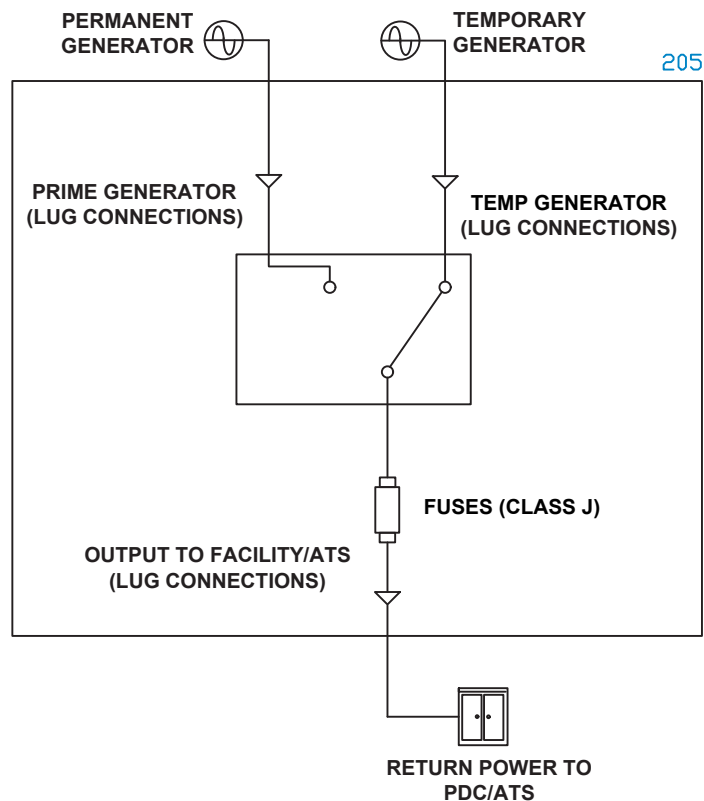

**FUSED ROTARY MANUAL
TRANSFER SWITCH**

Rev 3.3

Connection Cabinets

FFTS-M2F Series



Product Selector

FFTS - M2F - - - - - PART NO.

FFTS - M2F - **800** - **V7** - **ALU** - **LA** - **AC** EX.

AMPS	VOLTAGE	ENCLOSURE CONSTRUCTION	ACCESSORIES (ACC)
100	V1 = 120/240V (1PH + N + G)	CRS = Cold Rolled Steel	PL = PILOT LIGHT
200	V2 = 240V (3PH + G)	ALU = 5052 ALUMINUM	AB = CUSTOM POWDER COAT COLOUR
400	V3 = 208Y/120V (3PH + N + G)	304 = 304 STAINLESS STEEL	AC = HEATER W/ STAT
600	V4 = 480Y/277V (3PH + N + G)	316 = 316 STAINLESS STEEL	AF = TERMINAL STRIP
800	V5 = 480V (3PH + G)		AG = PHASE SEQUENCE MONITOR
1200	V6 = 600Y/347V (3PH + N + G)		AH = POWER METER
1600	V7 = 600V (3PH + G)		AI = MICRO-SWITCH
2000			BLANK = NONE
2500			FOR MORE DETAILS CONTACT US
3000			
3500			
4000			

LUG CONFIGURATIONS (PER POLE)			
AMPS	OPTION LA	OPTION LB	OPTION CL (CUSTOM LUGS)
100A	(1) #6 AWG - 250MCM, (1) #2 GND	(1) #4 AWG - 600MCM, (1) #1/0 GND	CONSULT FACTORY
200A	(1) #6 AWG - 250MCM, (1) #2 GND	(1) #4 AWG - 600MCM, (1) #1/0 GND	
400A	(2) #6 AWG - 250MCM, (2) #2 GND	(1) #4 AWG - 600MCM, (1) #1/0 GND	
600A	(2) #4 AWG - 600MCM, (2) #1/0 GND	(2) 300 - 800 MCM, (2) #2/0 GND	
800A	(3) #4 AWG - 600MCM, (3) #1/0 GND	(2) 300 - 800 MCM, (2) #2/0 GND	
1200A	(4) #4 AWG - 600MCM, (4) #1/0 GND	(3) 300 - 800 MCM, (3) #2/0 GND	
1600A	(5) #4 AWG - 600MCM, (5) #1/0 GND	(4) 300 - 800 MCM, (4) #2/0 GND	
2000A	(6) #4 AWG - 600MCM, (6) #1/0 GND	(5) 300 - 800 MCM, (5) #2/0 GND	
2500A	(8) #4 AWG - 600MCM, (8) #1/0 GND	(6) 300 - 800 MCM, (6) #2/0 GND	
3000A	(9) #4 AWG - 600MCM, (9) #1/0 GND	(8) 300 - 800 MCM, (8) #2/0 GND	
3500A	(11) #4 AWG - 600MCM, (11) #1/0 GND	(10) 300 - 800 MCM, (10) #2/0 GND	
4000A	(12) #4 AWG - 600MCM, (12) #1/0 GND	(11) 300 - 800 MCM, (11) #2/0 GND	

**FOR CUSTOM LUG SIZES, SPECIFY WHEN PLACING ORDER

Max Ratings

- 4000A
- 600VAC

Dimensions & Est. Weights

• 36"H x 24"W x 12"D (200A) - CRS	3P & 4P	TBD
• 48"H x 36"W x 20"D (260A - 400A) - CRS	3P & 4P	TBD
• 60"H x 36"W x 24"D (500A - 800A)	3P & 4P	380 LB
• 72"H x 36"W x 30"D (1000A - 1200A)	3P & 4P	TBD
• 90"H x 75"W x 30"D (1600A - 3000A) BoltSW	3P	1400 LB
• 90"H x 100"W x 36"D (1600A -3000A) BoltSW	4P	TBD
• 90"H x 100"W x 36"D (4000A) BoltSW	3P	TBD

Rev 3.3

Foxfab Power Solutions

#102, 18725 - 25th Ave, Surrey, BC Canada, V3Z 2A1

Toll Free: (877) 468-0305

Email: Sales@foxfab.com