


Connection Cabinets

FFCC-C2 Series



The FFCC-C2 Series Connection Cabinets offer quick connection to a mobile generator or load bank. These units are equipped with a manual transfer switch enabling switching to a mobile generator or load bank. Units can also be specified with a rotary disconnect. Units come complete with colour coded camlock receptacles allowing for easy connection and can also be assembled for service entrance applications. Assemblies are available with up to 1200A mains and are certified to cULus standards.

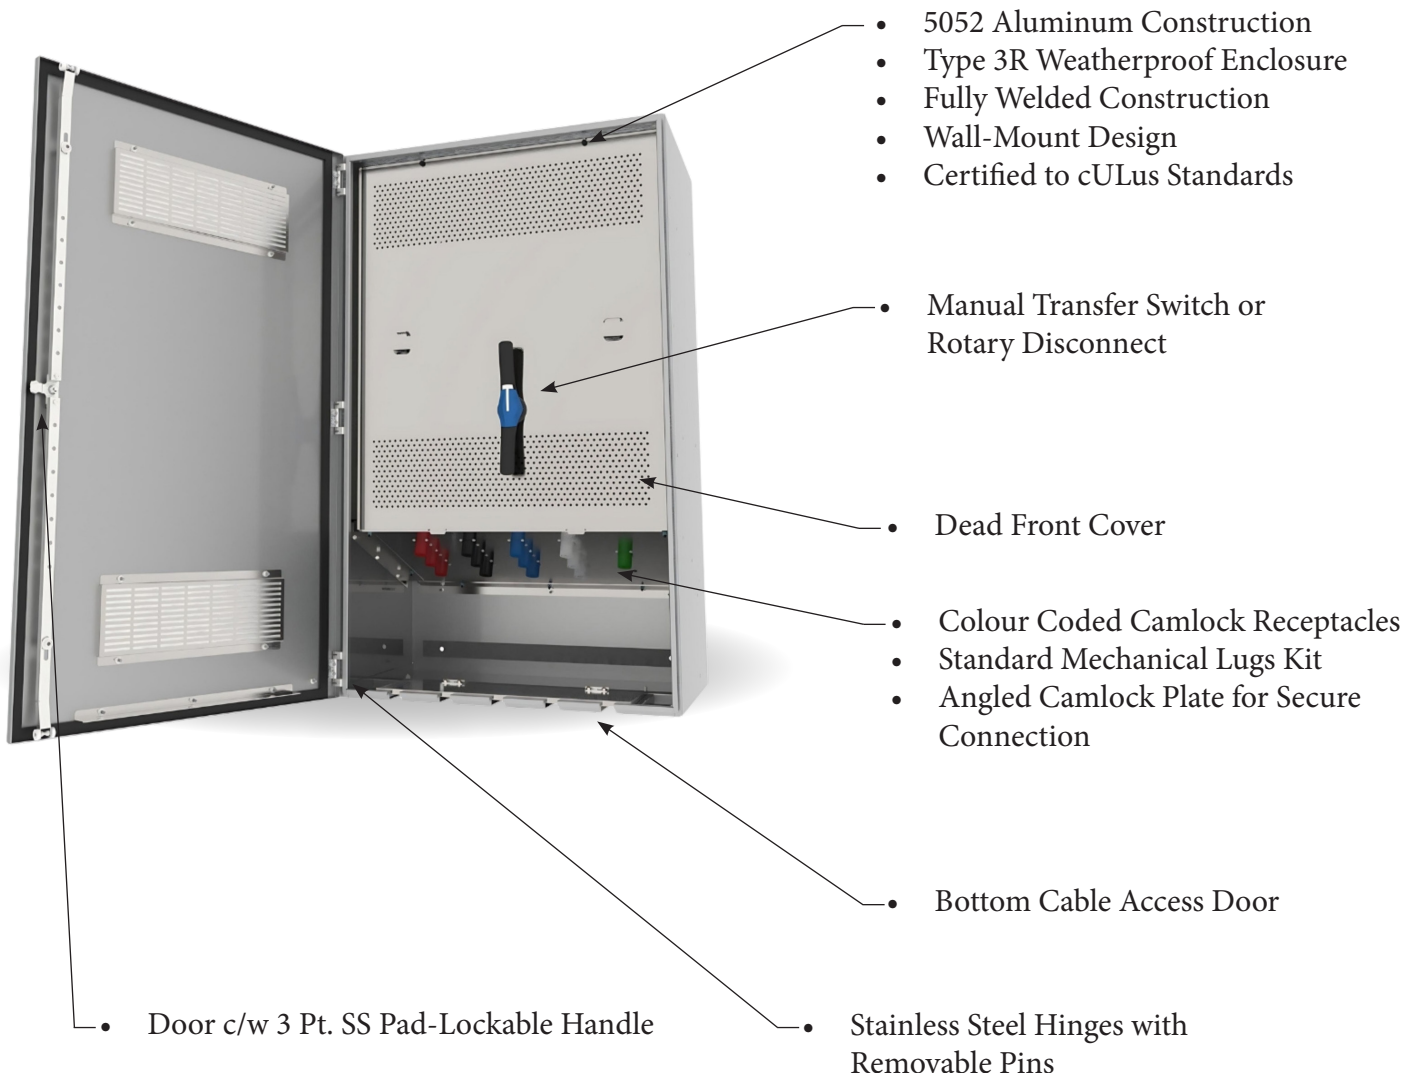

Rev 3.3

Foxfab Power Solutions

#102, 18725 - 25th Ave, Surrey, BC Canada, V3Z 2A1

Toll Free: (877) 468-0305


Email: Quotes@foxfab.com

Connection Cabinets


FFCC-C2 Series




One-Line Diagram

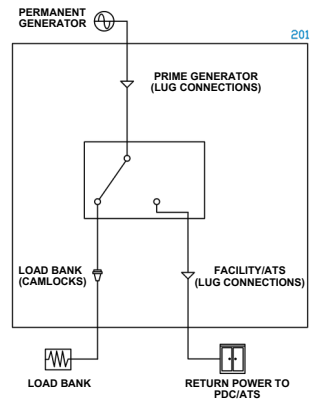


**ROTARY MANUAL TRANSFER SWITCH
CONFIG 1**

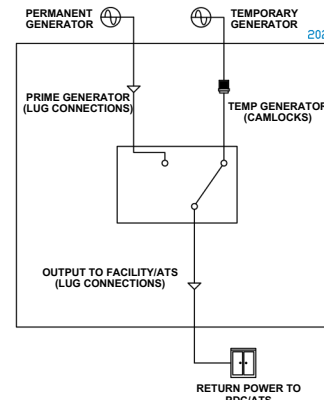

**ROTARY MANUAL TRANSFER SWITCH
CONFIG 2**

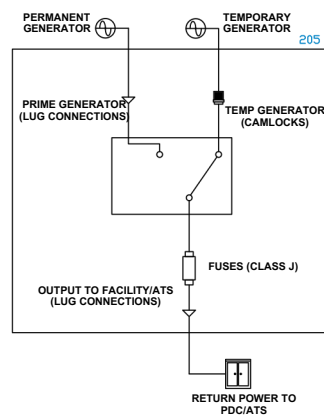

**FUSED ROTARY MANUAL
TRANSFER SWITCH**

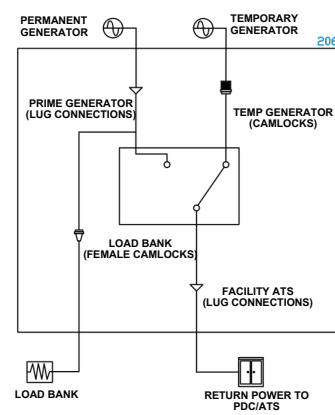

**ROTARY MANUAL TRANSFER SWITCH
DUAL PURPOSE - LOAD BANK TESTING
AND BACK-UP POWER SUPPLY**


Rev 3.3

Connection Cabinets


FFCC-C2 Series




One-Line Diagram (Continue)

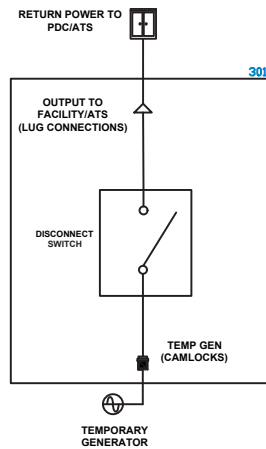


**ROTARY DISCONNECT SWITCH
TEMPORARY GENERATOR
CONFIGURATION**

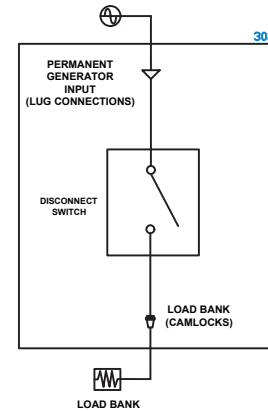

**ROTARY DISCONNECT SWITCH
LOAD BANK
CONFIGURATION**

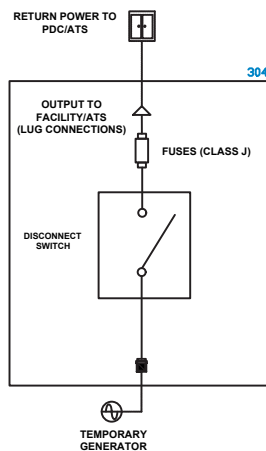

**ROTARY FUSED DISCONNECT SWITCH
TEMPORARY GENERATOR
CONFIGURATION**

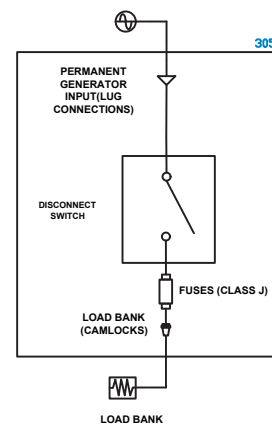

**ROTARY FUSED DISCONNECT SWITCH
LOAD BANK
CONFIGURATION**


Rev 3.3

Connection Cabinets

FFCC-C2 Series



Product Selector

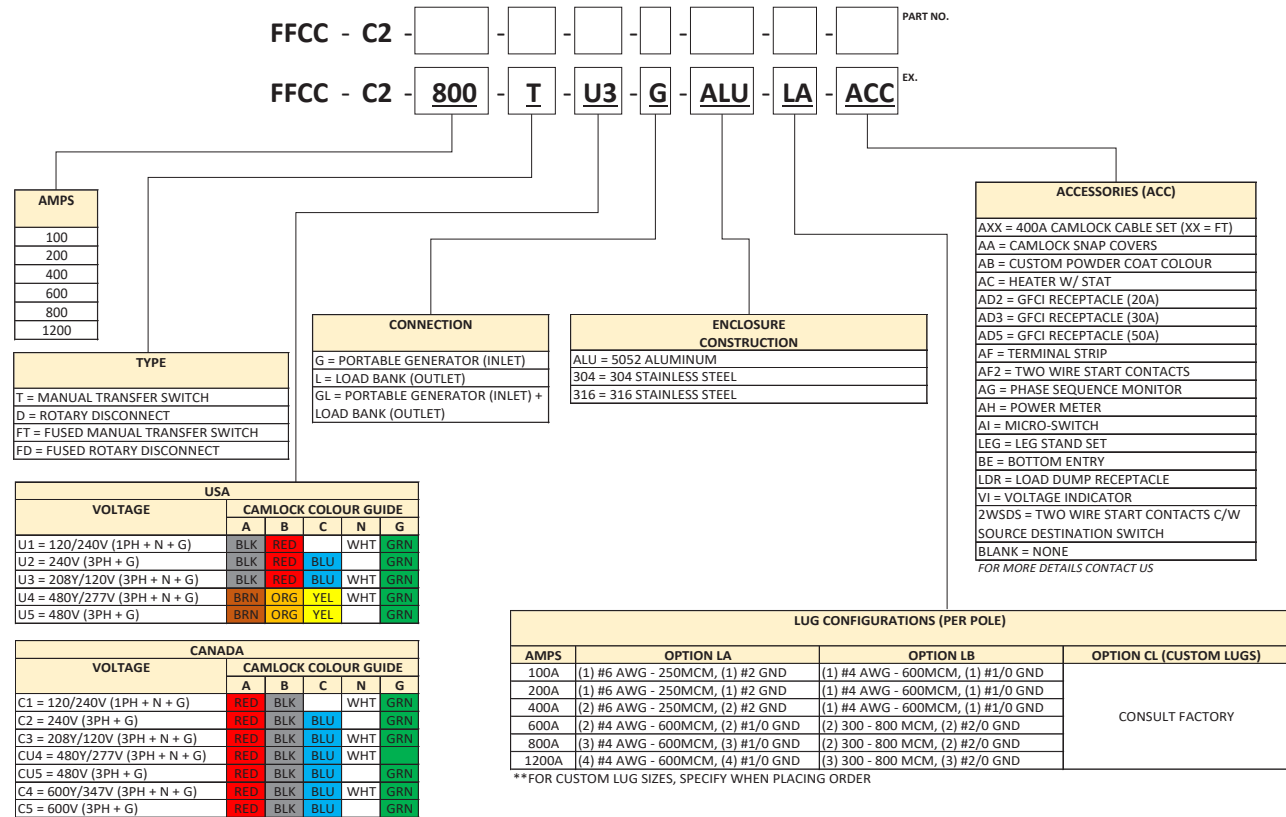

Max Ratings

- 1200A
- 600VAC

Dimensions & Est. Weights

MTS / DISCONNECT (G/L)		MTS / DISCONNECT (G&L) - DUAL PURPOSE	
36"H x 30"W x 16"D (100A - 200A)	100lb	42"H x 30"W x 16"D (200A)	TBD
42"H x 30"W x 16"D (200A - 400A)	210LB	60"H x 36"W x 24"D (600A)	TBD
60"H x 36"W x 24"D (600A - 1200A)	530LB	72"H x 36"W x 30"D (800A)	520LB
		78"H x 45"W x 38"D (1200A)	TBD
FUSED MTS (G/L)		FUSED MTS / DISCONNECT (G&L) - DUAL PURPOSE	
36"H x 30"W x 16"D (100A)	100LB	42"H x 30"W x 16"D (100A)	200LB
42"H x 30"W x 16"D (260A)	210LB	60"H x 36"W x 24"D (600A)	630LB
60"H x 36"W x 24"D (400A - 800A)	530LB	72"H x 36"W x 30"D (800A)	TBD
72"H x 36"W x 30"D (1000A - 1200A)	710LB	78"H x 45"W x 38"D (1200A)	TBD
FUSED DISCONNECT (G/L)		Bottom Entry - Consult factory for sizing	
36"H x 30"W x 16"D (100A)	100LB		
42"H x 30"W x 16"D (400A)	210LB		
60"H x 36"W x 24"D (1000A - 1200A)	530LB		

Rev 3.3

Foxfab Power Solutions

#102, 18725 - 25th Ave, Surrey, BC Canada, V3Z 2A1

Toll Free: (877) 468-0305

Email: Quotes@foxfab.com