



Mini Tuff Tank - low profile waste/water tank



725 litre waste or water tank for space-restricted sites

The Mini Tuff Tank is a low-profile, above-ground plastic holding tank primarily designed for the temporary storage of wastewater, sewage, effluent, and grey water from toilets, showers, and sinks in off-grid environments. May also be used for non-potable water or rainwater storage.

Ideal for construction sites, campsites, glamping sites, welfare units, and outdoor events, the Mini Tuff Tank provides a practical solution where access to a mains sewer connection is unavailable.

Manufactured in the UK from durable polyethylene this lightweight, 725 litre (160 gallons), 400mm tall tank is designed for sites where space may be limited.

Once full of waste, the tank contents are removed by a licensed liquid waste management contractor.

Technical Data*

Height:	400mm	Width:	1100mm
Length:	1870mm	Dry Weight:	40KGs
Volume:	160 gallons / 725 litres		


*We reserve the right to amend the technical specification to improve the product without prior notification.

Technical Advantages

- Empty weight 40KGs
- Full, wet weight 765KGs
- Tank should not be moved when full
- 2 x 2" BSP ports to attach linking pipework
- Adaptable, rust-free, hygienic
- 2 x 5" ports fitted as standard to waste tanks
- Additional 5" or 8" ports may be added
- Multiple applications for waste and water

Plan View

Long Side View

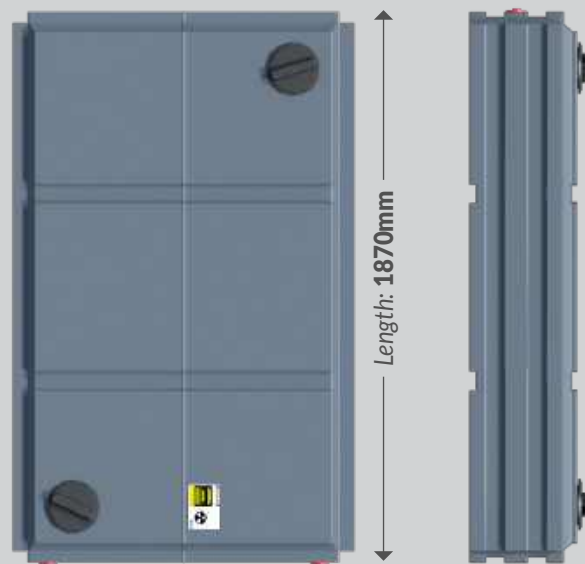

Length: 1870mm

Height: 400mm

Short Side View



Width: 1100mm

2" BSP outlets for linking kit connection

Plan view (above) shows 2 x standard 5" ports at opposite corners on the top surface. Additional 5" or 8" ports can be added.



Mini Tuff Tank - low profile waste/water tank

Applications & product features



Toilet and grey water collection



Chemiloo/Elsan® tipping point waste



Linking kit to expand waste capacity



Water for pressure washer or pump



Water butt for rainwater harvesting



Graphics cannot be removed


OVERVIEW:

- Captures waste from “off grid” toilet units, catering trailers, shower blocks, shepherd’s huts and glamping pods where vertical clearance is low and where access to a mains sewer is not available.
- Accepts toilet and greywater from glamping pods where space is tight.
- Used as an Elsan® tipping point on camping and caravanning sites.
- Used as a slimline, vertical water butt with a suitable rainwater diverter kit in garden situations. When used as a water butt the tank will not be fitted with 5” or 8” ports.
- Used as additional water storage on portable toilet servicing vehicles - connected to a water pump.
- Up to 3 units ship on a 4’ wide x 4’ deep x 6’2” tall pallet (120 KGs total goods weight).



Mini Tuff Tank - low profile waste/water tank

- The Mini Tuff Tank is pre-configured with 2 x 5" waste ports as standard: one for waste inlet, one for waste extraction.
- Additional 5" or 8" ports can be added to the top surface of the tank.
- **For customisation requests, please print out this page, mark where you'd like additional lids and email it to us.**
- If you are drilling the tank **please avoid the ribbed areas marked below.**

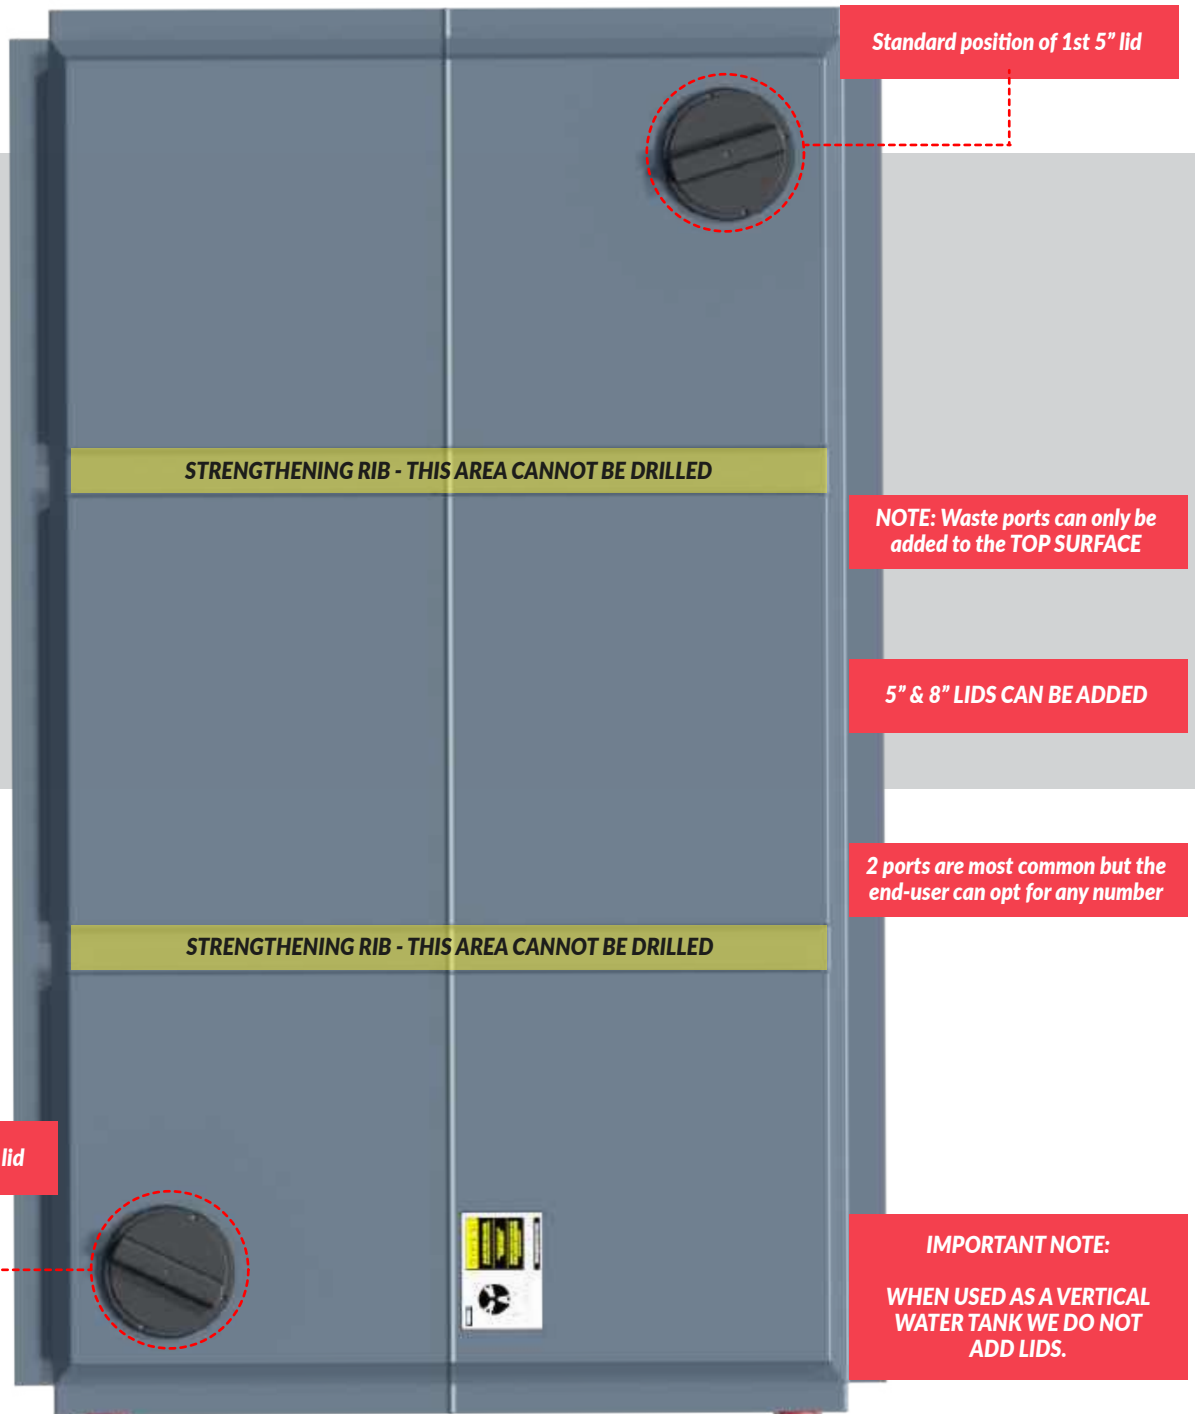



Mini Tuff Tank - low profile waste/water tank

Technical Details*

Detail	TT-500	TT-750	MTT-160
Volume (Litres / Gallons)	2,273 / 500	3,410 / 750	725 / 160
Length (mm)	3,100 mm		1,870 mm
Width (mm)	2,100 mm		1,100 mm
Height (mm) - see Note 1	485 mm	690 mm	400 mm
Dry Weight (KG) - ONLY MOVE, LIFT OR STACK WHEN EMPTY	140 KG	180 KG	40 KG
Wet Weight (KG)	2,413 KG	3,590 KG	765 KG
Flush capacity [@ 4 litre cistern flush]	567 flushes	854 flushes	181 flushes
Flush capacity [@ 6 litre cistern flush]	378 flushes	569 flushes	120 flushes
Shower capacity [@ 40 litres / shower] - see Note 2	57 showers	85 showers	18 showers
Elsan® Cartridge Empties [@ 12 litre chamber] - see Note 3	189 empties	284 empties	60 empties
Elsan® Cartridge Empties [@ 15 litre chamber]	151 empties	227 empties	48 empties
Elsan® Cartridge Empties [@ 21 litre chamber]	108 empties	162 empties	34 empties
High Level Alarm available	For all tanks		
Alarm (when fitted) notification at	1,929 litres	2,904 litres	543 litres
Linking Kits available	Side-to-side or nose-to-tail - for all tanks		
Standard Colour	Black		Dark Grey
	Further Details:		
Note 1: Please allow clearance above tank for connecting inlet pipework e.g. 110mm	2 x Ø 5" / 125mm hatches with screw cap		Optional
Note 2: Average shower duration is 5 to 8 minutes @ 8 litres flow per minute	2 x Ø 12" / 300mm hatches with screw cap		Not available
Note 3: Each user will create an average of 2½ litres of toilet waste per day	4 x inbuilt lifting handles and sling guides		Not available
	Deep forklift slots		Not available
	Transportable and stackable when empty - flat or long edges		

***Please note:** tank sizes quoted are subject to a +/-3% variation. We reserve the right to amend the technical specification to improve the product without prior notification. Plastic process and material guarantee: 2 years based on UV8. This guarantee excludes damage due to misuse.