

powerlogic
SA (Pty) Ltd
innovative power technologies


MK2 & Gemini: Installation Guide




Step 1
Prepare Work Surface
Create a 95 mm diameter cut-out at least 50 mm from the work-surface edge. Allow 450 mm clearance below the work surface and ensure the power cable can easily reach the power outlet.



Step 2
Remove Locking Collar
Remove the locking collar by turning it anti-clockwise (when viewed from above). Do not connect the unit to power until installation is complete.



Step 3
Position the Unit
Insert the unit into the pre-cut mounting hole, ensuring the cable is positioned correctly. Align the unit according to your desired orientation before securing.

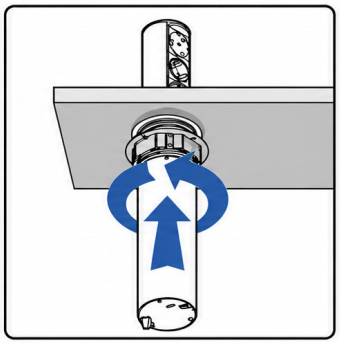

Step 4
Secure the Unit
Attach the locking collar from underneath the work surface. Turn the collar clockwise until firmly tightened. Ensure the unit remains in the desired position while fastening.

Watch the Installation Video
Scan the QR code or click the link below to view the installation guide.

https://m.youtube.com/watch?v=kjde5q9gXiA

Dimensions

Total Height	613 mm (Approx. 24.13 in.)
Max Width	Ø130.5 mm (Approx. 5-1/10 in.)
Mounting Hole	Ø95 mm (Approx. 3-7/10 in.)
Work Surface Thickness	10 mm - 50 mm (Approx. 2/5 in. - 2 in.)

Electrical specifications

Operating Voltage	110 V – 250 V @ 50–60 Hz
Current	15 A
Max Power	3000 W

Warning

- For indoor use only.
- If a malfunction occurs, do not attempt to repair the unit.
- Return the product to the manufacturer for repair.
- Do not insert foreign objects into power outlets or USB ports.
- For work surface mounting only.
- For other options, contact your distributor.


Before Installation


- Ensure the desk thickness is between 10 mm and 50 mm.
- Ensure the power cable can reach a nearby wall outlet.
- Ensure the installation area is clean and unobstructed.


Due to continual product improvements and upgrades, Powerlogic reserves the right to amend and change products without prior notice. Images are for illustrative purposes only and actual products may vary from those shown. Certain options may be unavailable. Please check with your distributor or with Powerlogic regarding product availability.

powerlogic SA (Pty) Ltd
innovative power technologies

MK2 & Gemini: Use Guide

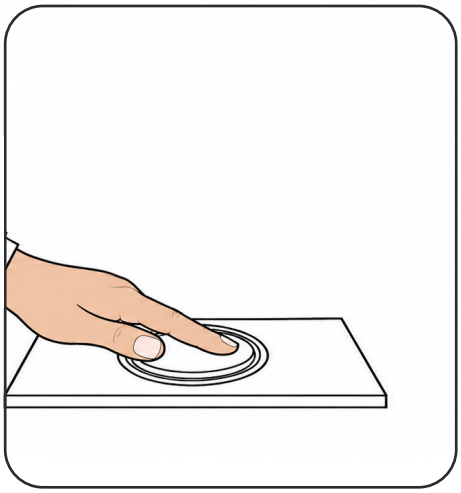

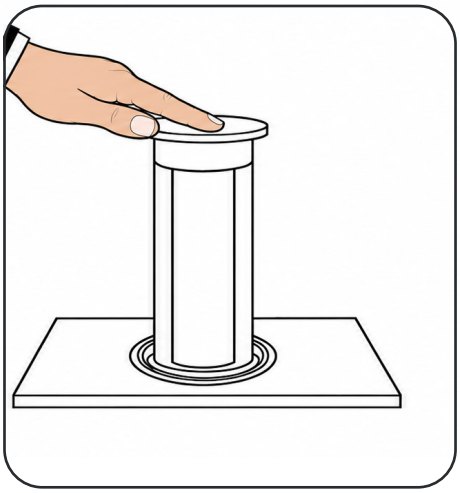

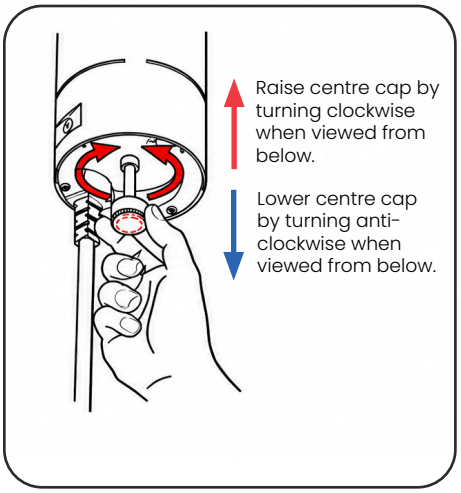

Step 1
Open the unit

1. Briefly press down on the centre of the lid until you hear a click. This indicates that the latch has released.
2. Release the lid.
3. The unit will rise into the open position, ready for use.

Step 2
Close the unit

1. Press down firmly on the centre of the lid to lower the unit.
2. Continue pressing until you hear a click. This indicates that the latch has engaged and locked the unit closed.
3. Release the lid.

Step 3
Adjust the height

1. Use the thumb wheel underneath the unit to raise or lower the centre section.
2. Locate the knurled stainless steel thumb wheel on the underside of the unit.
3. Viewed from below, turn the thumb wheel clockwise to raise the centre section, or anti-clockwise to lower it.

Maintenance and Care

- Disconnect the unit from the power supply before cleaning.
- Clean the unit with a soft, damp cloth and dry immediately.
- Do not use harsh chemical solvents or detergents.
- Do not allow liquids to enter AC sockets or USB ports.
- Regularly check and re-tighten the locking collar if required.
- Not designed for humid or dusty environments.

WARRANTY

MK2 and Gemini products carry a minimum 24-month warranty from the date of manufacture against defects in materials or workmanship. Subject to the warranty conditions, products may be repaired or replaced at the manufacturer's sole discretion.

The warranty excludes misuse, abuse, fair wear and tear, and incidental costs arising from repairs or replacements, including downtime, labour and site access charges.

Due to continual product improvements and upgrades, Powerlogic reserves the right to amend and change products without prior notice. Images are for illustrative purposes only and actual products may vary from those shown. Certain options may be unavailable. Please check with your distributor or with Powerlogic regarding product availability.