



## Elsan® Tipping Point - compact: SKU ELSAN-02



15" wide  
and 11" tall



### Toilet waste tipping... made easy

This purpose built add-on is the ideal solution to allow the easy, spill-free disposal of chemiloo toilet waste into a suitable receiving tank, all from a convenient height. Positioned on the tank inlet, it will be crystal clear to users where they should tip their waste from camp, caravan and boat toilets. **Chemiloo waste control without any fuss.**



### Elsan® Tipping Point on campsite with Tuff Tank 750



### Applications

- Camping / glamping / caravan sites
- Leisure boat marinas
- Catering outlets in remote locations
- Municipal waste tips: waste oil disposal etc.
- Wherever there is no mains sewer connection and where waste needs to be safely tipped away to a waste collection tank with no spills



### Features

- Removable lid for effective sealing between uses
- Conical, moulded chute. No u-bend.
- Complete with uniseal to allow secure fitting to tank
- Convenient height. Rest waste tank on upper rim and tilt to empty: helps avoid splashes and spills.

#### Operation:

Simply remove the lid and tip your chemiloo waste down the chute, The 110mm diameter, straight drop pipework directs the waste into the tank and controls splashing. When done, replace the lid, making a seal.

### Technical Data\*

Height above tank:	<b>280mm / 11"</b>
Outer Diameter:	<b>385mm / 15"</b>
Internal/Chute Diameter:	<b>265mm / 10.5" (tapering to 4")</b>
Total Weight:	<b>3kgs / 6.6 lbs</b>
* Includes U400 uniseal	

\*We reserve the right to amend the technical specification to improve the product without prior notification.



**Contact us for more information.**




## Compact Elsan® Tipping Point - fitting - Tuff Tanks



STOCK CODE / SKU  
ELSAN-02

COMPACT  
TIPPING POINT

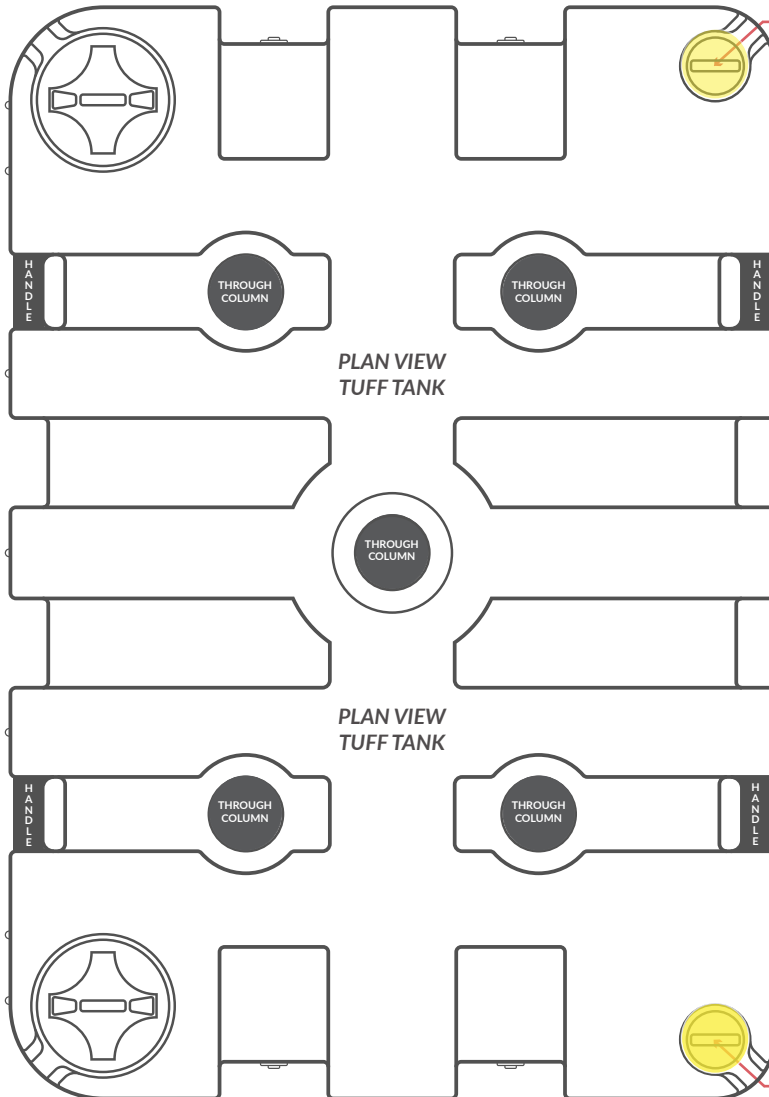

U400 UNISEAL



- The Compact Elsan® Tipping Point is best fitted in place of either of the 5" lid/collars **highlighted yellow above.**
- Remove 5" lid and unscrew the collar from the tank. Fit the supplied uniseal to the exposed hole
- Slide the outlet of the tipping point into the uniseal until the whole assembly is flush with the tank. Alternatively, you may fit the uniseal to the outlet and then slide the whole assembly into the exposed hole.
- Should you choose another position for the tipping point, use a circular holesaw to drill a 5" hole to. You'll use the supplied "Uniseal" to line the drilled hole and make a firm seal between tipping point and waste tank. In this case, only drill the upper tank top: avoid drilling into the recessed, lower ribs as the assembly won't sit firmly.



## Compact Elsan® Tipping Point - pictorial dimensions



SIDE VIEW



INTERIOR VIEW

### TIPPING POINT DIMENSIONS

- Outlet length 95mm / 3.75"
- Outlet OD 110mm / 4.29"
- Outlet ID 102mm / 4.01"
- Overall unit width 385mm / 15"
- Height above tank 280mm / 11"

### UNISEAL DETAILS

- U400
- For pipe OD up to 114mm / 4.50"

