

Extraction Arm Original

The Original arm is the perfect extractor for capturing welding smoke, fumes and non-combustible dust in workshops



Extraction Arm Original














- ✓ A swivel allows the product to rotate 360 degrees
- ✓ Flexible extractor in all directions and simple to position
- ✓ Damper in the hood as standard
- ✓ Thousands of installations worldwide

The Original welding fume extraction arm is the perfect solution for extracting welding smoke, fumes and dust in workshops. Our extractor's patented design ensures optimum fume and dust capturing capacity and maneuverability. The extraction hood has integrated easy-to-reach buttons for lighting and fan control. The extractor is suspended by a swivel, which allows the product to rotate 360 degrees. This makes the extraction arm flexible in all directions and very simple to position. The Original extraction arm can be mounted in combination with different brackets, extension arms, on exhaust rails or on fixed or portable filter equipment. The product is equipped with a damper in the hood as standard. The welding fume extraction arm is available in lengths from 2-5 m (6,6-16 ft), and can be mounted on a ceiling, wall or bench or to an extension bracket. A wide range of accessories give unlimited possibilities to match the needs at any workplace.




Extraction Arm Original

Certifications	CE
Noise level (dB(A))	63-75
Installation	Indoor
Application	Dust, Fumes
Fume temperature	Max 70° Celsius
Extraction arm diameter (mm)	160
Airflow (m ³ /h)	700-1000

Models

	Item no	Arm length (m)	Colour	Weight (kg)
	10554235	2	Blue	11,5
	10554335	3	Blue	13,5
	10554435	4	Blue	14,2
	10554535	4	Blue	15,5
	10554935	5	Blue	15,7
	10230030 ^[1]	2	Blue	24
	10230040 ^[2]	3	Blue	30
	10230050 ^[2]	4	Blue	32
	10230670	4		
	10553535	4	Blue	17
	10558035	2	Grey	11,5
	10558135	3	Grey	13,5
	10558235	4	Grey	14,2














Models

	Item no	Arm length (m)	Colour	Weight (kg)
	10558335	4	Grey	15,5
	10558435	4	Grey	17
	10558535	5	Grey	18



^[1] Incl. N16 fan, 3-phase, 230/400V, wall bracket and manual starter



^[2] Incl. N24 fan, 3-phase, 230/400V, wall bracket and manual starter

Accessories

	Accessory	Item no
	LED 24V, 5W/6VA	10376969
	Wall bracket for extraction arm	10550635
	Wall bracket extension for fume extractor 2m,3m and 4m arm	10550735
	Wall bracket extension for fume extractor 2m,3m & 4m arm	10550835
	LED light/fan switch for Original hood. Including: LED 24V, cable, switch, socket, lens, screws, nuts, cable straps, spring	10376922
	Spark protection for Original hood and for NEX MD hood	10551335
	Transformer 25va. 220-240v. 25va.	10363189
	Transformer 220/24v. 75va.	10361560
	Windscreen adhesive extr. hood.	10372173
	Air flow indicator 500-4500 Pa	10375373
	Air flow indicator 40-600 Pa	10375374
	Spark filter for large metal hood (10321542)	10376329
	Spark filter for round metal hoods, D=249 mm	10373118

Accessories

	Accessory	Item no
	Hood, aluminium, with damper	10321542
	Hood for Original arm	10374308

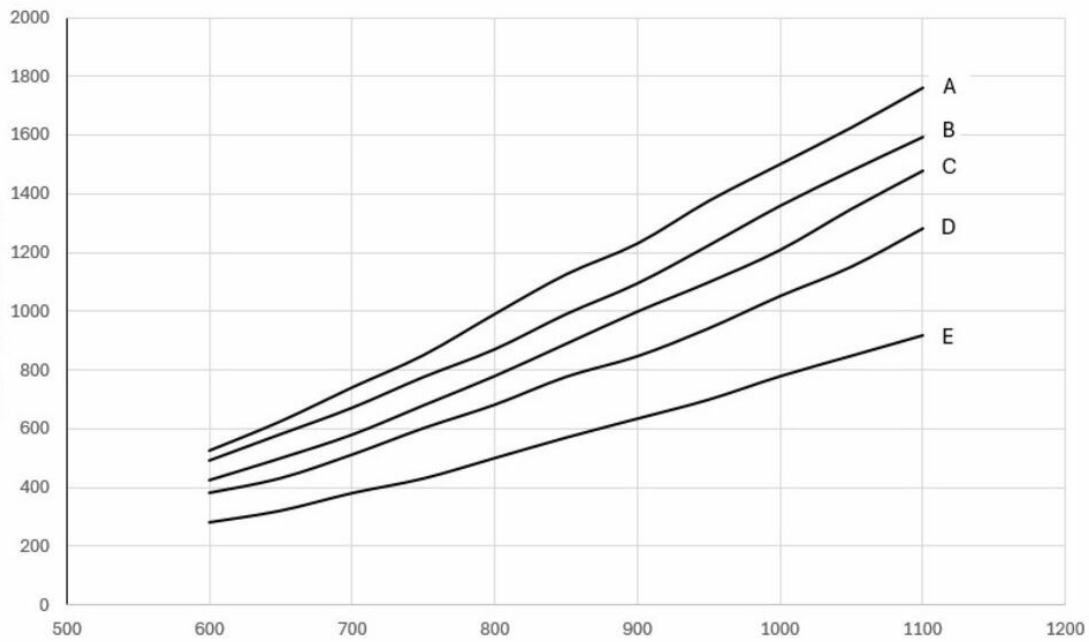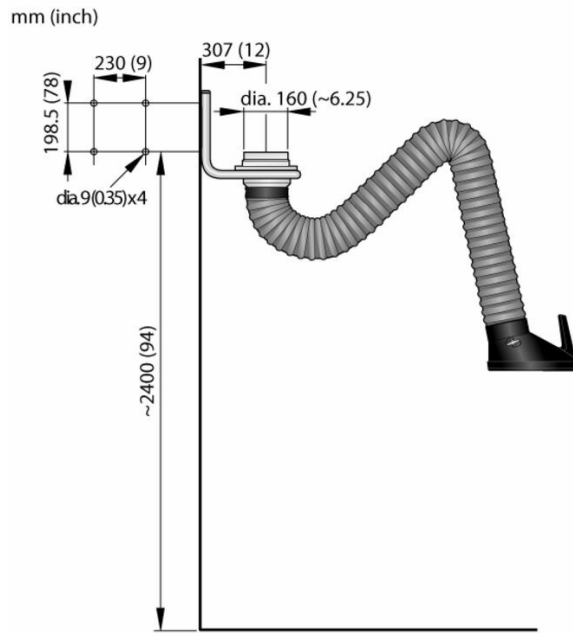

X: Airflow m³/h, Y: Static pressure Pa. A=5m Body work arm. B=4m Horizontal arm. C=4m Vertical arm. D=3m arm. E=2m arm