

Mini-GBIC (SFP)

1.25Gbps, WDM1310~1550, Single Fiber Bi-directional SFP,

ONU Transceiver

- Distance: 0.5km, 2km, 10km, 20km, 40km, 60km, 80km
- Standard Operating Temperature: -10°C ~ 70°C
- Wide Operating Temperature: -40°C ~ 85°C



OVERVIEW

Lantech 1.25Gbps Bi-directional (BiDi) Small Form Factor Pluggable (SFP) transceiver module series is specifically designed for the high performance integrated duplex data link over a single optical fiber. These transceiver modules are compliant with the SFP Multisource Agreement (MSA). With the hot pluggability, these modules offer an easy way to be installed into SFP MSA compliant ports at any time

without the interruption of the host equipments operating online.

Lantech 1.25Gbps BiDi SFP transceiver module series using a long wavelength FP/DFB laser diode and enable data transmission up to 80km on a single-mode (9/125μm) optical fiber. (0.5km on a multi-mode optical fiber)

FEATURES & BENEFITS

- 1.25G bi-directional single-fiber link
- Single LC receptacle
- 1310~1550nm FP/DFB transmitter
- 1310~1550nm PIN receiver
- 0.5km to 80km point-to-point transmission
- Compliant with IEEE802.3ah Standard
- Compliant with SFF8472 diagnostic monitoring interface
- Compliant with SFP MSA
- Hot Pluggable
- RoHS Compliant

SPECIFICATION

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Unit	Note
Storage Temperature	Ts	-40	+85	°C	
Supply Voltage	VccT, VccR	-0.5	4.0	V	
Storage Relative Humidity	RH	5	95	%	

Recommended Operating Conditions (10km, 20km, 40km, 60km, 80km)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Case Operating Temperature	Tc	-10 / -40		70 / 85	°C	1
Supply Voltage	Vcc	3.1	3.3	3.5	V	
Supply Current	Icc		180	280	mA	

Notes: 1. Standard Operating Temperature / Wide Operating Temperature (-E model)

Recommended Operating Conditions (0.5km, 2km)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Case Operating Temperature	Tc	-10 / -40		70 / 85	°C	1
Supply Voltage	Vcc	3.15	3.3	3.45	V	
Supply Current	Icc		180	280	mA	

Notes: 1. Standard Operating Temperature / Wide Operating Temperature (-E model)

Transmitter Electro-Optical Characteristics

Parameter			Symbol	Min.	Typ.	Max.	Unit	Note	
Optical Launch Power	0.5km	WDM1310	Po	-10		0	dBm	1	
		WDM1550		-10		0			
	2km	WDM1310		-11		-3			
		WDM1550		-11		-3			
	10km	WDM1310		-9		-3			
		WDM1550		-9		-3			
	20km	WDM1310		-8		-2			
		WDM1550		-8		-2			
	40km	WDM1310		-3		+2			
		WDM1550		-5		0			
	60km	WDM1310		0		+5			
		WDM1550		-3		+4			
	80km	WDM1490		-2		+4			
		WDM1550		-2		+4			
Optical Extinction Ratio			ER	9 (0.5km: 8.2)			dB		
Center Wavelength	0.5km	WDM1310	λ_c	1270	1310	1355	nm		
		WDM1550		1510	1550	1570			
	2km	WDM1310		1270	1310	1355			
		WDM1550		1510	1550	1570			
	10km	WDM1310		1270	1310	1355			
		WDM1550		1510	1550	1570			
	20km	WDM1310		1270	1310	1355			
		WDM1550		1510	1550	1570			
	40km	WDM1310		1270	1310	1355			
		WDM1550		1510	1550	1570			
	60km	WDM1310		1270	1310	1355			
		WDM1550		1510	1550	1570			
	80km	WDM1490		1480	1490	1500			
		WDM1550		1530	1550	1570			
Spectral Width	0.5km	WDM1310	$\Delta\lambda$			4	nm	RMS	
		WDM1550				4			
	2km	WDM1310				2.5			
		WDM1550				2.5			
	10km	WDM1310				2.5		-20dB	
		WDM1550				1		RMS	
	20km	WDM1310				2.5		-20dB	
		WDM1550				1			
	40km	WDM1310				1			
		WDM1550				1			
	60km	WDM1310				1			
		WDM1550				1			
	80km	WDM1490				1			
		WDM1550				1			
Optical Rise / Fall Timet			tr / tf			260	ps		
Relative Intensity Noise			RIN			-120	dB/Hz		
Total Contributed Jitter			TJ			227	ps		
Optical Eye Mask				IEEE802.3z					
Differential Data Input Noise			V _{DIFF}	400		2000	mV		

Transmit Disable Voltage	V _{dis}	2.0		V _{cc}	V	
Transmit Enable Voltage	V _{en}	GND		GND+0.8	V	

Notes: 1. The optical power is launched into a 9/125μm single-mode fiber. (2km, 10km, 20km, 40km, 60km, 80km)

The optical power is launched into a 62.5/125μm multi-mode fiber. (Center Wavelength 1310nm, 0.5km)

The optical power is launched into a 62.5/125μm single-mode fiber. (Center Wavelength 1550nm, 0.5km)

Receiver Electro-Optical Characteristics

Parameter			Symbol	Min.	Typ.	Max.	Unit	Note				
Maximum Input Power			PINMAX	-3				1				
Receiver Sensitivity	0.5km	WDM1310	PINMIN			-20	dBm	1				
		WDM1550										
	2km	WDM1310										
		WDM1550										
	10km	WDM1310										
		WDM1550										
	20km	WDM1310										
		WDM1550										
	40km	WDM1310										
		WDM1550										
60km	WDM1310											
	WDM1550											
80km	WDM1490											
	WDM1550											
Operating Center Wavelength	0.5km	WDM1310	λc	1470		1600	nm					
		WDM1550		1250		1380						
	2km	WDM1310		1470		1600						
		WDM1550		1250		1380						
	10km	WDM1310		1470		1600						
		WDM1550		1250		1380						
	20km	WDM1310		1470		1600						
		WDM1550		1250		1380						
	40km	WDM1310		1470		1600						
		WDM1550		1250		1380						
	60km	WDM1310		1470		1600						
		WDM1550		1250		1380						
	80km	WDM1490		1530	1550	1570						
		WDM1550		1470	1490	1510						
	Optical Return Loss			ORL	12					dB		
	LOS De-Assert	0.5km		WDM1310	LOS _D					-21	dBm	
WDM1550			-20									
2km		WDM1310	-20									
		WDM1550	-23									
10km		WDM1310	-23									
		WDM1550	-23									
20km		WDM1310	-23									
		WDM1550	-24									
40km		WDM1310	-24									
		WDM1550	-25									
60km	WDM1310	-25										
	WDM1550	-25										
LOS Assert			LOS _A	-35			dBm					
LOS Hysteresis			LOS _{HV}	0.5			dB					
Differential Data Output Voltage			Vout, pp	500		1200	mV					
Data Output Rise/Fall Time (20%~80%)			Tr/Tf			0.35	ns					
Receiver LOS Signal Output Voltage-Low			LOS _{V_L}	GND		GND+0.5	V					
Receiver LOS Signal Output Voltage-High			LOS _{V_H}	2.4		Vcc	V					

Notes: 1. Measured with a PRBS 2⁷-1 test pattern @ 1.25Gbps BER < 10⁻¹²

Pin Assignment

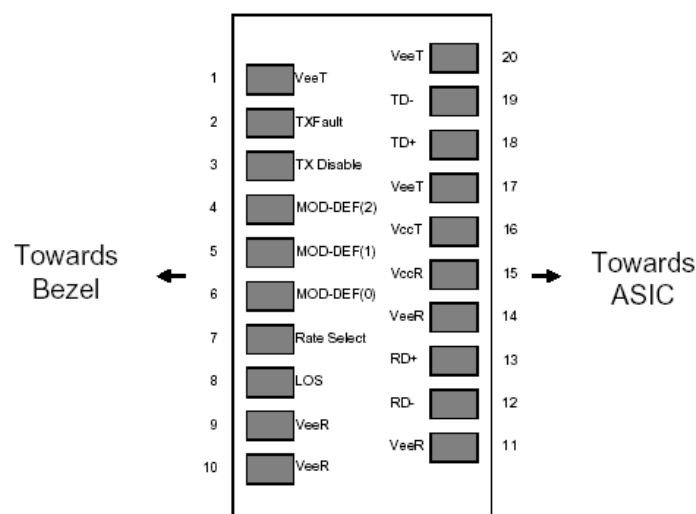


Diagram of Host Board Connector Block Pin Numbers and Name

Pin Description

Pin	Name	Function / Description
1	VeeT	Transmitter Ground
2	TX_Fault	Transmitter Fault Indication (1)
3	TX_Disable	Transmission Disable – Module disables on high or open (2)
4	MOD-DEF(2)	Module Definition 2 – SDA: Serial Data Signal
5	MOD-DEF(1)	Module Definition 1 – SCL: Serial Clock Signal
6	MOD-DEF(0)	Module Definition 0 – LVTTTL Low (3)
7	Rate Select	Not Connected – Open Circuit
8	LOS	Receiver Loss of Signal (4)
9	VeeR	Receiver Ground
10	VeeR	Receiver Ground
11	VeeR	Receiver Ground
12	RD-	Inverse Received Data out, Differential LVPECL, AC coupled
13	RD+	Received Data out, Differential LVPECL, AC coupled
14	VeeR	Receiver Ground
15	VccR	Receiver Power
16	VccT	Transmitter Power
17	VeeT	Transmitter Ground
18	TD+	Transmitter Data In, Differential LVPECL, AC coupled
19	TD-	Inverse Transmitter Data In, Differential LVPECL, AC coupled
20	VeeT	Transmitter Ground

Note1: TX Fault is open collector/drain output which should be pulled up externally with a 4.7K~ 10KΩ resistor on the host board to supply <VccT+0.3V or VccR+0.3V. When high, this output indicates a laser fault of some kind. Low indicates normal operation. In the low state, the output will be pulled to <0.8V.

Note2: TX Disable input is used to shut down the laser output per the state table below. It is pulled up within the module with a 4.7K~10KΩ resistor.

1)Low(0~0.8V): Transmitter on; 2)Between(0.8V and 2V): Undefined; 3)High (2.0~ VccT): Transmitter Disabled; 4)Open: Transmitter Disabled

Note3: Mod-DEF 0, 1, 2. These are the module definition pins. They should be pulled up with a 4.7K~10KΩ resistor on the host board to supply less than VccT+0.3V or VccR+0.3V. Mod-DEF(0) is grounded by the module to indicate that the module is present. Mod-DEF(1) is clock line of two wire serial interface for optional serial ID. Mod-DEF(2) is data line of two wire serial interface for optional serial ID.

Note4: LOS (Loss of signal) is an open collector/drain output which should be pulled up externally with a 4.7K~10KΩ resistor on the host board to supply <VccT+0.3V or VccR+0.3V. When high, this output indicates the received optical power is below the worst case receiver sensitivity (as defined by the standard in use). Low indicates normal operation. In the low state, the output will be pulled to <0.8V.

Digital Diagnostic Functions

As defined by the SFP MSA (SFF-8472) Lantech's SFP transceivers provide digital diagnostic functions via a 2-wire serial interface, which allows real-time access to the following operating parameters:


- Transceiver temperature
- Laser bias current
- Transmitted optical power
- Received optical power
- Transceiver supply voltage

It also provides a sophisticated system of alarm and warning flags, which may be used to alert end-users when particular operating parameters are outside of a factory-set normal range.

The operating and diagnostics information is monitored and reported by a Digital Diagnostics Controller (DDC) inside the transceiver, which is accessed through the 2-wire serial interface. When the serial protocol is activated, the serial clock signal (SCL pin) is generated by the host. The positive edge clocks data into the SFP transceiver into those segments of its memory map that are not write-protected. The negative edge clocks data from the SFP transceiver. The serial data signal (SDA pin) is bi-directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially.

For more detailed information including memory map definitions, please see the SFP MSA (SFF-8472) Specification.


Digital Diagnostic Memory Map

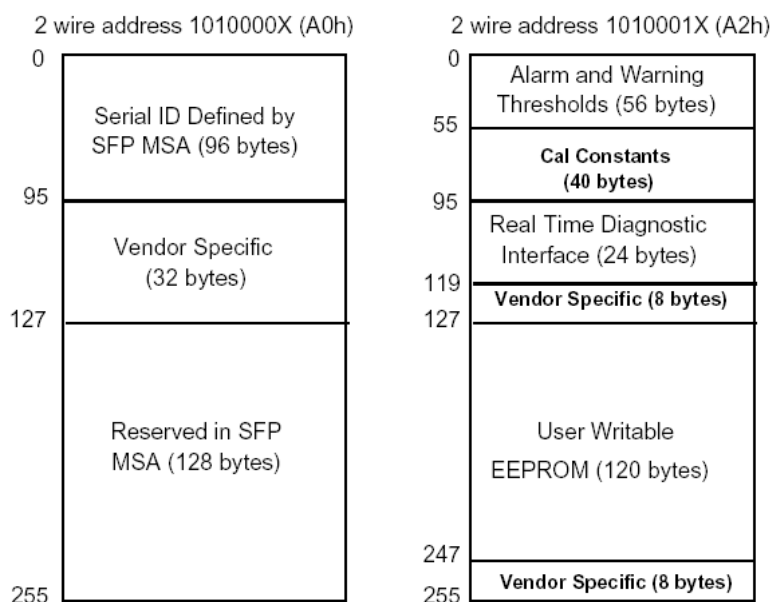

Digital Diagnostic Monitoring Characteristics

Parameter	Accuracy	Unit	Note
Temperature	±3	°C	
Supply Voltage	±0.1	V	
TX Bias Current	±5	mA	
TX Output Power	±3	dB	
RX Received Optical Power	±3	dB	

DIMENSIONS (unit=mm)

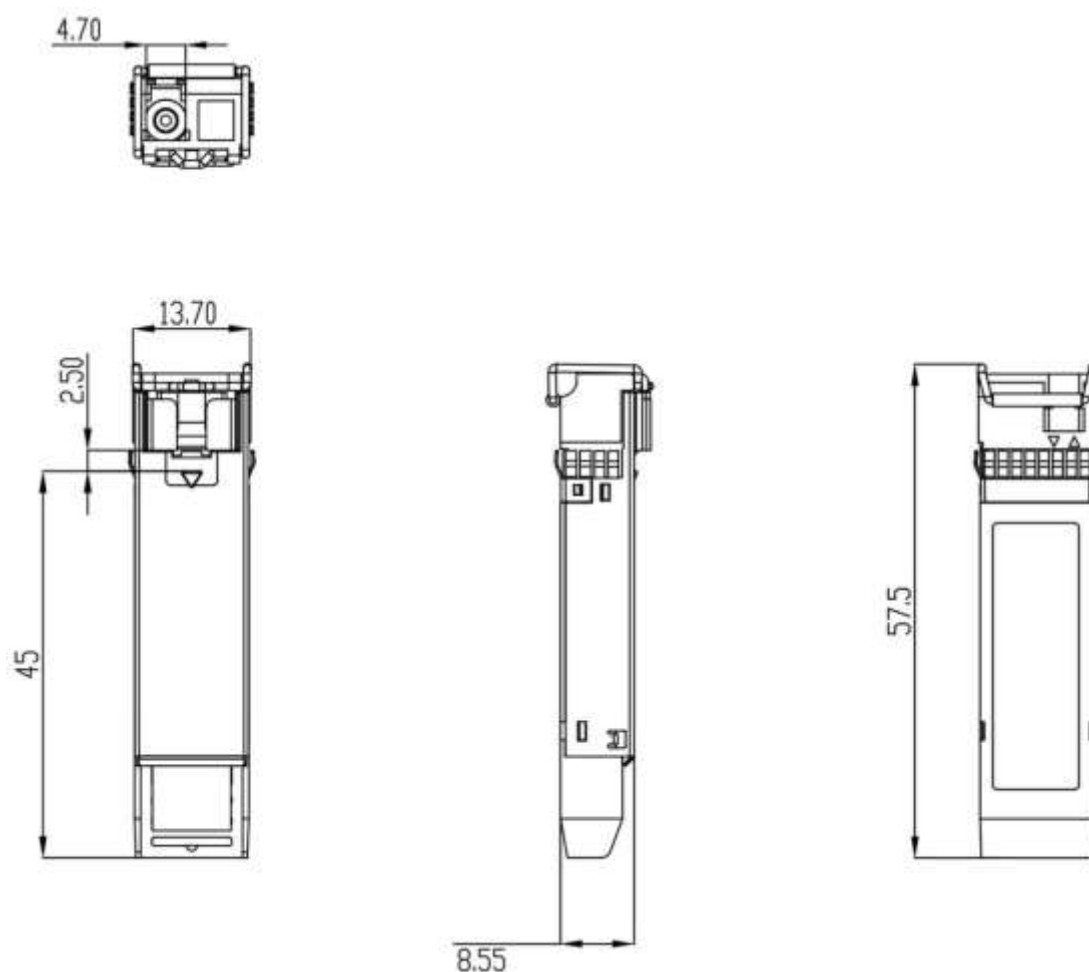

*All dimensions are ±0.2mm unless otherwise specified

ORDERING INFORMATION

All SFP ended with D are with Diagnostic function

Part Number	TX	LD	RX	IO	LOS	Link	Mode	Temp.
8330-197D-V1	1310nm	FP	1550nm	AC/AC	TTL	0.5km	Multi-mode	-10~70°C
8330-195D-V1		FP				2km	Single-mode	
8330-188D-V1		FP				10km	Single-mode	
8330-186D-V1		FP				20km	Single-mode	
8330-180D-V1		DFB				40km	Single-mode	
8330-181D-V1		DFB				60km	Single-mode	
8330-184D-V1	1490nm	DFB				80km	Single-mode	

Part Number	TX	LD	RX	IO	LOS	Link	Mode	Temp.
8330-197DE-V1	1310nm	FP	1550nm	AC/AC	TTL	0.5km	Multi-mode	-40~85°C
8330-195DE-V1		FP				2km	Single-mode	
8330-188DE-V1		FP				10km	Single-mode	
8330-186DE-V1		FP				20km	Single-mode	
8330-180DE-V1		DFB				40km	Single-mode	
8330-181DE-V1		DFB				60km	Single-mode	
8330-184DE-V1	1490nm	DFB				80km	Single-mode	

Part Number	TX	LD	RX	IO	LOS	Link	Mode	Temp.
8330-198D-V1	1550nm	FP	1310nm	AC/AC	TTL	0.5km	Multi-mode	-10~70°C
8330-196D-V1						2km	Single-mode	
8330-189D-V1		10km				Single-mode		
8330-187D-V1		20km				Single-mode		
8330-182D-V1		40km				Single-mode		
8330-183D-V1		DFB	1490nm			60km	Single-mode	
8330-185D-V1						80km	Single-mode	

Part Number	TX	LD	RX	IO	LOS	Link	Mode	Temp.
8330-198DE-V1	1550nm	FP	1310nm	AC/AC	TTL	0.5km	Multi-mode	-40~85°C
8330-196DE-V1						2km	Single-mode	
8330-189DE-V1		10km				Single-mode		
8330-187DE-V1		20km				Single-mode		
8330-182DE-V1		40km				Single-mode		
8330-183DE-V1		DFB	1490nm			60km	Single-mode	
8330-185DE-V1						80km	Single-mode	

Note: Distances are indicative only. To calculate a more precise link budget based on specific conditions in your application, please refer to the optical characteristics.

Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2022 Copyright Lantech Communications Global Inc. all rights reserved.
The revise authority rights of product specifications belong to Lantech Communications Global Inc.
Lantech may make changes to specification and product descriptions at anytime, without notice.