

# 1 TONNE PAYLOAD Hi-Tip Compact Dumper

#### **Specification**:

Payload: 1000 kg

Gross Engine Power: 22.8 kW (16.8hp) Max Skip Capacity: 345 Litres


#### Features:

- 1.2m wide for restricted access works.
- Raised tip capability to load directly into trucks.
- 4WD for the worst ground conditions.
- Sized to work on confined access locations while maintaining payload size.
- Great stability at full load thanks to a uniform weight distribution. Double rear counterweight
  that works as bumper as well.

## **Specifications**

Performance	
Payload (kg)	1000
Unladen weight (kg)	1300
Skip capacity - Water (Itr)	345
- Struck (Itr)	395
- Heaped (Itr)	505
Engine	Kubota D1105
- Net power - kW (hp)	22.8 (16.8)
- Capacity	1123cc
- Maximum Torque	53 Nm
Tyre Size	11.0/65x12
Drive	Forward/Reverse Permanent 4WD
Max travel speed - mph (kph)	9.3 [15]
Gradeability	387.
Fuel tank capacity	23 Litres
Hydraulic tank capacity	21.2 Litres

## Dimension (mm)

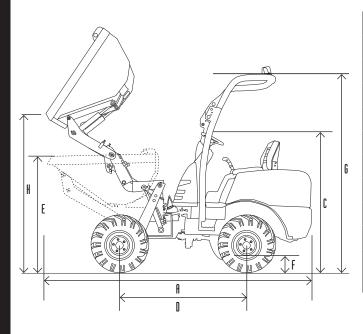

Dimension [mm]		D 100 AHA
A	Total length	3142
В	Total width (not shown)	1180
C	Height to top of steering wheel	1635
0	Wheelbase	1500
E	Height to front lip of skip (untipped)	1230
F	Ground clearance	550
G	Height to top of ROPS (raised)	2605
Н	Height to front lip of skip (raised/unraised)	935/1635
	Turning radius to outside of skip	3060mm
	Tipping type	Forward/ Raised

## Other sizes available

Sizes from left to right: 1000kg, 3000 kg, 6000 kg and 9000 kg (not shown)

