



# Strata Surface Mount, Large



## Technical Specifications

Materials	Glass, Brass-plated steel
Product weight	55 lbs
Lead time	12 weeks
Integrated LED	15,120 lm / 2700K / 170W / 92+ CRI
Input Voltage	120 V, 240 V or 277 V
Dimmer	TRIAC, ELV or 0-10 V
Certifications	UL, ETL listed, damp-rated




## Notes

1. This fixture can be installed on a wall or ceiling.
2. Universal canopy mounting is located at the center of the fixture. Additional anchor holes are available for added support.
3. This fixture has handmade elements and may exhibit variability within the same piece. These variations are inherent in the production process and are not to be considered as defects. We do our best to maintain a consistent product while honoring handmade craftsmanship.
4. Dimensions may vary within half an inch.
5. The LED lifetime is 50,000 hours.
6. The driver is included within the fixture.
7. This fixture is designed so the LED board can be replaced when it reaches its lifetime.


Updated

April 29, 2025


Front View

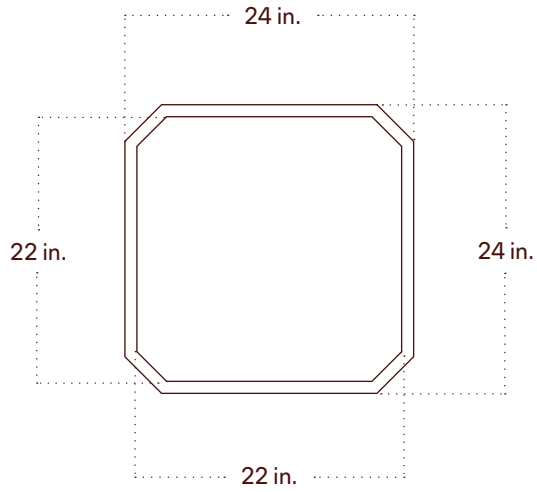


Side View

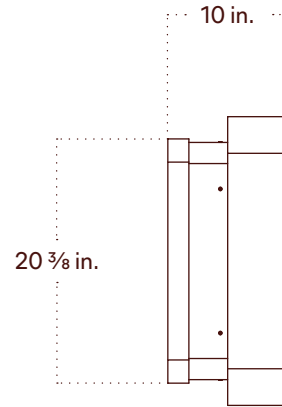

Front View: Ceiling Installation

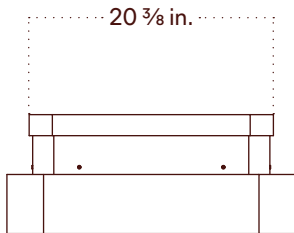

Isometric View

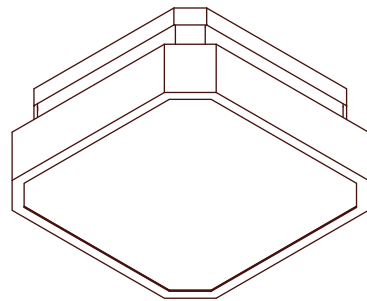

# Strata Surface Mount, Large, Plug-in



## Technical Specifications

Materials	Glass, Brass-plated steel
Product weight	55 lbs
Lead time	12 weeks
Integrated LED	15,120 lm / 2700K / 170W / 92+ CRI
Input Voltage	120 V
Dimmer	Integrated dimmer switch
Certifications	UL, ETL listed




## Notes

1. Universal canopy mounting is located at the center of the fixture. Additional anchor holes are available for added support.
2. This fixture comes with a 16-foot chocolate brown fabric cord. The dimmer switch is our black painted metal finish and is located 8 feet from the plug.
3. This fixture has handmade elements and may exhibit variability within the same piece. These variations are inherent in the production process and are not to be considered as defects. We do our best to maintain a consistent product while honoring handmade craftsmanship.
4. Dimensions may vary within half an inch.
5. The LED lifetime is 50,000 hours.
6. The driver is included within the fixture.
7. This fixture is designed so the LED board can be replaced when it reaches its lifetime.


Updated

April 29, 2025


Front View

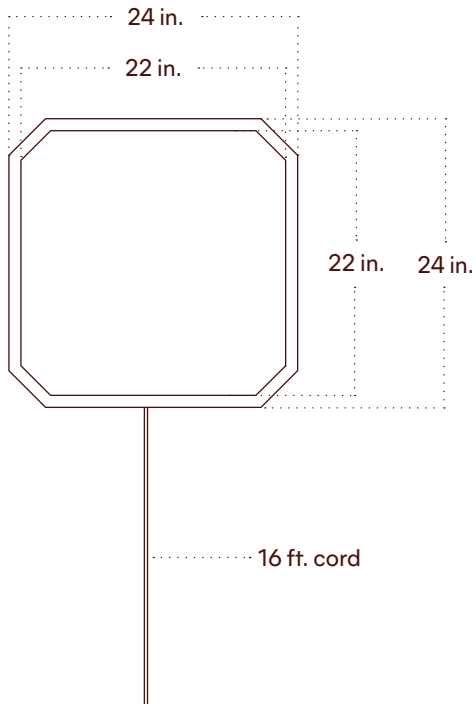


Side View

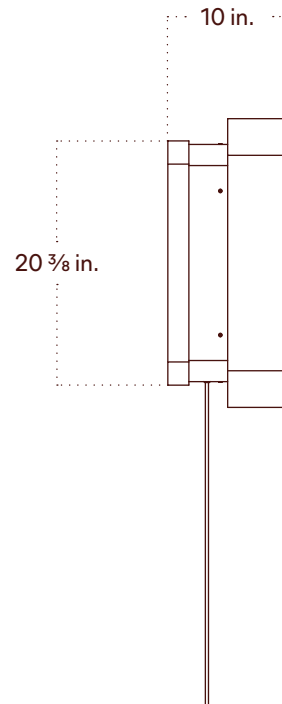


Front View: Ceiling Installation




Inline Dimmer Switch Detail

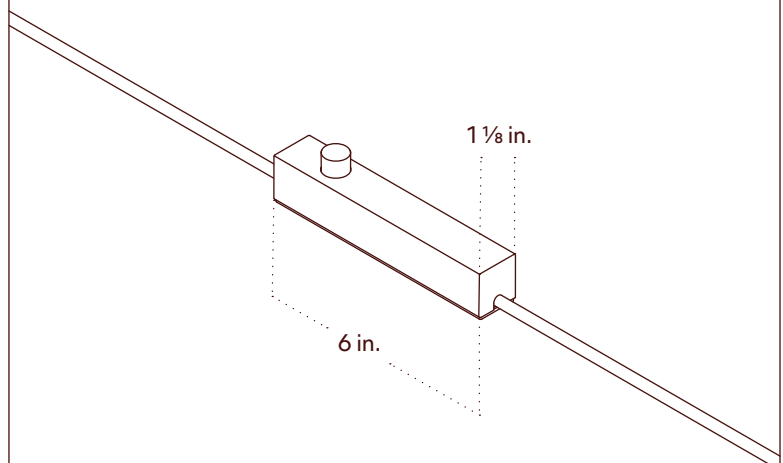


Front View




Powder




Basketweave




Field



Patchwork



Bond




Mosaic

# Finish Options

Brass, glass, and ceramic samples made or finished by hand may exhibit variability. Available for purchase at

---


## Powder Glass



Cirrus



Moss



Umber



Plum

---

## Striped Glass



Vellum



Zinnia



Marigold




Garnet

---


## Patterned Glass



Alba



Algae



Harvest



Canyon

**In Common With**

Strata Surface Mount, Large

# Finish Options

Brass, glass, and ceramic samples made or finished by hand may exhibit variability. Available for purchase at

---


## Brass




Brass



Patina Brass



Blackened Brass



Pewter