

Domes - Mobiles

Dome Diameter	Weight	Power	Light Output
8"	2 lbs / 1 kg	12W	Up to 800 lumens
10"	4 lbs / 2 kg	18W	Up to 1200 lumens
12"	5 lbs / 2 kg	30W	Up to 2100 lumens
14"	8 lbs / 4 kg	35W	Up to 2400 lumens
18"	14 lbs / 6 kg	42W	Up to 2900 lumens
22"	20 lbs / 9 kg	49W	Up to 3400 lumens

Finishes	See Porcelain & Metal Finishes .
Mounting	Standard junction box. Sloped ceiling by request.
Light Bulbs	120V or 230V G8 LED Bulbs by Emery Allen. Bulbs are included. Color accuracy 90+ CRI. Choose from 2700K or 3000K light temperature. Compatible with most standard LED dimmers (ELV forward/reverse phase). POWER: 120V or 230V. No transformer required.
Light Output	See Dome Light Output guide. Darker porcelain finishes diminish light output. Colored gloss porcelain finishes cast colored light. You may specify a reflector to increase light output and restore color. See Dome Reflector guide.
Production	Handmade in Boulder, Colorado. 10-12 week lead time. Rush by request.
UL Listing	Available by request.
Motion	We build true mobiles that are individually balanced. The domes and arms can undulate up and down but cannot move side to side. Arm angles are locked in order to prevent domes from contacting one another.

ADVANCED CUSTOMIZATIONS



Mounting	Custom canopies including recessed and mud-in are available by request. See Canopy Options .
Dim-To-Warm Light	12V GY6.35 Bulbs by Emery Allen. Color accuracy 90+ CRI. 1800K-2700K CCT light temperature. See details . Light output reduced by up to 35%. POWER: 12V LED transformer required. Choose from the following: - Emery Allen Integrated Driver (installed in j-box) - Remote Driver (installed in attic, basement, or closet) See Domes LED Drivers & Dimmers for driver details.
Premium Light	24V LED Strip by ElementalLED or QTL. Color accuracy 95+ CRI. Light output is equivalent to Standard Light. 50K+ hour lifetime (17+ years at 8 hr/day). Choose from light temperatures 2400K to 5000K. Inquire for premium Dim-To-Warm options (reduced output) LEDs are electrician replaceable at end of life. POWER: 24V LED transformer required. Choose from the following: - SwitchEX+ Driver/Dimmer Wall Unit - Remote Driver (installed in attic, basement, closet) See Domes LED Drivers & Dimmers for driver details
Custom Light	You may optionally specify your own LED strip and driver.

Mobile 9 - Round - 9x8 8'D (96"D)

Minimum Overall Drop Height : 22"




You may specify the number of domes, dome sizes, overall shape (round or linear), dimensions (length and width, or diameter), and overall drop height. Each sculpture is designed to specification.

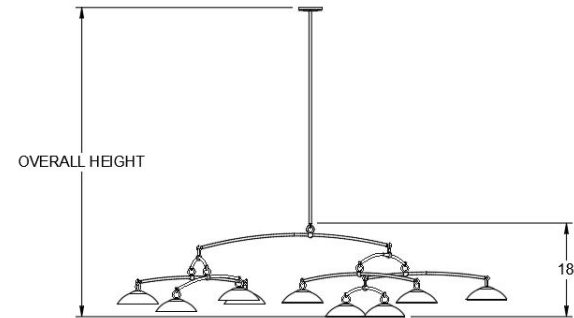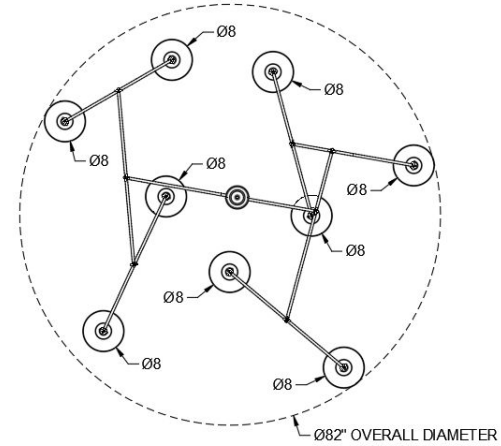


Mobile 9 - Round - 14, 12, 12, 10, 10, 8, 8, 8 8'D (96"D)

AS SHOWN ON WEBSITE

Minimum Overall Drop Height : 24"

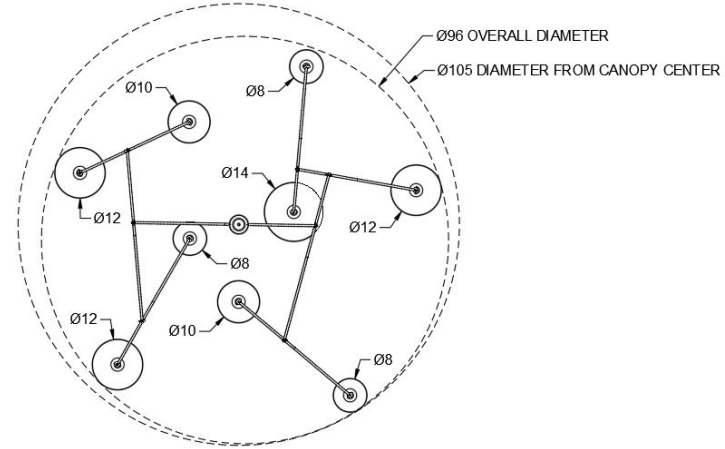


You may specify the number of domes, dome sizes, overall shape (round or linear), dimensions (length and width, or diameter), and overall drop height. Each sculpture is designed to specification.

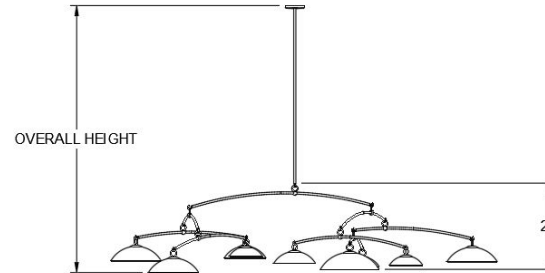


Mobile 9 - Round - 14, 12, 12, 10, 10, 8, 8, 8 10'D (120"D)

Minimum Overall Drop Height : 31"

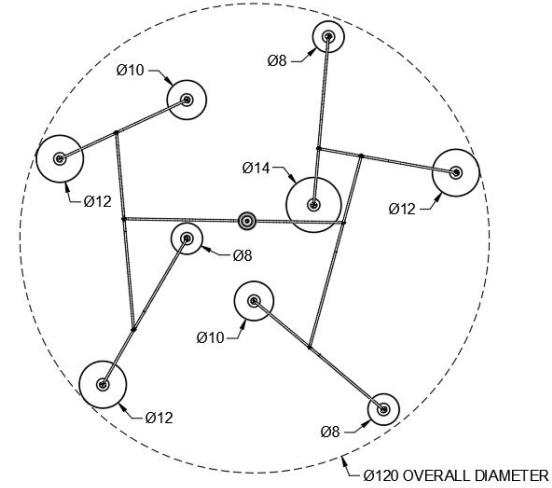


You may specify the number of domes, dome sizes, overall shape (round or linear), dimensions (length and width, or diameter), and overall drop height. Each sculpture is designed to specification.

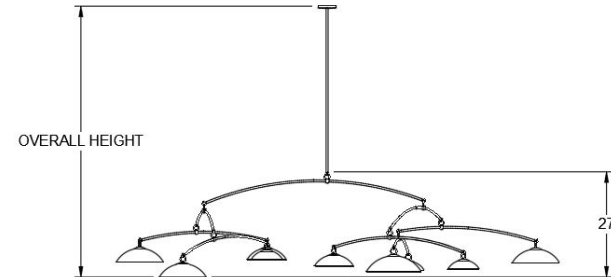


Mobile 9 - Round - 18, 14, 14, 14, 12, 12, 10, 10, 8 10'D (120"D)

Minimum Overall Drop Height : 31"

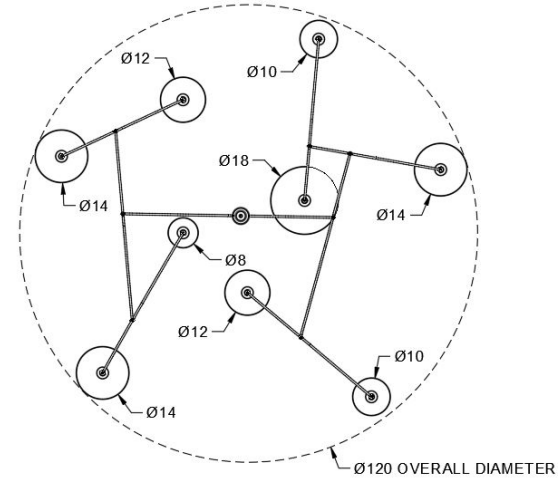


You may specify the number of domes, dome sizes, overall shape (round or linear), dimensions (length and width, or diameter), and overall drop height. Each sculpture is designed to specification.

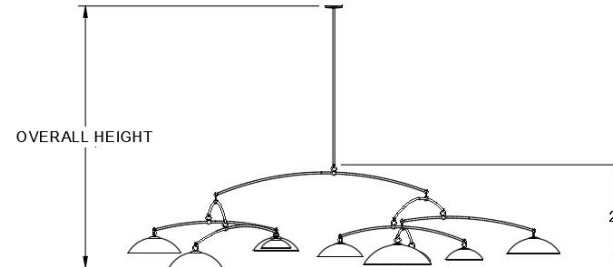

Mobile 9 - Round - 18, 14, 14, 12, 12, 12, 10, 10, 8 12'D (144"D)

Minimum Overall Drop Height : 37"

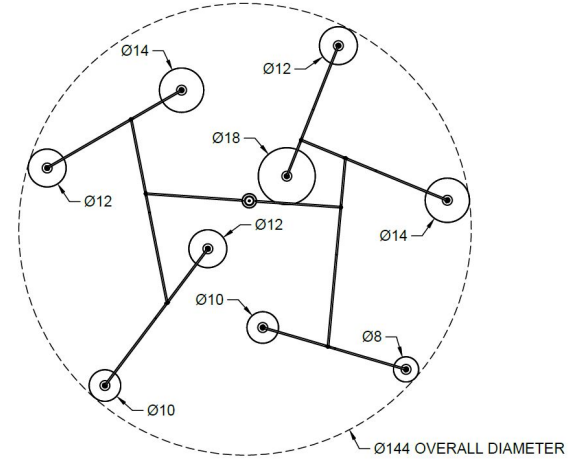

You may specify the number of domes, dome sizes, overall shape (round or linear), dimensions (length and width, or diameter), and overall drop height. Each sculpture is designed to specification.

