

Step-by-step process for Virtual WSMBs

The planner identifies applicable VWSMB worksites and submits to Network Rail

Planning process

The planner and Network Rail checks compliance and include use of VWSMBs in the WON's general remarks

GENERAL REMARKS

Virtual Worksite Marker Boards in use

A VWSMB worksite is created and submitted for approval



On the day

The planner checks that briefings include VWSMB brief materials



The ES prepares devices and assigns them to the project

The ES then checks limits and that the geofence is approved for use

Machine Controllers/ Operators collect and switch on their device and attach them to OTP




The ES starts the worksite on the Dashboard once authority is given by the PICOP

Once works are complete, the ES stops the worksite when authorised by the PICOP

If OTP comes within 100m of the worksite limits, the device alerts and the Dashboard notifies the ES



The ES monitors OTP movements on the Dashboard

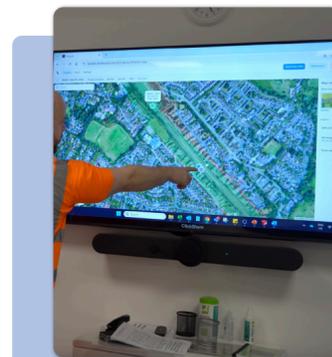

OTP starts work as usual once the ES has ensured the device is attached and allowed access

