

Domes - Uplight Pendants

U.S. Patents Pending.

Dome Diameter	Weight	Power	Light Output
8" / 8"	8 lbs / 4 kg	24W	Up to 1600 lumens
10" / 8"	9 lbs / 4 kg	30W	Up to 2000 lumens
10" / 10"	11 lbs / 5 kg	36W	Up to 2400 lumens
12" / 8"	11 lbs / 5 kg	42W	Up to 2900 lumens
12" / 10"	12 lbs / 5 kg	48W	Up to 3300 lumens
12" / 12"	14 lbs / 6 kg	60W	Up to 4200 lumens
14" / 10"	16 lbs / 7 kg	53W	Up to 3600 lumens
14" / 12"	16 lbs / 7 kg	65W	Up to 4500 lumens
18" / 12"	23 lbs / 10 kg	72W	Up to 5000 lumens
22" / 14"	32 lbs / 15 kg	84W	Up to 5800 lumens

Finishes	See Porcelain & Metal Finishes .
Mounting	Standard junction box. Sloped ceiling by request.
Light Bulbs	120V or 230V G8 LED Bulbs by Emery Allen. Bulbs are included. Color accuracy 90+ CRI. Choose from 2700K or 3000K light temperature. Compatible with most standard LED dimmers (ELV forward/reverse phase). POWER: 120V or 230V. No transformer required.
Light Output	See Dome Light Output guide. Darker porcelain finishes diminish light output. Colored gloss porcelain finishes cast colored light. You may specify a reflector to increase light output and restore color. See Dome Reflector guide.
Production	Handmade in Boulder, Colorado. 10-12 week lead time. Rush by request.
UL Listing	Available by request.

ADVANCED CUSTOMIZATIONS

Mounting	Custom canopies including recessed and mud-in are available by request. See Canopy Options .
Dim-To-Warm Light	12V GY6.35 Bulbs by Emery Allen. Color accuracy 90+ CRI. 1800K-2700K CCT light temperature. See details . Light output reduced by up to 35%. POWER: 12V LED transformer required. Choose from the following: - Emery Allen Integrated Driver (installed in j-box) - Remote Driver (installed in attic, basement, or closet) See Domes LED Drivers & Dimmers for driver details.
Premium Light	24V LED Strip by ElementalLED or QTL. Color accuracy 95+ CRI. Light output is equivalent to Standard Light. 50K+ hour lifetime (17+ years at 8 hr/day). Choose from light temperatures 2400K to 5000K. Inquire for premium Dim-To-Warm options (reduced output) LEDs are electrician replaceable at end of life. POWER: 24V LED transformer required. Choose from the following: - SwitchEX+ Driver/Dimmer Wall Unit - Remote Driver (installed in attic, basement, closet) See Domes LED Drivers & Dimmers for driver details
Custom Light	You may optionally specify your own LED strip and driver.




Uplight Pendants - Set of 3 Linear - Varied

46"L x 16"W

Minimum Overall Drop Height : 23"



You may specify overall shape (round or linear), dimensions (length and width, or diameter), and overall drop height. Each sculpture is designed to specification.

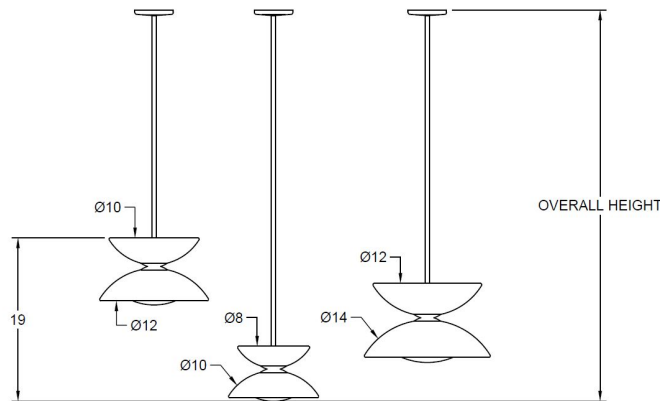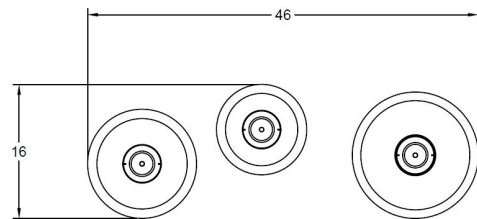

Uplight Pendants - Set of 3 Linear - 12, 8


43"L x 17"W

AS SHOWN ON WEBSITE

Minimum Overall Drop Height : 23"



You may specify overall shape (round or linear), dimensions (length and width, or diameter), and overall drop height. Each sculpture is designed to specification.


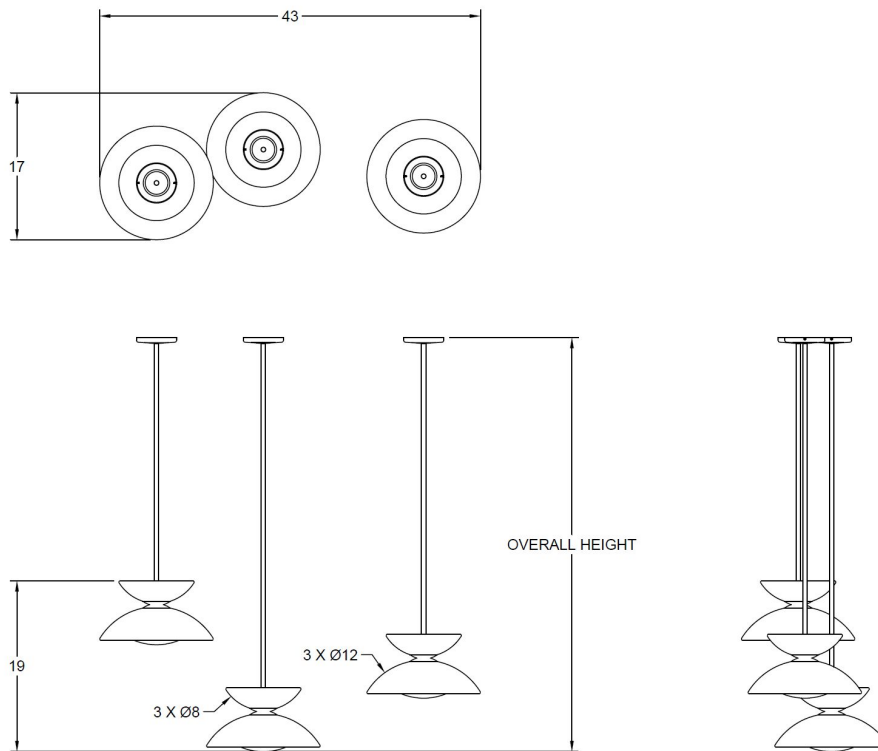


Uplight Pendants - Set of 3 Round - 12, 8 34"D

Minimum Overall Drop Height : 22"



You may specify overall shape (round or linear), dimensions (length and width, or diameter), and overall drop height. Each sculpture is designed to specification.

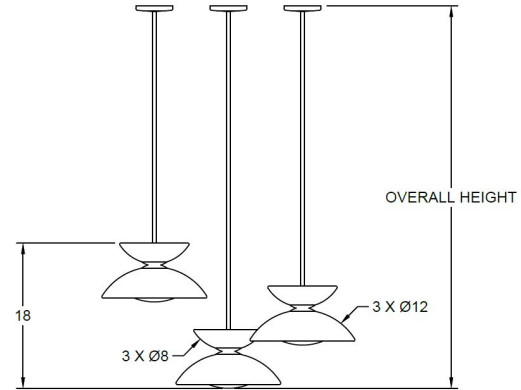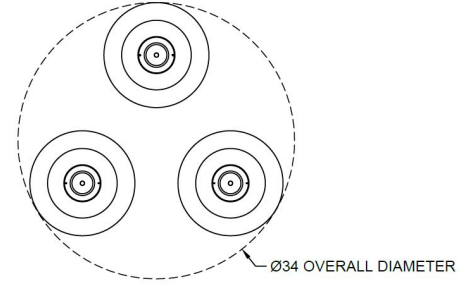


Uplight Pendants - Set of 3 Round - Varied 36"D

AS SHOWN ON WEBSITE

Minimum Overall Drop Height : 23"



You may specify overall shape (round or linear), dimensions (length and width, or diameter), and overall drop height. Each sculpture is designed to specification.

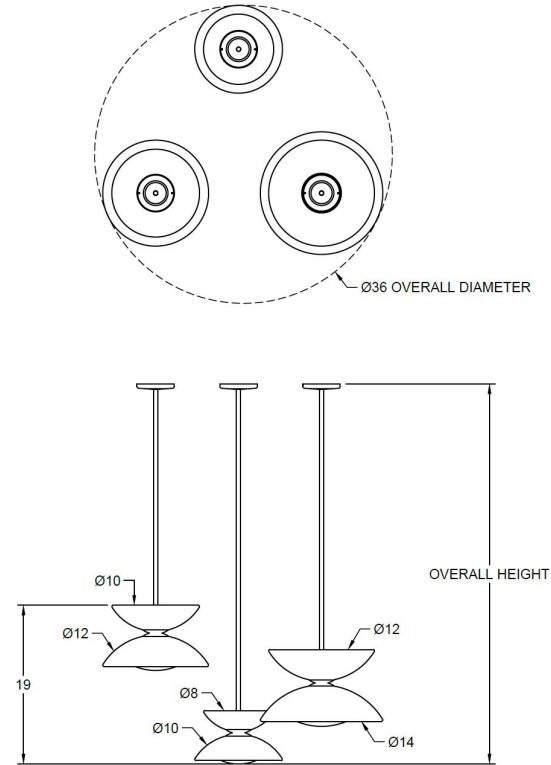

Uplight Pendants - Swag - Set of 3 Round - Varied 34"D

AS SHOWN ON WEBSITE

Minimum Overall Drop Height : 22"



You may specify overall shape (round or linear), dimensions (length and width, or diameter), and overall drop height. Each sculpture is designed to specification.

