

# Domes - Uplight Pendants

U.S. Patents Pending.

| Dome Diameter | Weight         | Power | Light Output      |
|---------------|----------------|-------|-------------------|
| 8" / 8"       | 8 lbs / 4 kg   | 24W   | Up to 1600 lumens |
| 10" / 8"      | 9 lbs / 4 kg   | 30W   | Up to 2000 lumens |
| 10" / 10"     | 11 lbs / 5 kg  | 36W   | Up to 2400 lumens |
| 12" / 8"      | 11 lbs / 5 kg  | 42W   | Up to 2900 lumens |
| 12" / 10"     | 12 lbs / 5 kg  | 48W   | Up to 3300 lumens |
| 12" / 12"     | 14 lbs / 6 kg  | 60W   | Up to 4200 lumens |
| 14" / 10"     | 16 lbs / 7 kg  | 53W   | Up to 3600 lumens |
| 14" / 12"     | 16 lbs / 7 kg  | 65W   | Up to 4500 lumens |
| 18" / 12"     | 23 lbs / 10 kg | 72W   | Up to 5000 lumens |
| 22" / 14"     | 32 lbs / 15 kg | 84W   | Up to 5800 lumens |

|              |                                                                                                                                                                                                                                                                             |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Finishes     | See <a href="#">Porcelain &amp; Metal Finishes</a> .                                                                                                                                                                                                                        |
| Mounting     | Standard junction box. Sloped ceiling by request.                                                                                                                                                                                                                           |
| Light Bulbs  | 120V or 230V G8 LED Bulbs by Emery Allen. Bulbs are included.<br>Color accuracy 90+ CRI.<br>Choose from 2700K or 3000K light temperature.<br>Compatible with most standard LED dimmers (ELV forward/reverse phase).<br><b>POWER:</b> 120V or 230V. No transformer required. |
| Light Output | See <a href="#">Dome Light Output</a> guide. Darker porcelain finishes diminish light output. Colored gloss porcelain finishes cast colored light. You may specify a reflector to increase light output and restore color. See <a href="#">Dome Reflector</a> guide.        |
| Production   | Handmade in Boulder, Colorado. 10-12 week lead time. Rush by request.                                                                                                                                                                                                       |
| UL Listing   | Available by request.                                                                                                                                                                                                                                                       |

## ADVANCED CUSTOMIZATIONS

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mounting          | Custom canopies including recessed and mud-in are available by request. See <a href="#">Canopy Options</a> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Dim-To-Warm Light | 12V GY6.35 Bulbs by Emery Allen.<br>Color accuracy 90+ CRI.<br>1800K-2700K CCT light temperature. <a href="#">See details</a> .<br>Light output reduced by up to 35%.<br><b>POWER:</b> 12V LED transformer required.<br>Choose from the following: <ul style="list-style-type: none"><li>Emery Allen Integrated Driver (installed in j-box)</li><li>Remote Driver (installed in attic, basement, or closet)</li></ul> See <a href="#">Domes LED Drivers &amp; Dimmers</a> for driver details.                                                                                                                                         |
| Premium Light     | 24V LED Strip by ElementalLED or QTL.<br>Color accuracy 95+ CRI.<br>Light output is equivalent to Standard Light.<br>50K+ hour lifetime (17+ years at 8 hr/day).<br>Choose from light temperatures 2400K to 5000K.<br>Inquire for premium Dim-To-Warm options (reduced output)<br>LEDs are electrician replaceable at end of life.<br><b>POWER:</b> 24V LED transformer required.<br>Choose from the following: <ul style="list-style-type: none"><li>SwitchEX+ Driver/Dimmer Wall Unit</li><li>Remote Driver (installed in attic, basement, closet)</li></ul> See <a href="#">Domes LED Drivers &amp; Dimmers</a> for driver details |
| Custom Light      | You may optionally specify your own LED strip and driver.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |



## Uplight Pendants - 8, 8

**AS SHOWN ON WEBSITE**

Minimum Overall Drop Height : 10"



You may specify overall drop height. Each sculpture is designed to specification.

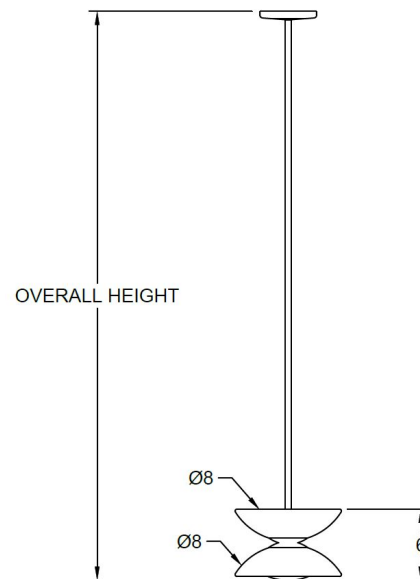


## Uplight Pendants - 10, 8

Minimum Overall Drop Height : 10"



You may specify overall drop height. Each sculpture is designed to specification.

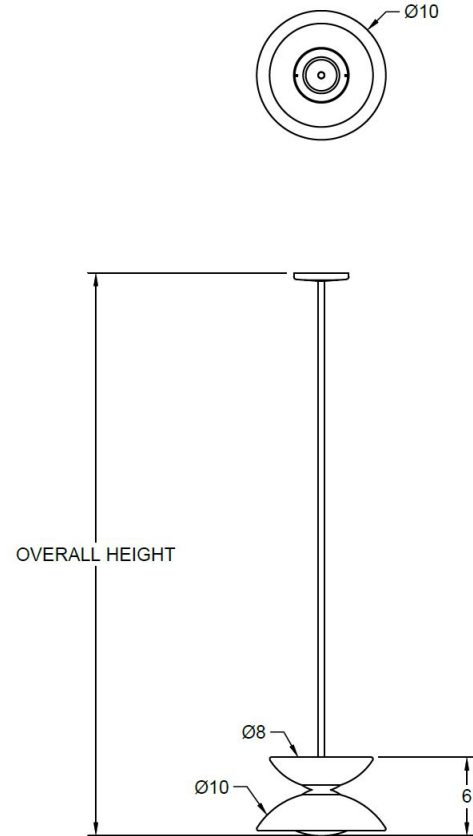


# Uplight Pendants - 10, 10

Minimum Overall Drop Height : 11"



You may specify overall drop height. Each sculpture is designed to specification.

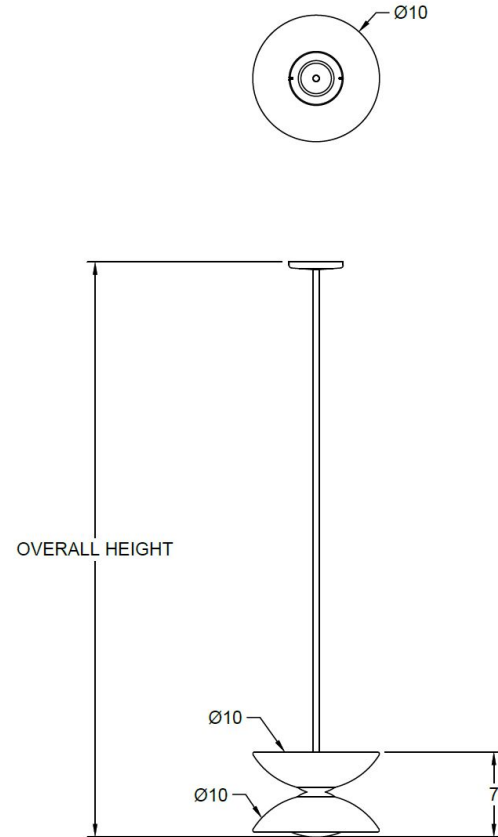



## Uplight Pendants - 12, 8

**AS SHOWN ON WEBSITE**

Minimum Overall Drop Height : 11"



You may specify overall drop height. Each sculpture is designed to specification.

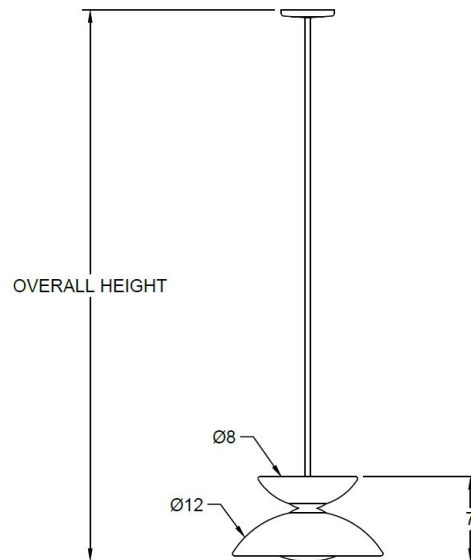



# Uplight Pendants - 12, 10

Minimum Overall Drop Height : 12"



You may specify overall drop height. Each sculpture is designed to specification.

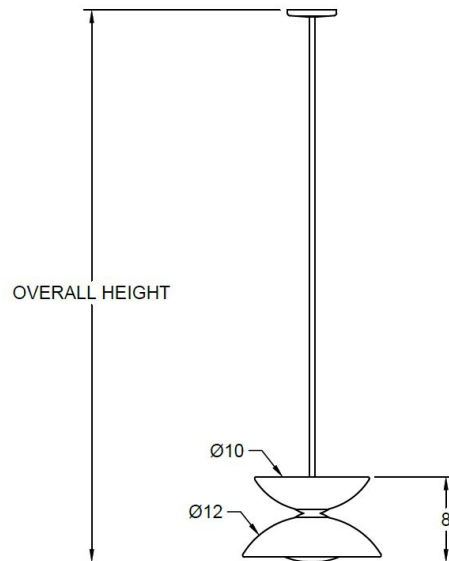


# Uplight Pendants - 12, 12

Minimum Overall Drop Height : 13"



You may specify overall drop height. Each sculpture is designed to specification.

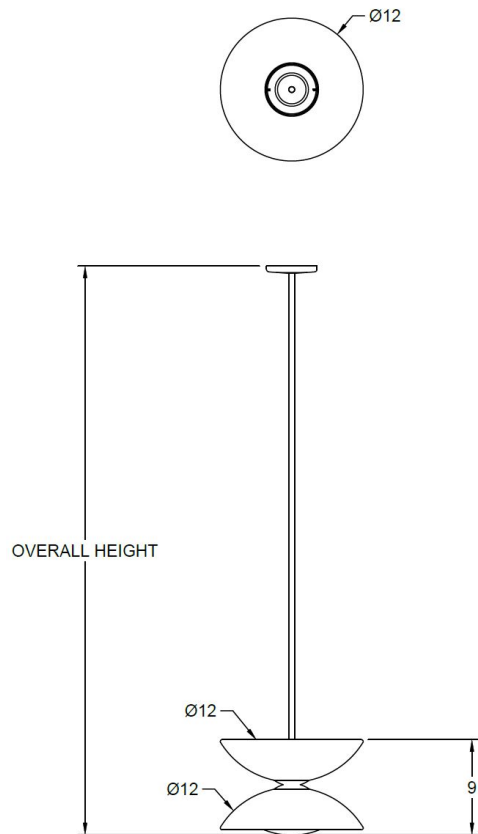


## Uplight Pendants - 14, 10

**AS SHOWN ON WEBSITE**

Minimum Overall Drop Height : 13"



You may specify overall drop height. Each sculpture is designed to specification.

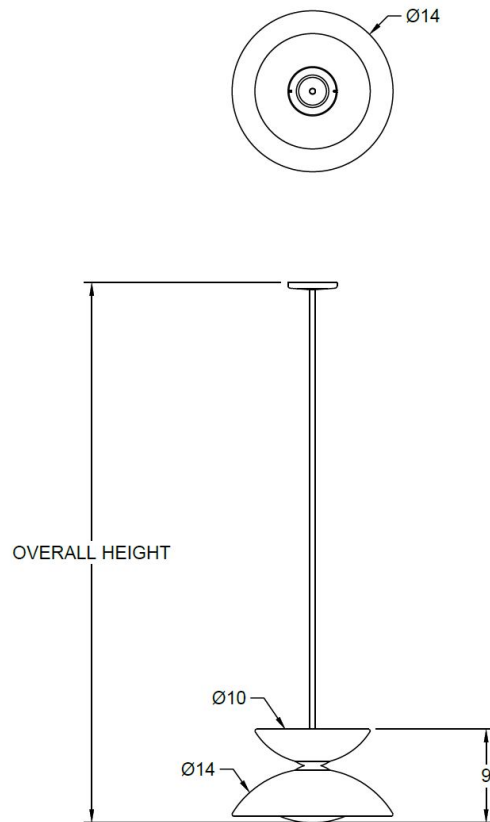





# Uplight Pendants - 14, 12

Minimum Overall Drop Height : 13"



You may specify overall drop height. Each sculpture is designed to specification.

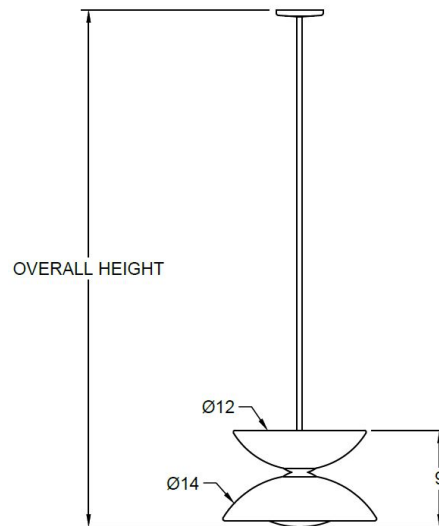



## Uplight Pendants - 18, 12

**AS SHOWN ON WEBSITE**

Minimum Overall Drop Height : 15"



You may specify overall drop height. Each sculpture is designed to specification.

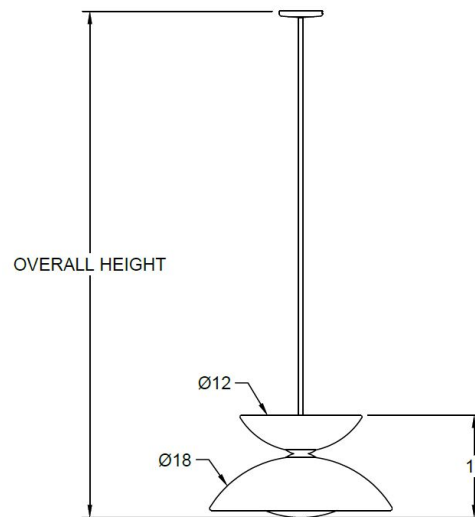

# Uplight Pendants - 22, 14

Minimum Overall Drop Height : 17"



You may specify overall drop height. Each sculpture is designed to specification.

