

Dome Diameter	Weight	Power	Light Output
8"	2 lbs / 1 kg	12W	Up to 800 lumens
10"	4 lbs / 2 kg	18W	Up to 1200 lumens
12"	5 lbs / 2 kg	30W	Up to 2100 lumens
14"	8 lbs / 4 kg	35W	Up to 2400 lumens
18"	14 lbs / 6 kg	42W	Up to 2900 lumens
22"	20 lbs / 9 kg	49W	Up to 3400 lumens

Finishes	See Porcelain & Metal Finishes .
Sets	Flushmounts can be arranged in custom sets to your specification. (Optional) Braided metal electrical cord connects each flushmount, requiring just one junction-box per set. Junction box can be at any flushmount location.
Light Bulbs	120V or 230V G8 LED Bulbs by Emery Allen. Bulbs are included. Color accuracy 90+ CRI. Choose from 2700K or 3000K light temperature. Compatible with most standard LED dimmers (ELV forward/reverse phase). POWER: 120V or 230V. No transformer required.
Light Output	See Dome Light Output guide. Darker porcelain finishes diminish light output. Colored gloss porcelain finishes cast colored light. You may specify a reflector to increase light output and restore color. See Dome Reflector guide.
Production	Handmade in Boulder, Colorado. 10-12 week lead time. Rush by request.
UL Listing	Available by request.

ADVANCED CUSTOMIZATIONS


Backlight Feature	Halo glow effect on ceiling behind flushmount. Requires "Premium Light" option.
Dim-To-Warm Light	12V GY6.35 Bulbs by Emery Allen. Color accuracy 90+ CRI. 1800K-2700K CCT light temperature. See details . Light output reduced by up to 35%. POWER: 12V LED transformer required. Choose from the following: - Emery Allen Integrated Driver (installed in j-box) - Remote Driver (installed in attic, basement, or closet) See Domes LED Drivers & Dimmers for driver details.
Premium Light	24V LED Strip by ElementalLED or QTL. Color accuracy 95+ CRI. Light output is equivalent to Standard Light. 50K+ hour lifetime (17+ years at 8 hr/day). Choose from light temperatures 2400K to 5000K. Inquire for premium Dim-To-Warm options (reduced output) LEDs are electrician replaceable at end of life. POWER: 24V LED transformer required. Choose from the following: - SwitchEX+ Driver/Dimmer Wall Unit - Remote Driver (installed in attic, basement, closet) See Domes LED Drivers & Dimmers for driver details
Custom Light	You may optionally specify your own LED strip and driver.

Domes - Flushmounts - Mounting

U.S. Patents Pending.


No Backlight - Standard

Mounting Standard junction box.
All flushmount types and sizes use the mounting plate shown below.



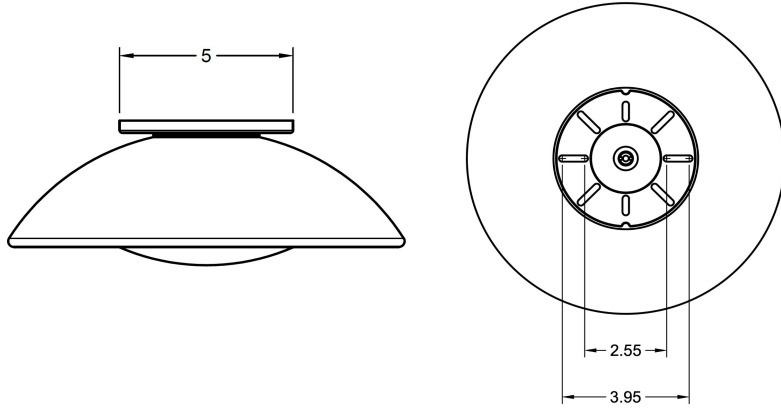


With Backlight - Upgrade




Mounting Standard junction box.

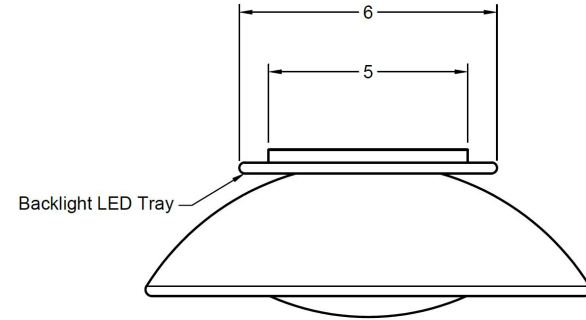




Flushmount - 8-Inch

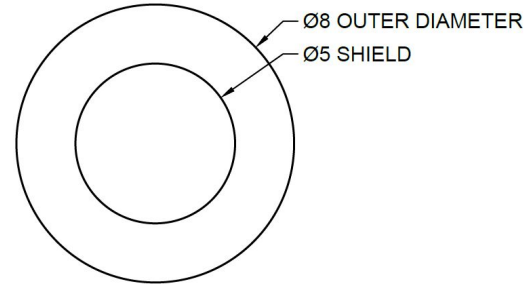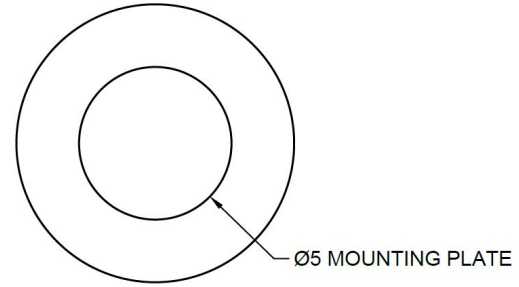




Flushmount - 10-Inch

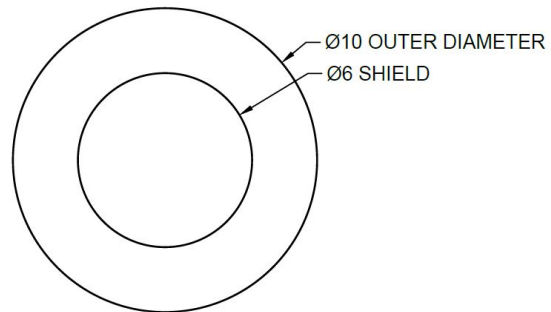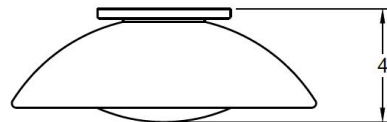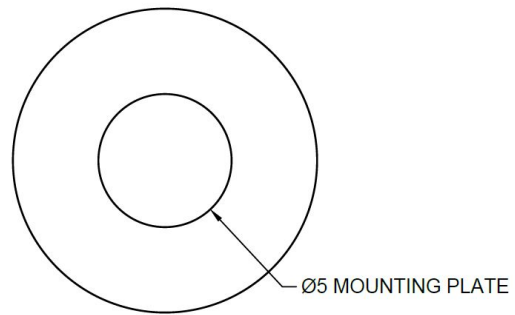




Flushmount - 12-Inch

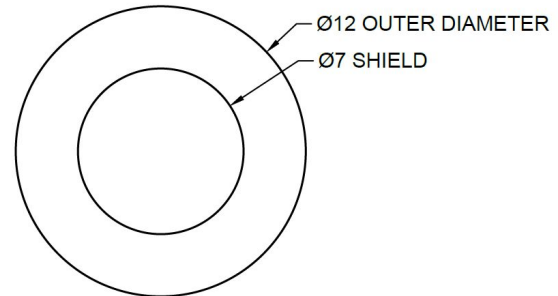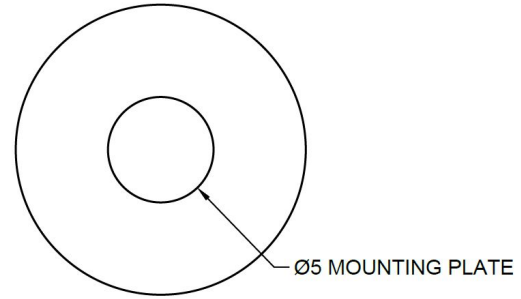

Flushmount - 14-Inch

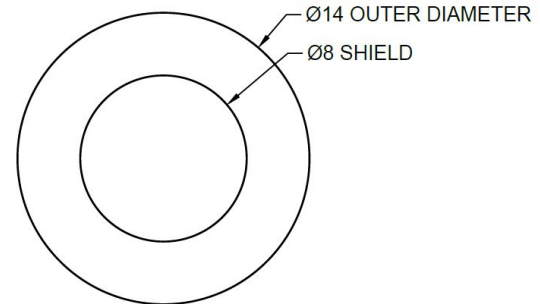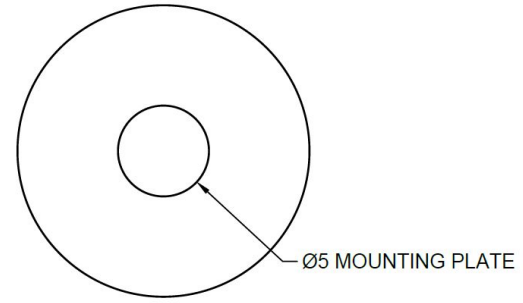

Flushmount - 18-Inch

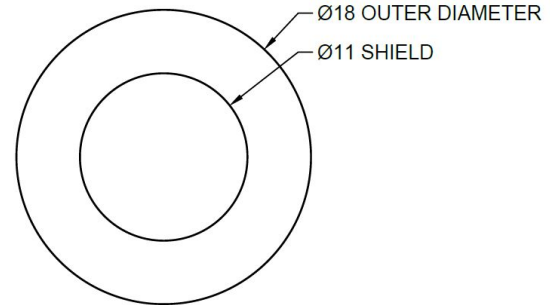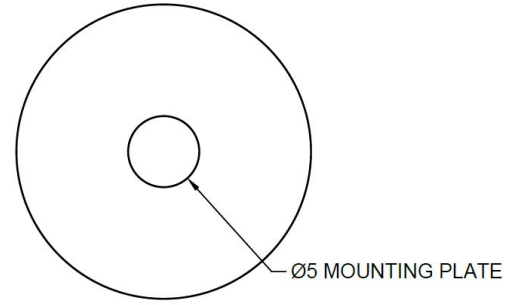

Flushmount - 22-Inch

