

LED Backlit Panel Light

Features:


- Input Voltage: 120-277VAC 50/60Hz.
- ETL & DLC 5.1 certified.
- 1301m/W high lumen efficacy, 80+ CRI.
- 0-10V Dimmable LED driver.
 Adjustable CCT: 3500K/4000K/5000K/5700K/6500K
 Adjustable Power: 15W/20W/25W/30W/40W.
- High efficiency LM80 SMD LEDs.
- Designed for 50,000 hours lifetime.
- Instant startup, soft light, no glare, no noise.
- Easy for installation.

Application:

- ◆ Factory, offices .
- ◆ Living room, clubs, lobbies.
- ◆ Supermarkets, school, hotel.
- ◆ Exhibitions, etc..

Product Dimension:

Unit:inch













LED Backlit Panel Light

Specifications

LED Panel Light

Model:	SZ-PL22-A40W-CCT	
Wattage:	15W/20W/25W/30W/40W	
CCT:	3500K/4000K/5000K/5700K/6500K	
Input Voltage:	120-277VAC 50/60hz	
Power Factor:	>0.9	
Efficacy:	125LM/W	
CRI:	>80	
THD:	<20	
Dimmable:	Yes	
Dimensions:	2*2FT 603*603mm	
Lifespan:	>50,000hours	
Beam Angle:	120°	
Operating Temperature:	-20°C to 40°C	
IP Grade:	IP40	
Certification:	ETL, DLC5. 1	
Optional Accessory	Emergency Driver: Max 8W, Recharge time:	
	≥24Hrs, Discharge time :90minutes.	
	Sensor: PIR Sensor or Microwave Sensor.	

Package

Size	Qty/Carton	Gross Weight	Net Weight
64.5*22.5*65cm	6	11.14Kg	10.2Kg


Installation instructions


Recessed installation

2*2FT Panel

1.Replace existing lighting fixture from ceiling with LED Panel.

2.Use the protective brackets for the sake of safety.



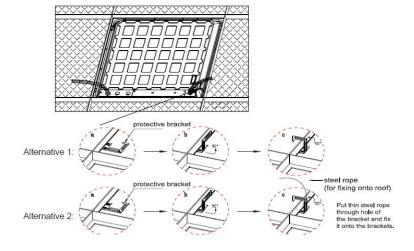





LED Backlit Panel Light

Installation Guide


1. Unscrew the driver cover.



2. Connect the conduit to the driver box.



3. Connect other wires separately.



4.Put back the driver cover and fix it by screw. Select adjustable power and color temperature.

