

# **LED Backlit Panel Light**

#### Features:

- Input Voltage:120-277VAC 50/60Hz. with Emergency LED driver
- ETL & DLC 5.1 certified.
- 1301m/W high lumen efficacy, 80+ CRI.
- 0-10V Dimmable LED driver.

  Adjustable CCT: 4000K/5000K/6000K

  Adjustable Power: 40W/50W/72W.
  - High efficiency LM80 SMD LEDs.
- Designed for 50,000 hours lifetime.
- Instant startup, soft light, no glare, no noise.
- Easy for installation.

### Application:

- ◆ Factory, offices .
- ◆ Living room, clubs, lobbies.
- ◆ Supermarkets, school, hotel.
- ◆ Exhibitions, etc..

#### Product Dimension:












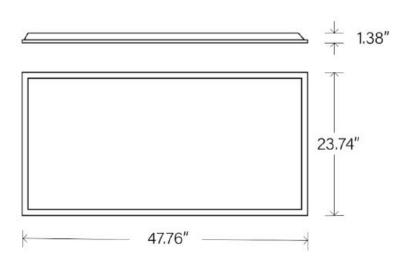



# **LED Backlit Panel Light**

## Specifications

## LED Troffer Light

Model:	SZ-PL24-72W-ACP (EM)	
Wattage:	40W/50W/72W	
CCT:	4000K/5000K/6000K	
Input Voltage:	120-277VAC 50/60hz	
Power Factor:	>0.9	
Efficacy:	125LM/W	
CRI:	>80	
THD:	<20	
Dimmable:	Yes	
Dimensions:	2*4FT	
Warranty:	5 years	
Beam Angle:	120°	
Operating Temperature:	-20°C to 50°C	
IP Grade:	IP20	
Certification:	ETL, DLC5. 1	
Emergency LED Driver	Max 8W, Recharge time: ≥24Hrs,	
	Discharge time :90minutes	

## Package


Size	Qty/Carton	Gross Weight	Net Weight
49. 09*11. 81*25. 31"	6	29.35Kg	24.9Kg

### Installation instructions


#### Recessed installation

2\*4FT Panel

1.Replace existing lighting fixture from ceiling with LED Panel



2.Use the protective brackets for the sake of safety.

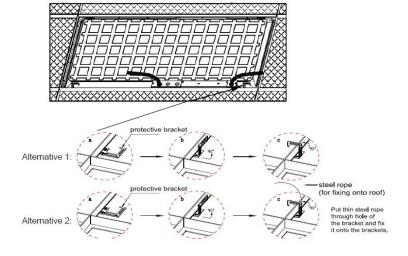





# **LED Backlit Panel Light**

#### **Installation Guide**


1.Unscrew the driver cover.



2.Connect the conduit to the driver box



3. Connect other wires separately.



4.Put back the driver cover and fix it by screw. Select adjustable power and color temperature

