

Features :

- High End Design with deep regress with remote driver j box. .
- ETL certified.
- Provides comfortable diffused light with no dark spots.
- AC100-277V, 0-10V Dimmable .
- 5CCT selectable version optional.
- High efficiency LM80 SMD LEDs.
- Designed for 50,000 hours lifetime.
- Suitable for indoor Dry, Damp locations.
- Easy and quick installation to the ceiling.




Application:

- ◆ Residential.
- ◆ Property management.
- ◆ Office, Multi-family.
- ◆ Hospitality, Healthcare etc..



Product Dimension:

Unit:mm

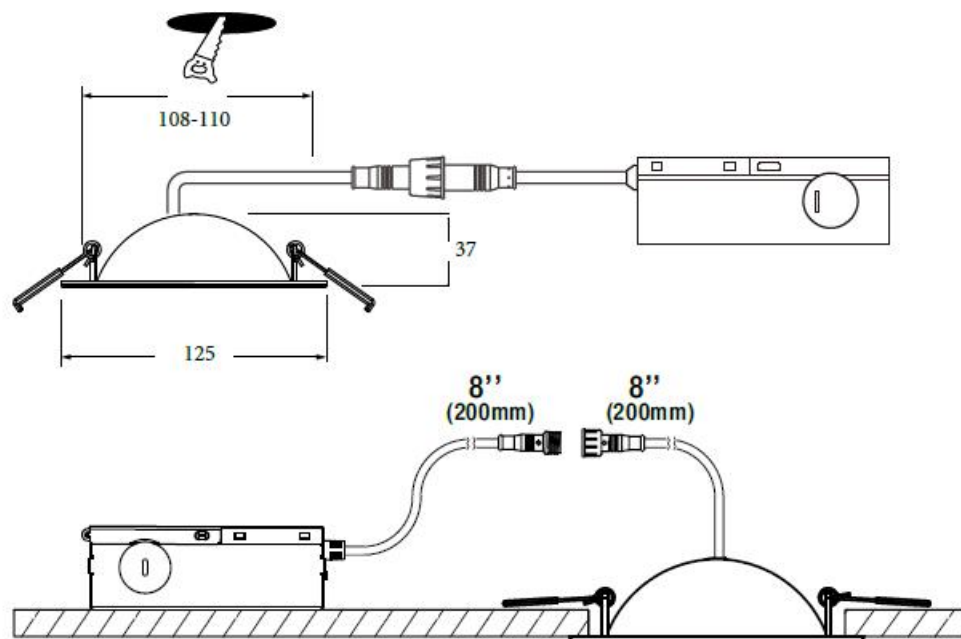

Specifications

Rotatable Gimbal LED Downlight

| | |
|-----------------|---------------------------------------|
| Model: | SZ-DL10W4-RG-CCT-R-277V |
| Wattage: | 10W |
| Input: | 100-277V |
| Size: | 4 inch |
| CCT Selectable: | 2700K/3000K/3500K/4000K/5000K |
| CRI: | 80 |
| Beam Angle: | 36° |
| Function | Horizontal 360° & Tilt 90° adjustment |
| Lumens: | 900LM |
| PF: | >0.9 |
| Dimmable: | 0-10V |
| Housing color: | White / Black |

Package

| Size | Qty/Carton | Gross Weight |
|--------------|------------|--------------|
| 44.5*44*28cm | 30 | 16.1Kg |

Installation instructions

1 Tighten Romex/NM connector clamp. Select desired CCT by sliding switch in driver box end and close junction box.(If 3CCT/5CCT)

2 Connect light engine. Be sure to properly align connectors and fully screw down connector cover.

3 Place driver box into ceiling.
(Optional: Mount using mounting tabs and screws)

4 Push up spring-arms on side of fixture, lift into ceiling, and release spring-arms.

5 Completed the installation and Turn on power and enjoy your new lighting.