

### Features :

- Input Voltage: 120-277VAC 50/60Hz.
- ETL & DLC 5.1 certified.
- 130lm/W high lumen efficacy, 80+ CRI.
- 0-10V Dimmable LED driver.  
Adjustable CCT: 3500K/4000K/5000K  
Adjustable Power: 20W/30W/40W.
- High efficiency LM80 SMD LEDs.
- Designed for 50,000 hours lifetime.
- Instant startup, soft light, no glare, no noise.
- Easy for installation.




### Application:

- ◆ Factory, offices .
- ◆ Living room, clubs, lobbies.
- ◆ Supermarkets, school, hotel.
- ◆ Exhibitions, etc..



### Product Dimension:

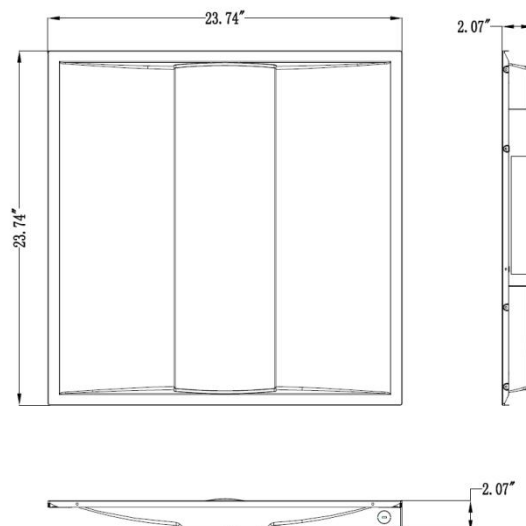

## Specifications

### LED Troffer Light


|                        |                                                                                                                          |
|------------------------|--------------------------------------------------------------------------------------------------------------------------|
| Model:                 | SZ-TR22-50W-ACP                                                                                                          |
| Wattage:               | 20W/30W/40W                                                                                                              |
| CCT:                   | 3500K/4000K/5000K                                                                                                        |
| Input Voltage:         | 120-277VAC 50/60hz                                                                                                       |
| Power Factor:          | >0.9                                                                                                                     |
| Efficacy:              | 130LM/W                                                                                                                  |
| CRI:                   | >80                                                                                                                      |
| THD:                   | <20                                                                                                                      |
| Dimmable:              | Yes                                                                                                                      |
| Dimensions:            | 2*2FT                                                                                                                    |
| Warranty:              | 5 years                                                                                                                  |
| Beam Angle:            | 120°                                                                                                                     |
| Operating Temperature: | -20°C to 50°C                                                                                                            |
| IP Grade:              | IP20                                                                                                                     |
| Certification:         | ETL, DLC5.1                                                                                                              |
| Optional Accessory     | Emergency Driver:Max 8W, Recharge time:<br>≥24Hrs, Discharge time :90minutes.<br>Sensor: PIR Sensor or Microwave Sensor. |

## Package


| Size              | Qty/Carton | Gross Weight | Net Weight |
|-------------------|------------|--------------|------------|
| 25.51*9.84*25.71" | 4          | 11.85Kg      | 9.9Kg      |

## Installation instructions


1.Unscrew the driver cover.




2.Connect the conduit to the driver box.



3.Connect other wires separately.

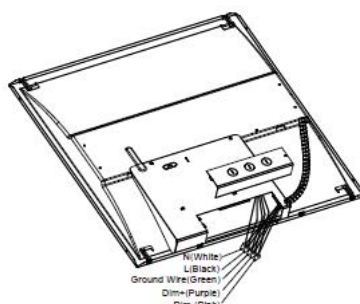


4.Put back the driver cover and fix it by screw.

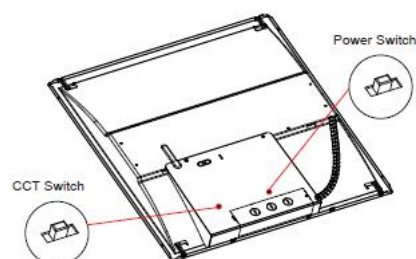


### Recessed Installation

1. Replace existing lighting fixture from ceiling with LED Troffer.

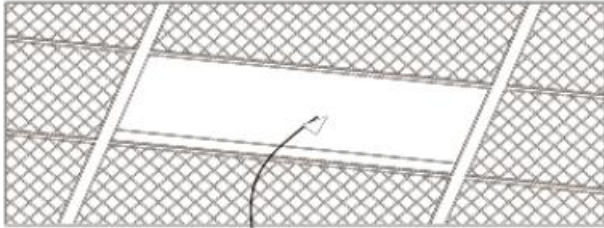

1. Replace existing lighting fixture from ceiling with LED Troffer.

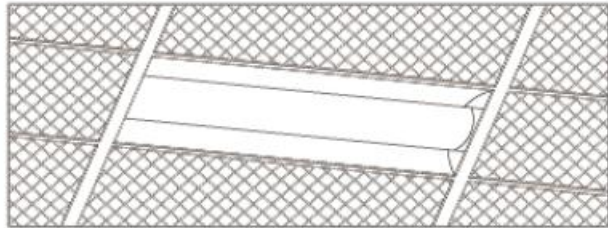

3. Use the protective brackets for the sake of safety.

