

TED BRADLEY STUDIO



Constellation - Six Rings

Exceptional craftsmanship. Unlike anything else.



The sculpture is inspired by a constellation, where each porcelain ring is like a star in the night sky. When looking at the rings individually, they appear random and disconnected - the eyes dance without coming to rest on a single focal point. But stepping back and viewing the sculpture as a whole, it comes together into something cohesive and beautiful.

The sculpture can cast gentle candlelight on a dining table or brighten an entire room.



We recommend that Constellation sculptures be mounted 70" AFF or higher, to show the beautiful underside of the rings rather than straight on the side profile.


AS SHOWN ON WEBSITE

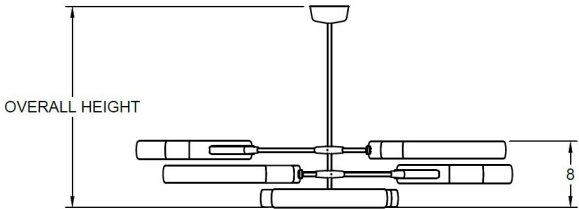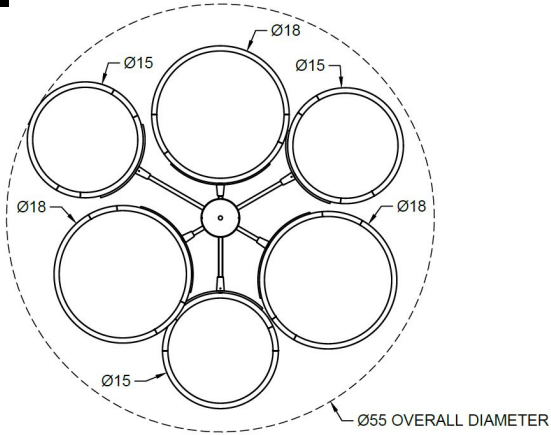

Constellation - Six Rings Round

Dimensions	55" diameter, 8" body height (as shown) Dimensions are customizable Can be configured as round or linear
Minimums Maximum	12" Height, 55" Diameter 60" Diameter
Ring Sizes	18" and 15" diameters
Light	4,500 lumens total 660-800 per ring LED color accuracy 95+ CRI 2,400-5,000K color by request Bulb life 50,000 hours (17yrs at 8hrs/day) Relamping kits available
Dimming	Minimum dimming range 5% Electronic Low Voltage (see details)
Mounting	Standard junction box 45 lbs / 21 kg Sloped ceiling by request
Power	120V 90W (15W per ring) 240-277V available with remote driver
LED Drivers	Integrated in canopy, or remote
UL Certification	Light ring design is UL certified; sculpture not certified
Production	Handmade in Colorado Patents pending Rush by request

We recommend that Constellation sculptures be mounted 70" AFF or higher, to show the beautiful underside of the rings rather than straight on the side profile.

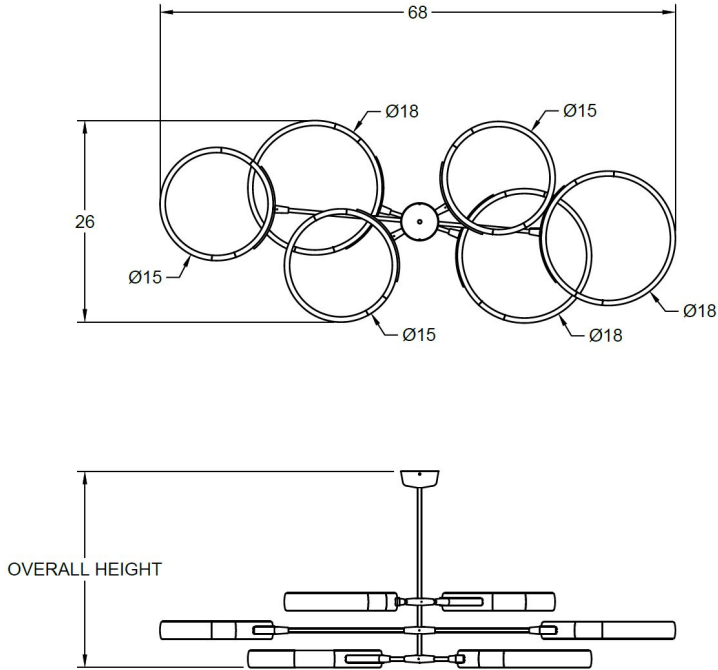

Constellation - Six Rings Linear

Dimensions	68"L x 26"W x 10"H (as shown) Dimensions are customizable Can be configured as round or linear
Minimum Height	14" Height
Ring Sizes	18" and 15" diameters
Light	4,500 lumens total 660-800 per ring LED color accuracy 95+ CRI 2,400-5,000K color by request Bulb life 50,000 hours (17yrs at 8hrs/day) Relamping kits available
Dimming	Minimum dimming range 5% Electronic Low Voltage (see details)
Mounting	Standard junction box 45 lbs / 21 kg Sloped ceiling by request
Power	120V 90W (15W per ring) 240-277V available with remote driver
LED Drivers	Integrated in canopy, or remote
UL Certification	Light ring design is UL certified; sculpture not certified
Production	Handmade in Colorado Rush by request Patents pending