


TED BRADLEY STUDIO

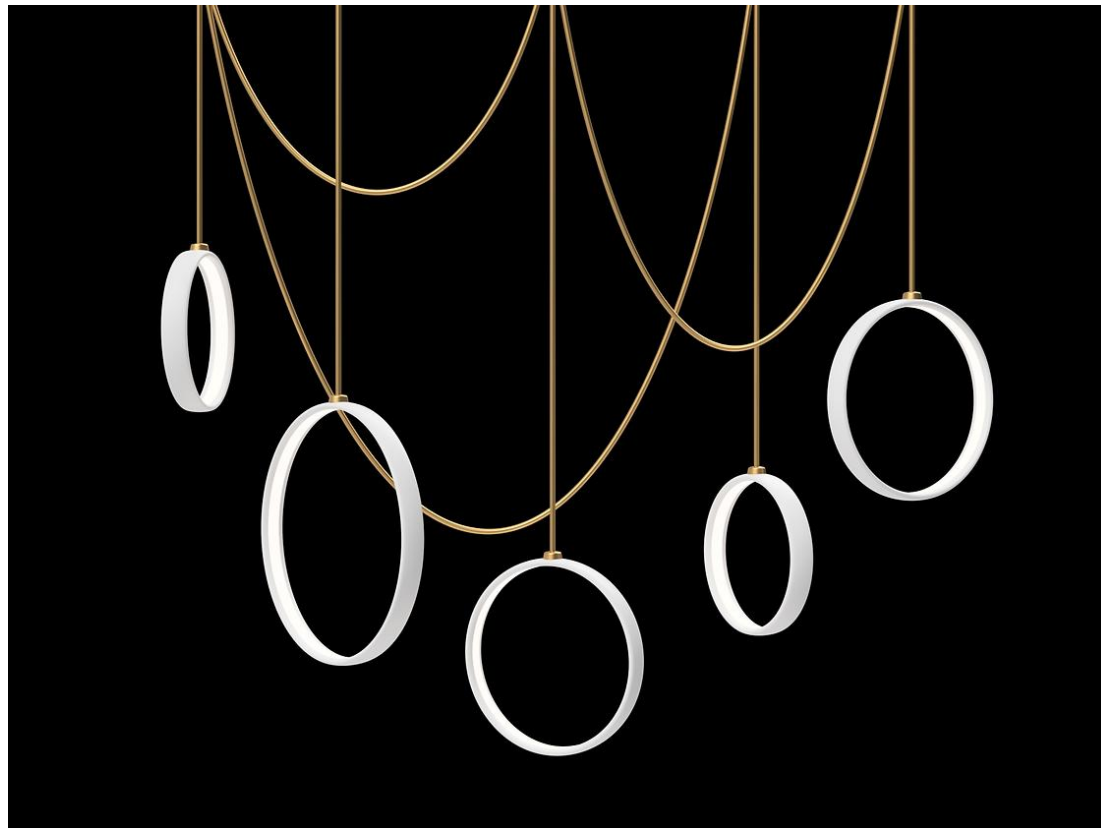



Swag Pendants - Five Rings

Exceptional craftsmanship. Unlike anything else.

White porcelain rings hang from sweeping braided metal cords. Warm, dimmable LEDs are inlaid on the inside surface of each ring.



The sculpture is inspired by a solar eclipse, one of nature's most powerful aesthetic displays. The free form of the sweeping cords contrasts with geometric perfection of the porcelain rings. These two styles come together in an unexpected harmony and visual magnetism.

The sculpture can cast gentle candlelight on a dining table or brighten an entire room.

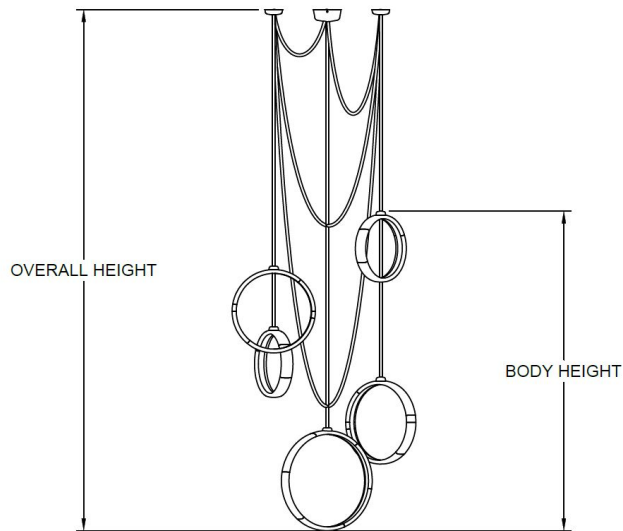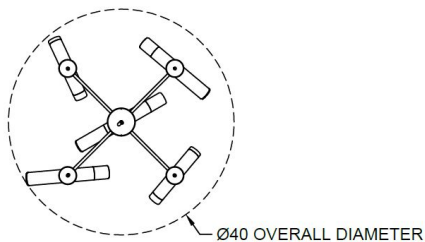



Swag Pendants - Set of 5 Round

Dimensions	Dimensions specified by customer. Can be configured as round or linear.
Minimum Height	26"
Maximum Height	Unlimited
Ring Sizes	22", 18", 15", 12" diameters
Light	530-980 lumens per ring. LED color accuracy 95+ CRI. 2,400-5,000K color by request. Bulb life 50,000 hours (17yrs at 8hrs/day). Relamping kits available.
Dimming	Minimum dimming range 0.1% Electronic Low Voltage (see details)
Mounting	One standard junction box 7-9 lbs / 3-4 kg per pendant Wood backing behind drywall recommended Sloped ceiling by request Canopy Options
Power	120V 12-19W per ring 240-277V by request
LED Drivers	Integrated in canopy or remote (see details)
UL Certification	Light ring design is UL certified; sculpture not certified
Production	Handmade in Colorado Patents pending Rush by request

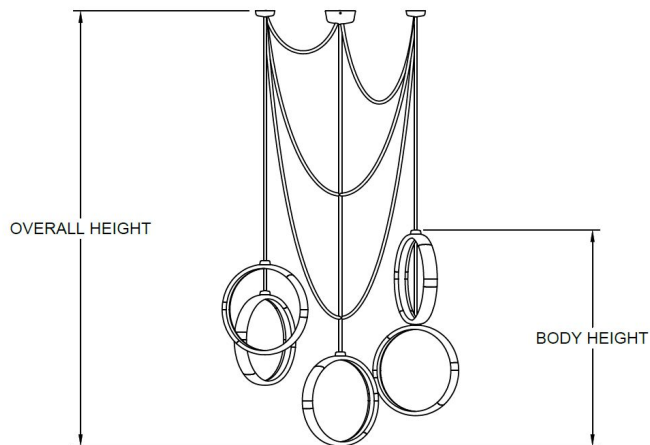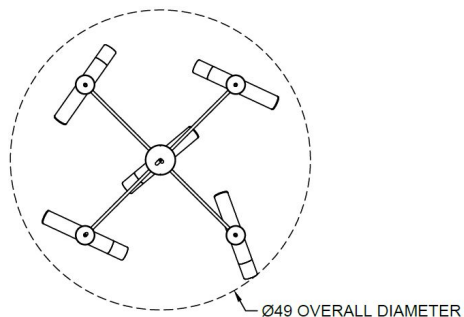



Swag Pendants - Set of 5 Round

Dimensions	Dimensions specified by customer. Can be configured as round or linear.
Minimum Height	26"
Maximum Height	Unlimited
Ring Sizes	22", 18", 15", 12" diameters
Light	530-980 lumens per ring. LED color accuracy 95+ CRI. 2,400-5,000K color by request. Bulb life 50,000 hours (17yrs at 8hrs/day). Relamping kits available.
Dimming	Minimum dimming range 0.1% Electronic Low Voltage (see details)
Mounting	One standard junction box 7-9 lbs / 3-4 kg per pendant Wood backing behind drywall recommended Sloped ceiling by request Canopy Options
Power	120V 12-19W per ring 240-277V by request
LED Drivers	Integrated in canopy or remote (see details)
UL Certification	Light ring design is UL certified; sculpture not certified
Production	Handmade in Colorado Patents pending Rush by request

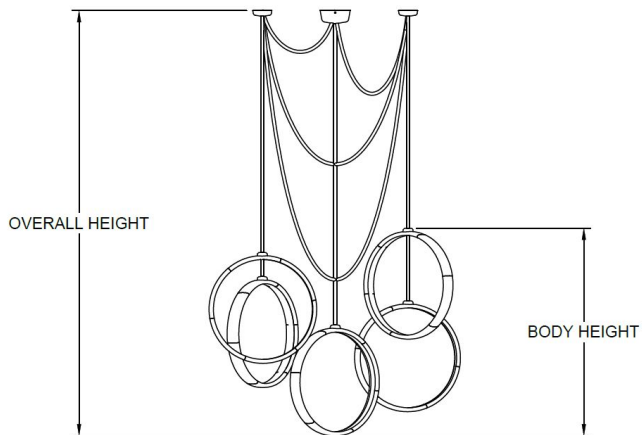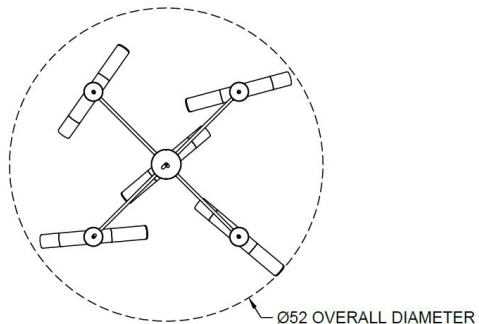



Swag Pendants - Set of 5 Round

Dimensions	Dimensions specified by customer. Can be configured as round or linear.
Minimum Height	26"
Maximum Height	Unlimited
Ring Sizes	22", 18", 15", 12" diameters
Light	530-980 lumens per ring. LED color accuracy 95+ CRI. 2,400-5,000K color by request. Bulb life 50,000 hours (17yrs at 8hrs/day). Relamping kits available.
Dimming	Minimum dimming range 0.1% Electronic Low Voltage (see details)
Mounting	One standard junction box 7-9 lbs / 3-4 kg per pendant Wood backing behind drywall recommended Sloped ceiling by request Canopy Options
Power	120V 12-19W per ring 240-277V by request
LED Drivers	Integrated in canopy or remote (see details)
UL Certification	Light ring design is UL certified; sculpture not certified
Production	Handmade in Colorado Patents pending Rush by request

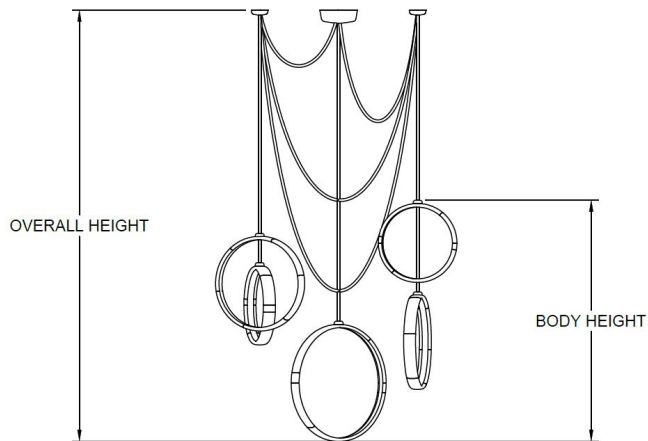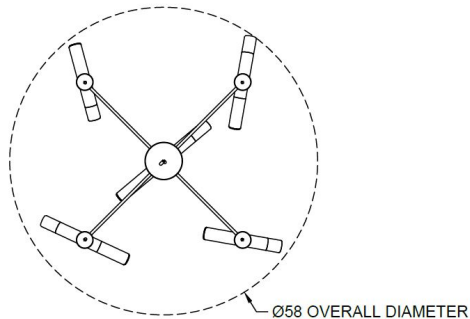




Swag Pendants - Set of 5 Round

Dimensions	Dimensions specified by customer. Can be configured as round or linear.
Minimum Height	26"
Maximum Height	Unlimited
Ring Sizes	22", 18", 15", 12" diameters
Light	530-980 lumens per ring. LED color accuracy 95+ CRI. 2,400-5,000K color by request. Bulb life 50,000 hours (17yrs at 8hrs/day). Relamping kits available.
Dimming	Minimum dimming range 0.1% Electronic Low Voltage (see details)
Mounting	One standard junction box 7-9 lbs / 3-4 kg per pendant Wood backing behind drywall recommended Sloped ceiling by request Canopy Options
Power	120V 12-19W per ring 240-277V by request
LED Drivers	Integrated in canopy or remote (see details)
UL Certification	Light ring design is UL certified; sculpture not certified
Production	Handmade in Colorado Patents pending Rush by request

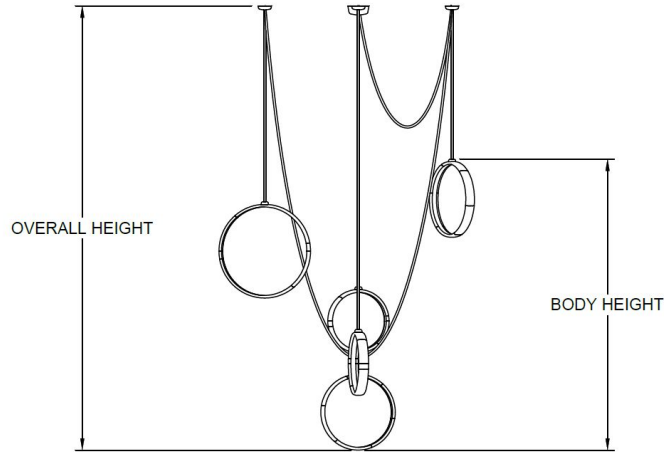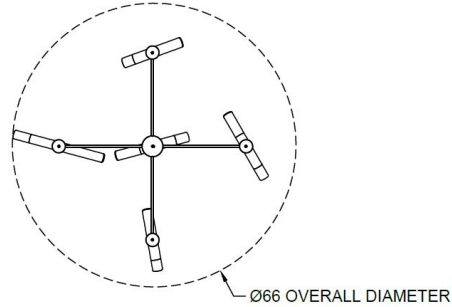




Swag Pendants - Set of 5 Round

Dimensions	Dimensions specified by customer. Can be configured as round or linear.
Minimum Height	26"
Maximum Height	Unlimited
Ring Sizes	22", 18", 15", 12" diameters
Light	530-980 lumens per ring. LED color accuracy 95+ CRI. 2,400-5,000K color by request. Bulb life 50,000 hours (17yrs at 8hrs/day). Relamping kits available.
Dimming	Minimum dimming range 0.1% Electronic Low Voltage (see details)
Mounting	One standard junction box 7-9 lbs / 3-4 kg per pendant Wood backing behind drywall recommended Sloped ceiling by request Canopy Options
Power	120V 12-19W per ring 240-277V by request
LED Drivers	Integrated in canopy or remote (see details)
UL Certification	Light ring design is UL certified; sculpture not certified
Production	Handmade in Colorado Patents pending Rush by request

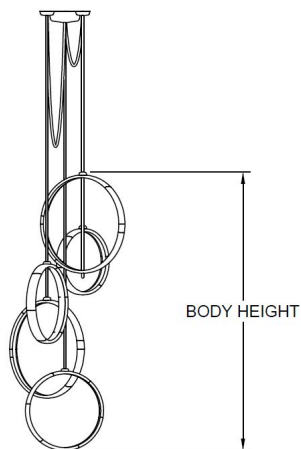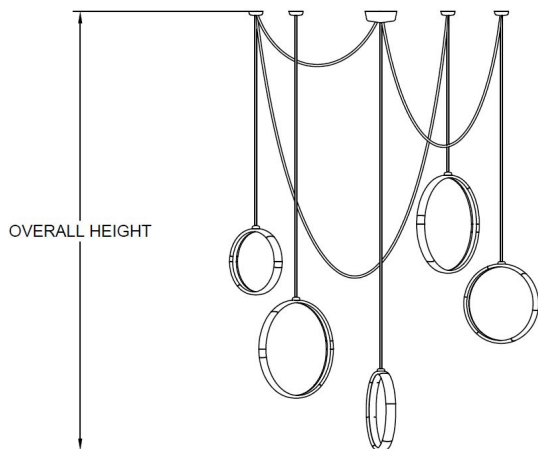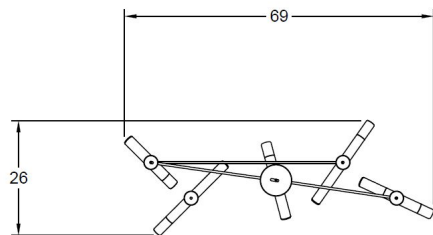




Swag Pendants - Set of 5 Organic

Dimensions	Dimensions specified by customer. Can be configured as round or linear.
Minimum Height	26"
Maximum Height	Unlimited
Ring Sizes	22", 18", 15", 12" diameters
Light	530-980 lumens per ring. LED color accuracy 95+ CRI. 2,400-5,000K color by request. Bulb life 50,000 hours (17yrs at 8hrs/day). Relamping kits available.
Dimming	Minimum dimming range 0.1% Electronic Low Voltage (see details)
Mounting	One standard junction box 7-9 lbs / 3-4 kg per pendant Wood backing behind drywall recommended Sloped ceiling by request Canopy Options
Power	120V 12-19W per ring 240-277V by request
LED Drivers	Integrated in canopy or remote (see details)
UL Certification	Light ring design is UL certified; sculpture not certified
Production	Handmade in Colorado Patents pending Rush by request

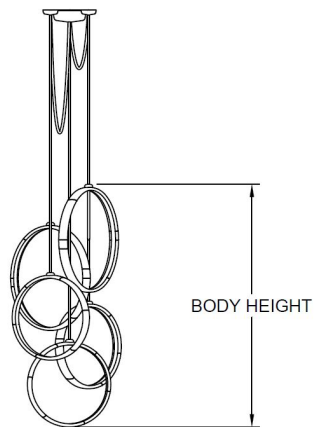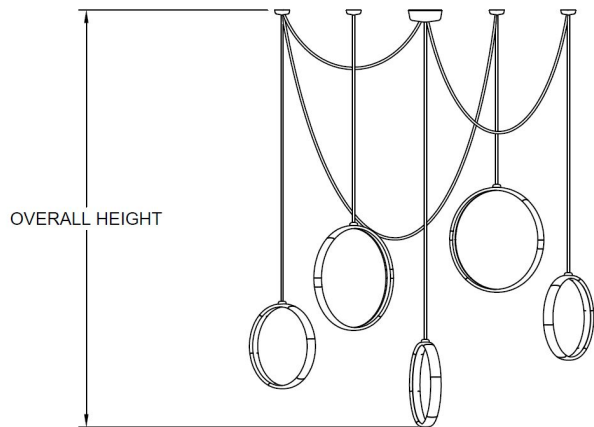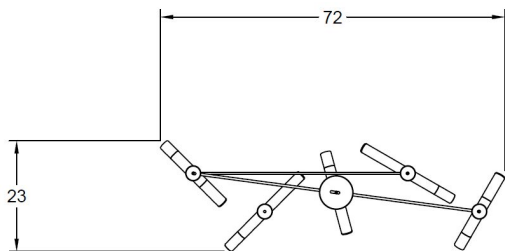




Swag Pendants - Set of 5 Linear M

Dimensions	Dimensions specified by customer. Can be configured as round or linear.
Minimum Height	26"
Maximum Height	Unlimited
Ring Sizes	22", 18", 15", 12" diameters
Light	530-980 lumens per ring. LED color accuracy 95+ CRI. 2,400-5,000K color by request. Bulb life 50,000 hours (17yrs at 8hrs/day). Relamping kits available.
Dimming	Minimum dimming range 0.1% Electronic Low Voltage (see details)
Mounting	One standard junction box 7-9 lbs / 3-4 kg per pendant Wood backing behind drywall recommended Sloped ceiling by request Canopy Options
Power	120V 12-19W per ring 240-277V by request
LED Drivers	Integrated in canopy or remote (see details)
UL Certification	Light ring design is UL certified; sculpture not certified
Production	Handmade in Colorado Patents pending Rush by request

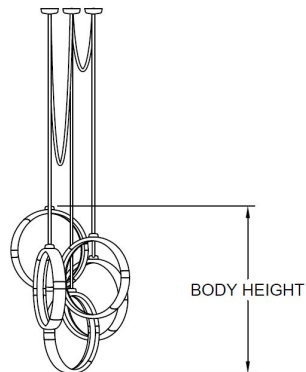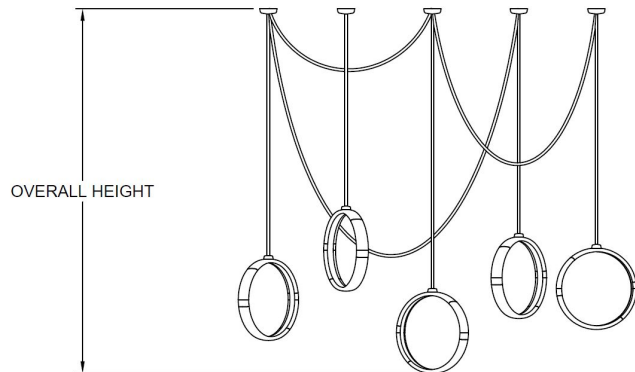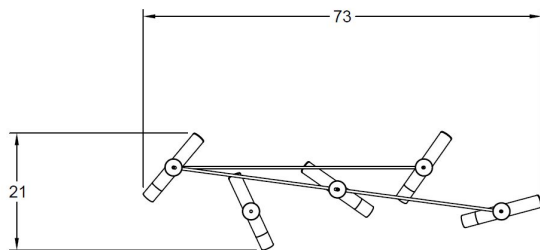




Swag Pendants - Set of 5 Linear M

Dimensions	Dimensions specified by customer. Can be configured as round or linear.
Minimum Height	26"
Maximum Height	Unlimited
Ring Sizes	22", 18", 15", 12" diameters
Light	530-980 lumens per ring. LED color accuracy 95+ CRI. 2,400-5,000K color by request. Bulb life 50,000 hours (17yrs at 8hrs/day). Relamping kits available.
Dimming	Minimum dimming range 0.1% Electronic Low Voltage (see details)
Mounting	One standard junction box 7-9 lbs / 3-4 kg per pendant Wood backing behind drywall recommended Sloped ceiling by request Canopy Options
Power	120V 12-19W per ring 240-277V by request
LED Drivers	Integrated in canopy or remote (see details)
UL Certification	Light ring design is UL certified; sculpture not certified
Production	Handmade in Colorado Patents pending Rush by request

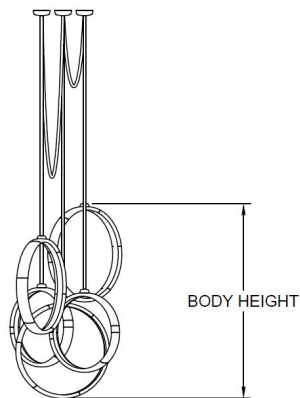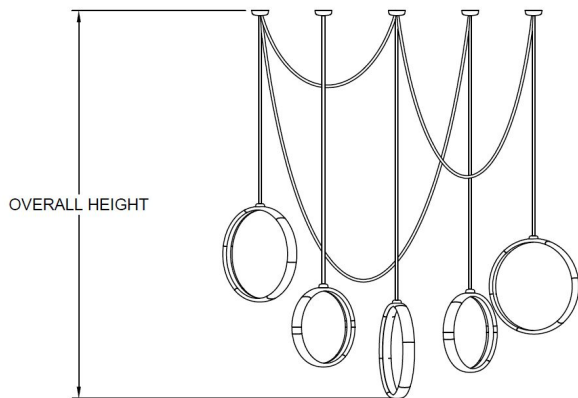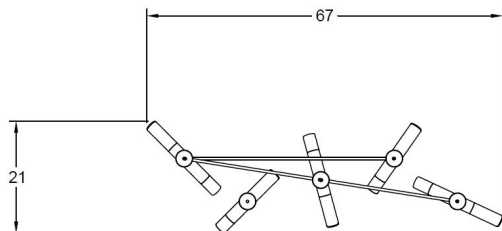




Swag Pendants - Set of 5 Linear U

Dimensions	Dimensions specified by customer. Can be configured as round or linear.
Minimum Height	26"
Maximum Height	Unlimited
Ring Sizes	22", 18", 15", 12" diameters
Light	530-980 lumens per ring. LED color accuracy 95+ CRI. 2,400-5,000K color by request. Bulb life 50,000 hours (17yrs at 8hrs/day). Relamping kits available.
Dimming	Minimum dimming range 0.1% Electronic Low Voltage (see details)
Mounting	One standard junction box 7-9 lbs / 3-4 kg per pendant Wood backing behind drywall recommended Sloped ceiling by request Canopy Options
Power	120V 12-19W per ring 240-277V by request
LED Drivers	Integrated in canopy or remote (see details)
UL Certification	Light ring design is UL certified; sculpture not certified
Production	Handmade in Colorado Patents pending Rush by request

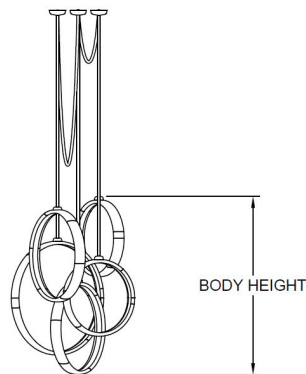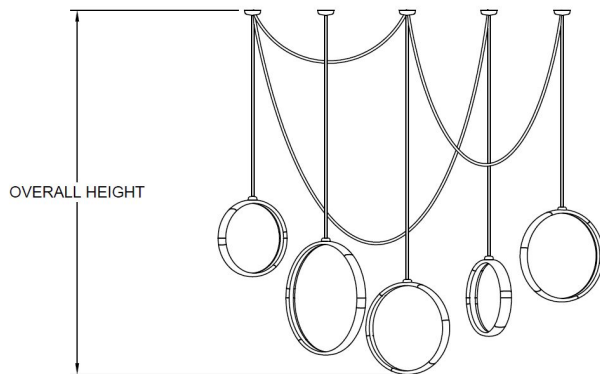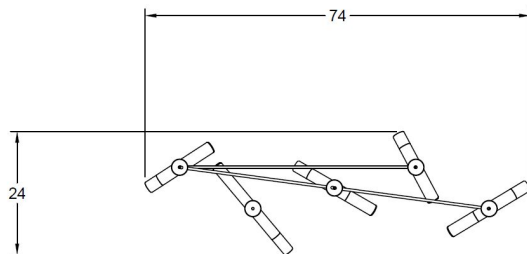




Swag Pendants - Set of 5 Linear U

Dimensions	Dimensions specified by customer. Can be configured as round or linear.
Minimum Height	26"
Maximum Height	Unlimited
Ring Sizes	22", 18", 15", 12" diameters
Light	530-980 lumens per ring. LED color accuracy 95+ CRI. 2,400-5,000K color by request. Bulb life 50,000 hours (17yrs at 8hrs/day). Relamping kits available.
Dimming	Minimum dimming range 0.1% Electronic Low Voltage (see details)
Mounting	One standard junction box 7-9 lbs / 3-4 kg per pendant Wood backing behind drywall recommended Sloped ceiling by request Canopy Options
Power	120V 12-19W per ring 240-277V by request
LED Drivers	Integrated in canopy or remote (see details)
UL Certification	Light ring design is UL certified; sculpture not certified
Production	Handmade in Colorado Patents pending Rush by request

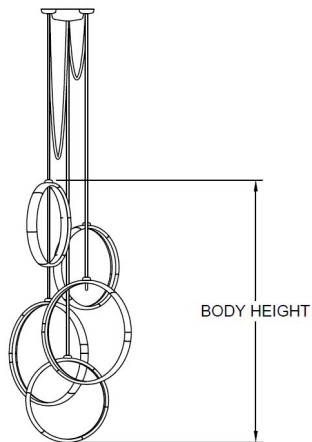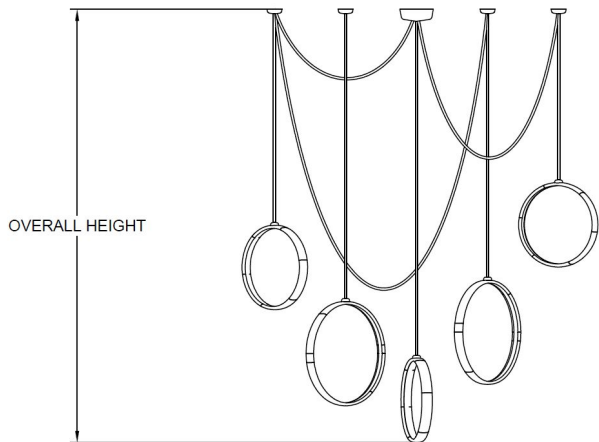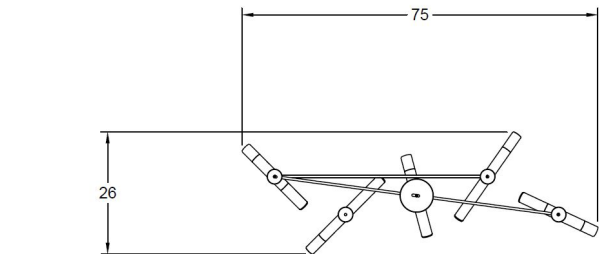




Swag Pendants - Set of 5 Linear U

Dimensions	Dimensions specified by customer. Can be configured as round or linear.
Minimum Height	26"
Maximum Height	Unlimited
Ring Sizes	22", 18", 15", 12" diameters
Light	530-980 lumens per ring. LED color accuracy 95+ CRI. 2,400-5,000K color by request. Bulb life 50,000 hours (17yrs at 8hrs/day). Relamping kits available.
Dimming	Minimum dimming range 0.1% Electronic Low Voltage (see details)
Mounting	One standard junction box 7-9 lbs / 3-4 kg per pendant Wood backing behind drywall recommended Sloped ceiling by request Canopy Options
Power	120V 12-19W per ring 240-277V by request
LED Drivers	Integrated in canopy or remote (see details)
UL Certification	Light ring design is UL certified; sculpture not certified
Production	Handmade in Colorado Patents pending Rush by request

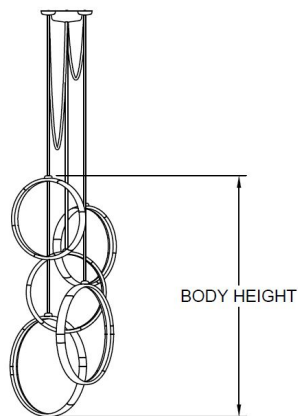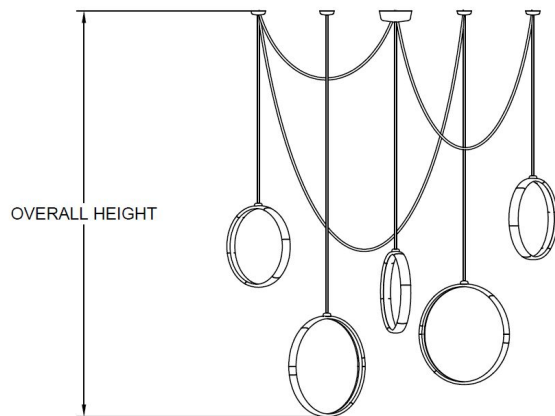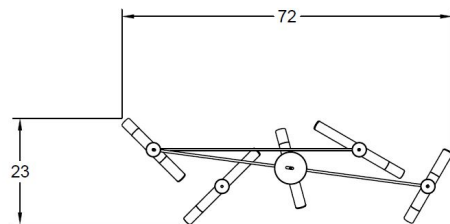


Swag Pendants - Set of 5 Linear W

Dimensions	Dimensions specified by customer. Can be configured as round or linear.
Minimum Height	26"
Maximum Height	Unlimited
Ring Sizes	22", 18", 15", 12" diameters
Light	530-980 lumens per ring. LED color accuracy 95+ CRI. 2,400-5,000K color by request. Bulb life 50,000 hours (17yrs at 8hrs/day). Relamping kits available.
Dimming	Minimum dimming range 0.1% Electronic Low Voltage (see details)
Mounting	One standard junction box 7-9 lbs / 3-4 kg per pendant Wood backing behind drywall recommended Sloped ceiling by request Canopy Options
Power	120V 12-19W per ring 240-277V by request
LED Drivers	Integrated in canopy or remote (see details)
UL Certification	Light ring design is UL certified; sculpture not certified
Production	Handmade in Colorado Patents pending Rush by request

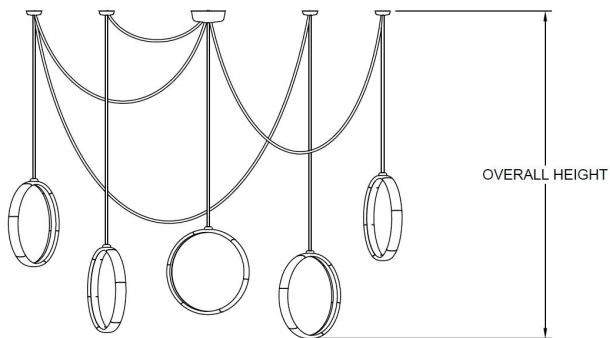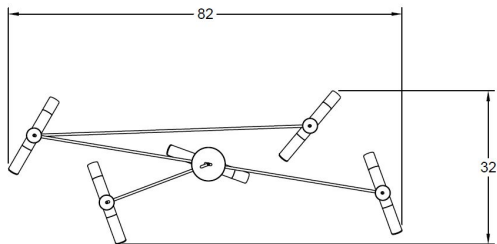

Swag Pendants - Set of 5 Linear W

Dimensions	Dimensions specified by customer. Can be configured as round or linear.
Minimum Height	26"
Maximum Height	Unlimited
Ring Sizes	22", 18", 15", 12" diameters
Light	530-980 lumens per ring. LED color accuracy 95+ CRI. 2,400-5,000K color by request. Bulb life 50,000 hours (17yrs at 8hrs/day). Relamping kits available.
Dimming	Minimum dimming range 0.1% Electronic Low Voltage (see details)
Mounting	One standard junction box 7-9 lbs / 3-4 kg per pendant Wood backing behind drywall recommended Sloped ceiling by request Canopy Options
Power	120V 12-19W per ring 240-277V by request
LED Drivers	Integrated in canopy or remote (see details)
UL Certification	Light ring design is UL certified; sculpture not certified
Production	Handmade in Colorado Patents pending Rush by request

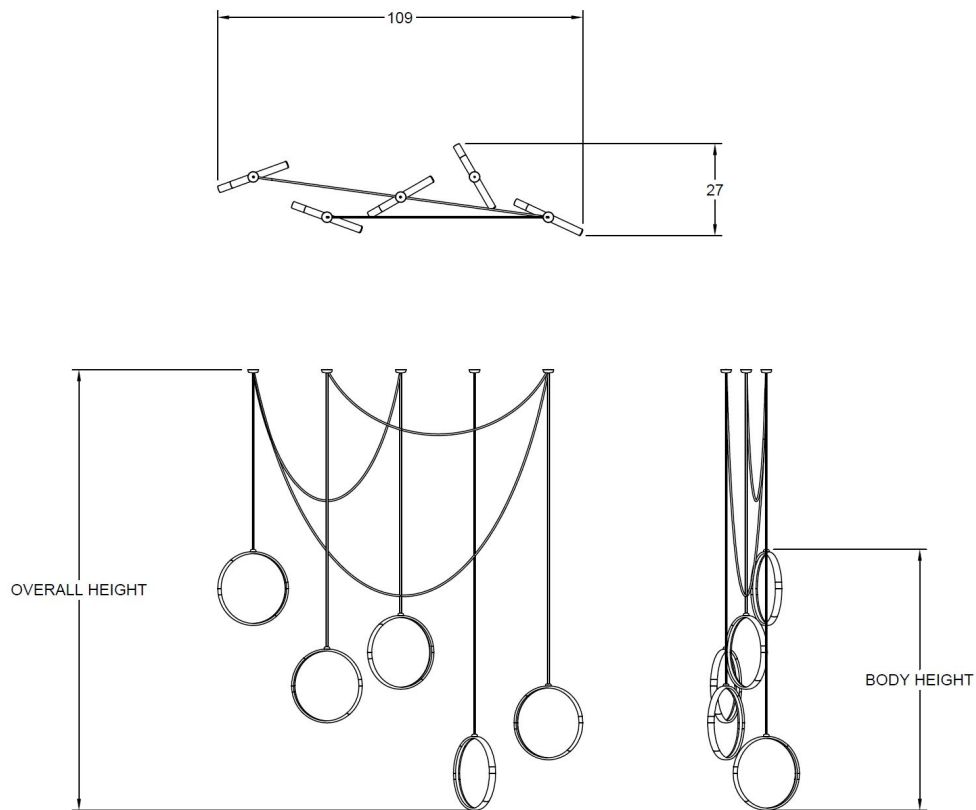

Swag Pendants - Set of 5 Linear

Dimensions	Dimensions specified by customer. Can be configured as round or linear.
Minimum Height	26"
Maximum Height	Unlimited
Ring Sizes	22", 18", 15", 12" diameters
Light	530-980 lumens per ring. LED color accuracy 95+ CRI. 2,400-5,000K color by request. Bulb life 50,000 hours (17yrs at 8hrs/day). Relamping kits available.
Dimming	Minimum dimming range 0.1% Electronic Low Voltage (see details)
Mounting	One standard junction box 7-9 lbs / 3-4 kg per pendant Wood backing behind drywall recommended Sloped ceiling by request Canopy Options
Power	120V 12-19W per ring 240-277V by request
LED Drivers	Integrated in canopy or remote (see details)
UL Certification	Light ring design is UL certified; sculpture not certified
Production	Handmade in Colorado Patents pending Rush by request

Junction Box Location & Swag Cords

When selecting a configuration, consider the location of the ceiling electrical connection shown in blue in the mockups to the right.

Adding a Swag Cord

A swag cord can be added to any design. This is useful if you want to hang the pendant in a location other than where the ceiling electrical connection is.

Removing a Swag Cord

A swag cord can be removed from any design. This can be achieved by having your electrician run a low voltage wire (shown in red) through the ceiling cavity from the primary electrical connection to one of the pendant canopies.

