
TED BRADLEY STUDIO

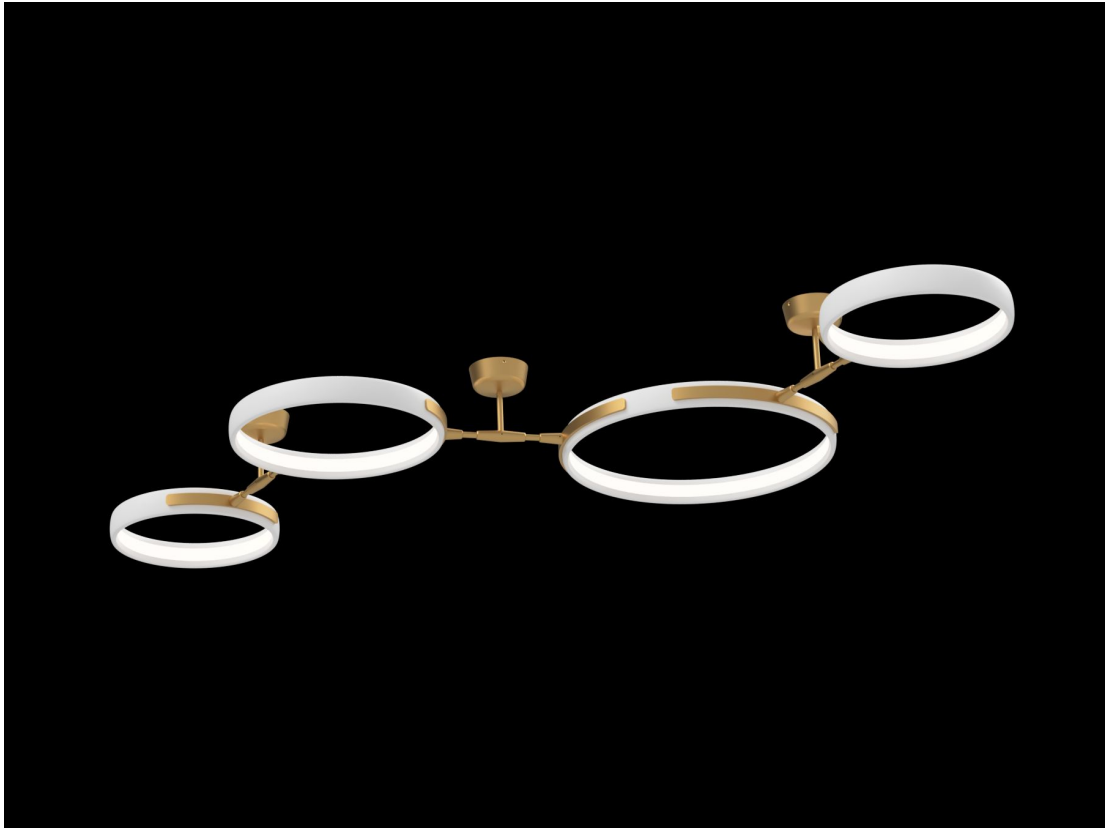

Vine - Four Rings Linear


Exceptional craftsmanship. Unlike anything else.

This series of light sculptures is inspired by vines in a lush forest, alive with growth and exploring the surface of the ceiling.

In this design a central larger porcelain ring and medium sized ring anchor the vines of two smaller rings on the ends.

Vine sculptures can have at most one junction box per sculpture. 24V power must be delivered to all ceiling mounting points, either from a remote or combination driver, or from low-voltage wiring originating from the LED drivers in the canopy mounted to the junction box.


AS SHOWN ON WEBSITE

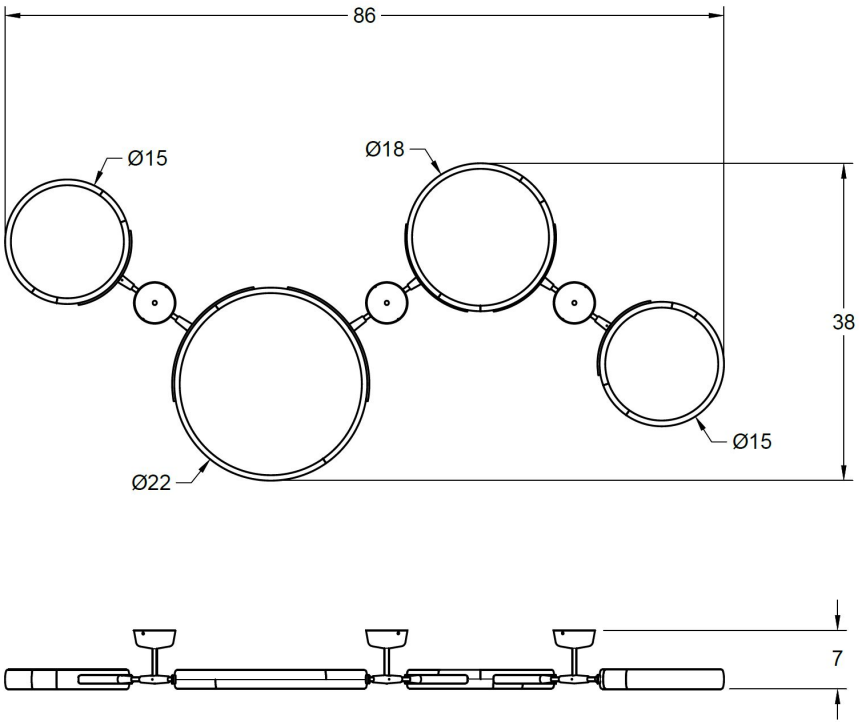

Vine - Four Rings Linear

Dimensions	86”L x 38”W x 7”H (as shown) Dimensions are customizable
Ring Sizes	22”, 18”, and 15” diameters
Light	3,200 lumens total | 660-1,050 per ring LED color accuracy 95+ CRI 2,400-5,000K color by request Bulb life 50,000 hours (17yrs at 8hrs/day) Relamping kits available
Dimming	Minimum dimming range 5% Electronic Low Voltage (see details)
Mounting	One standard junction box only. (Recommended) Wood backing behind drywall for additional mounting location(s). (Recommended) Non-junction box locations receive 24V wiring through ceiling cavity from LED drivers at junction box. Sloped ceiling by request. 28 lbs / 13 kg
Power	120V | 60W (15W per ring) 240-277V available with remote driver
LED Drivers	Integrated in canopy, or remote
UL Certification	Light ring design is UL certified; sculpture not certified
Production	Handmade in Colorado | Patents Pending Rush by request

Vine sculptures can have at most one junction box per sculpture. 24V power must be delivered to all ceiling mounting points, either from a remote or combination driver, or from low-voltage wiring originating from the LED drivers in the canopy mounted to the junction box.

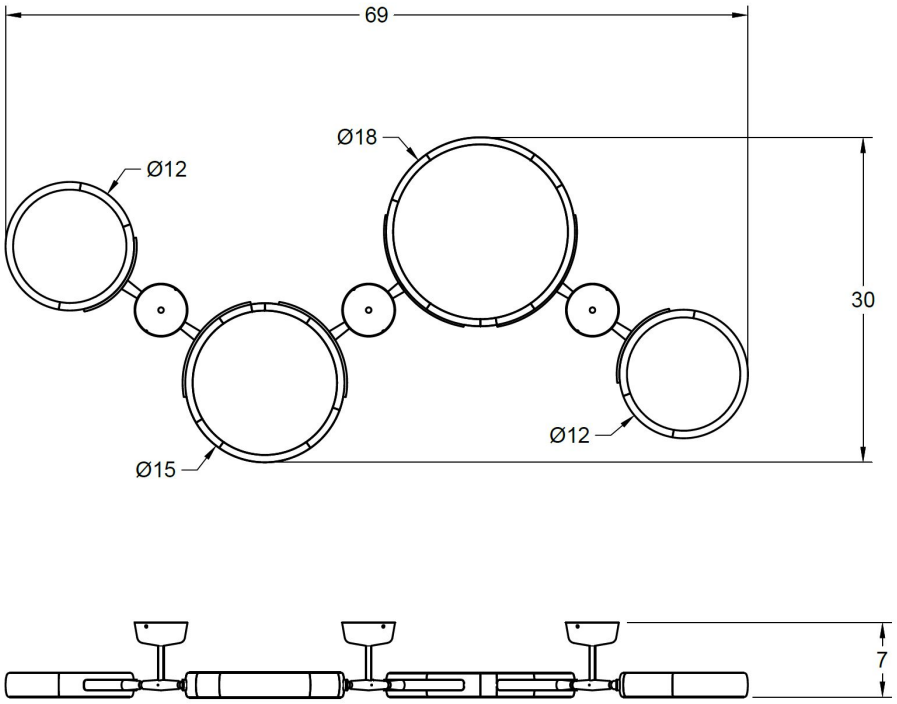

Vine - Four Rings Linear - Small

Dimensions	69”L x 30”W x 7”H (as shown) Dimensions are customizable
Ring Sizes	18”, 15”, and 12” diameters
Light	2,500 lumens total | 660-1,050 per ring LED color accuracy 95+ CRI 2,400-5,000K color by request Bulb life 50,000 hours (17yrs at 8hrs/day) Relamping kits available
Dimming	Minimum dimming range 5% Electronic Low Voltage (see details)
Mounting	One standard junction box only. (Recommended) Wood backing behind drywall for additional mounting location(s). (Recommended) Non-junction box locations receive 24V wiring through ceiling cavity from LED drivers at junction box. Sloped ceiling by request. 28 lbs / 13 kg
Power	120V | 60W (15W per ring) 240-277V available with remote driver
LED Drivers	Integrated in canopy, or remote
UL Certification	Light ring design is UL certified; sculpture not certified
Production	Handmade in Colorado | Patents Pending Rush by request