



Weighted Branch 6 Round XL

Six rings of two different sizes are balanced and opposing one another, hanging from a single stem.


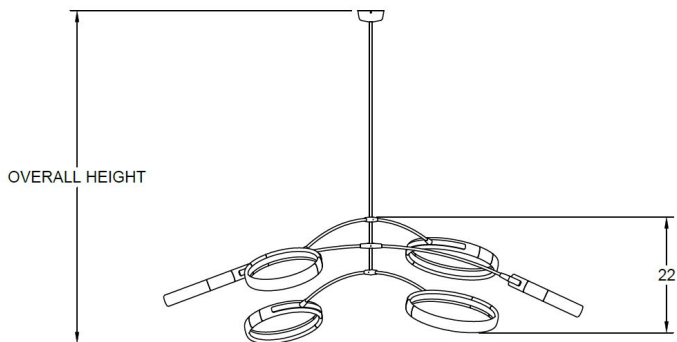


AS SHOWN ON WEBSITE

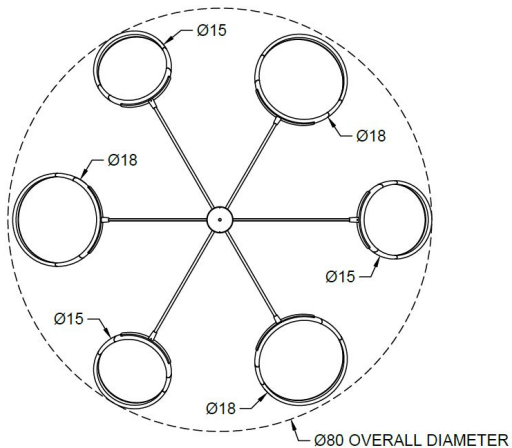


Weighted Branch 6 - Round

Dimensions	80" Diameter x 22"H (as shown) Dimensions are customizable
Minimum Height	26"
Ring Sizes	18" and 15" diameters
Light	5,300 lumens total 660-900 per ring LED color accuracy 95+ CRI 2,400-5,000K color by request Bulb life 50,000 hours (17yrs at 8hrs/day) Relamping kits available
Dimming	Minimum dimming range 5% Electronic Low Voltage (see details)
Mounting	Standard junction box 68 lbs / 31 kg Sloped ceiling by request
Power	120V 90W (15W per ring) 240-277V available with remote driver
LED Drivers	Integrated in canopy, or remote
UL Certification	Light ring design is UL certified; sculpture not certified
Production	Handmade in Colorado Patents pending Rush by request

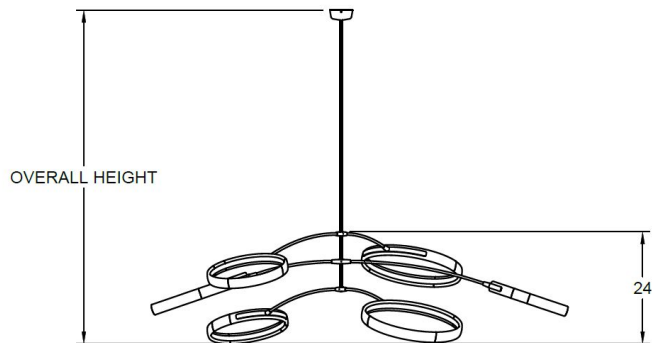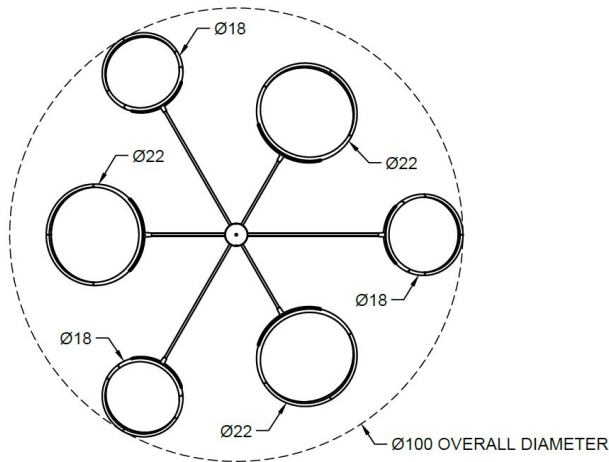



Weighted Branch 6 - Round XL

Dimensions	100" Diameter x 24"H (as shown) Dimensions are customizable
Minimum Height	28"
Ring Sizes	22" and 18" diameters
Light	5,300 lumens total 660-900 per ring LED color accuracy 95+ CRI 2,400-5,000K color by request Bulb life 50,000 hours (17yrs at 8hrs/day) Relamping kits available
Dimming	Minimum dimming range 5% Electronic Low Voltage (see details)
Mounting	Standard junction box 68 lbs / 31 kg Sloped ceiling by request
Power	120V 90W (15W per ring) 240-277V available with remote driver
LED Drivers	Integrated in canopy, or remote
UL Certification	Light ring design is UL certified; sculpture not certified
Production	Handmade in Colorado Patents pending Rush by request

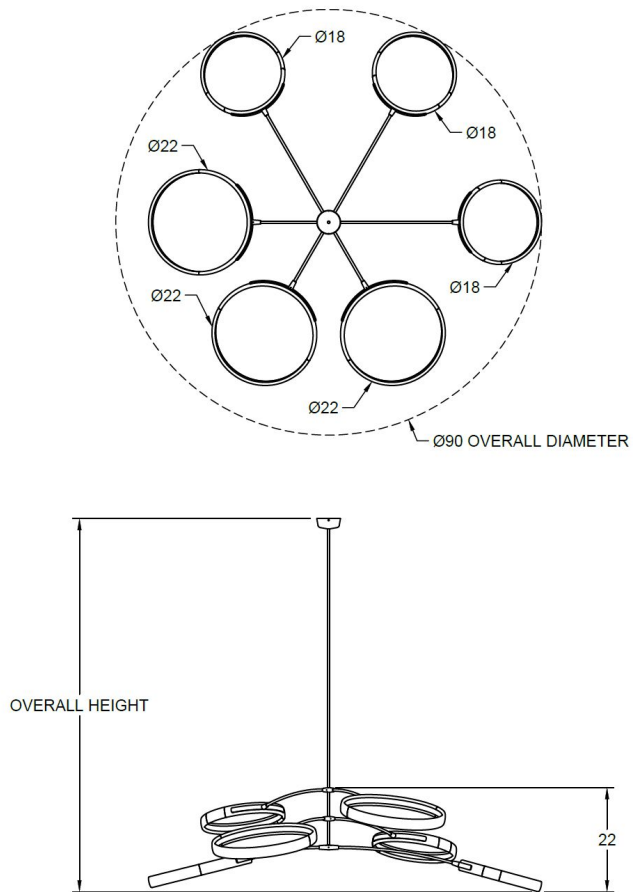

Weighted Branch 6 - Round XL Asymmetric

Dimensions	90" Diameter x 22"H (as shown) Dimensions are customizable
Minimum Height	26"
Ring Sizes	22" and 18" diameters
Light	5,300 lumens total 660-900 per ring LED color accuracy 95+ CRI 2,400-5,000K color by request Bulb life 50,000 hours (17yrs at 8hrs/day) Relamping kits available
Dimming	Minimum dimming range 5% Electronic Low Voltage (see details)
Mounting	Standard junction box 68 lbs / 31 kg Sloped ceiling by request
Power	120V 90W (15W per ring) 240-277V available with remote driver
LED Drivers	Integrated in canopy, or remote
UL Certification	Light ring design is UL certified; sculpture not certified
Production	Handmade in Colorado Patents pending Rush by request

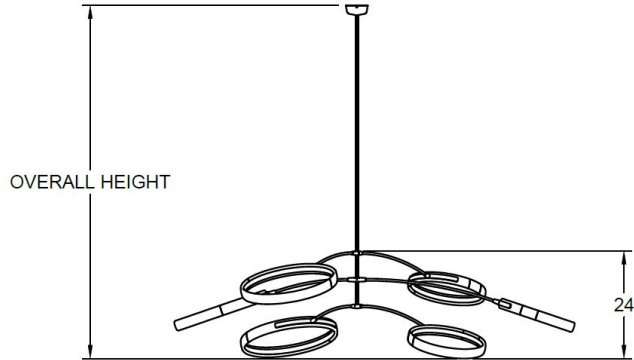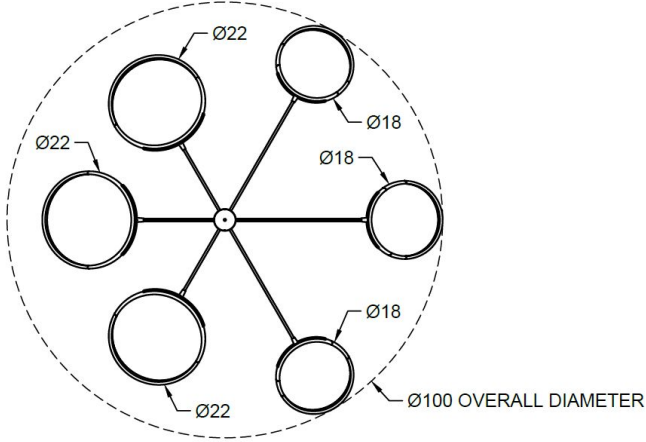

Weighted Branch 6 - Round XL Asymmetric

Dimensions	100" Diameter x 24"H (as shown) Dimensions are customizable
Minimum Height	28"
Ring Sizes	22" and 18" diameters
Light	5,300 lumens total 660-900 per ring LED color accuracy 95+ CRI 2,400-5,000K color by request Bulb life 50,000 hours (17yrs at 8hrs/day) Relamping kits available
Dimming	Minimum dimming range 5% Electronic Low Voltage (see details)
Mounting	Standard junction box 68 lbs / 31 kg Sloped ceiling by request
Power	120V 90W (15W per ring) 240-277V available with remote driver
LED Drivers	Integrated in canopy, or remote
UL Certification	Light ring design is UL certified; sculpture not certified
Production	Handmade in Colorado Patents pending Rush by request