




Weighted Branch 3

Linear

In this design, three different sized rings are balanced and opposing one another, with three independent branches.






AS SHOWN ON WEBSITE

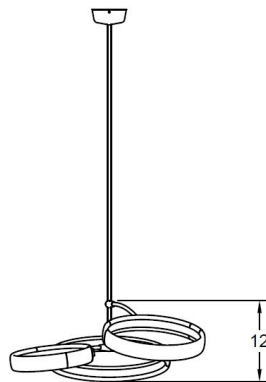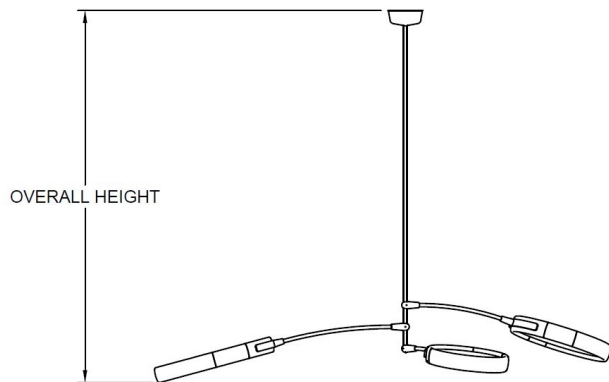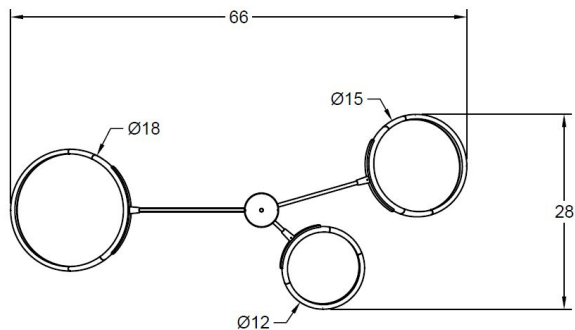

Weighted Branch 3 - Linear

Dimensions	66"L x 28"W x 12"H (as shown) Dimensions are customizable
Minimum Height	16"
Ring Sizes	18", 15", and 12" diameters
Light	2,000 lumens total 660-900 per ring LED color accuracy 95+ CRI 2,400-5,000K color by request Bulb life 50,000 hours (17yrs at 8hrs/day) Relamping kits available
Dimming	Minimum dimming range 5% Electronic Low Voltage (see details)
Mounting	Standard junction box 24 lbs / 11 kg Sloped ceiling by request
Power	120V 45W (15W per ring) 240-277V available with remote driver
LED Drivers	Integrated in canopy, or remote
UL Certification	Light ring design is UL certified; sculpture not certified
Production	Handmade in Colorado Patents pending Rush by request

AS SHOWN ON WEBSITE

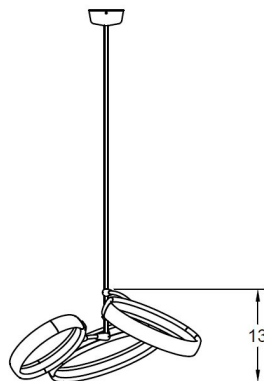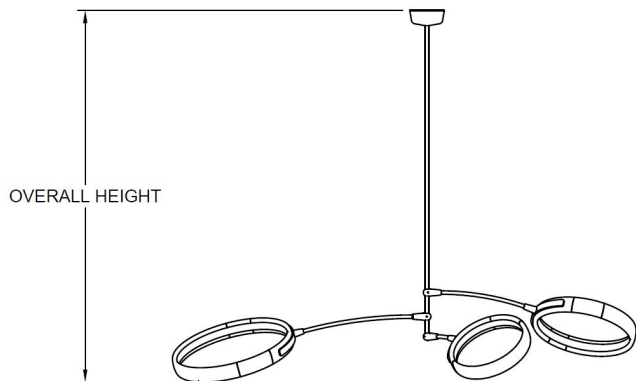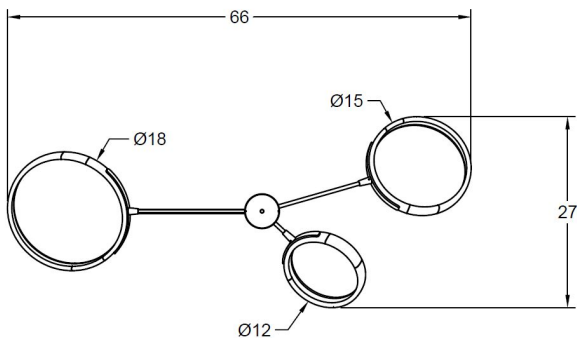

Weighted Branch 3 - Linear Nest

Dimensions	66"L x 27"W x 13"H (as shown) Dimensions are customizable
Minimum Height	17"
Ring Sizes	18", 15", and 12" diameters
Light	2,000 lumens total 660-900 per ring LED color accuracy 95+ CRI 2,400-5,000K color by request Bulb life 50,000 hours (17yrs at 8hrs/day) Relamping kits available
Dimming	Minimum dimming range 5% Electronic Low Voltage (see details)
Mounting	Standard junction box 24 lbs / 11 kg Sloped ceiling by request
Power	120V 45W (15W per ring) 240-277V available with remote driver
LED Drivers	Integrated in canopy, or remote
UL Certification	Light ring design is UL certified; sculpture not certified
Production	Handmade in Colorado Patents pending Rush by request