

## **TECHNICAL DATA SHEET**








LED Wall Pack Model :SZ-WP120/100/80W-HP-ACP (PC)


#### Advantage:


- UL & DLC certificate;
- IP65 Internal driver;
- Adjustable Power and CCT;
- Input voltage 120-277V / 120-347VAC;
- No UV or IR in the beam;
- Easy to install and operate;
- Energy saving, long lifespan;
- Light is soft and uniform, safe to eyes;
- Instant start, NO humming;
- ullet Green and eco-friendly without mercury.

#### Application:

Entrance lighting, courtyard lighting; Industrial lighting, Outdoor landscape lighting; Building, The hotel; Wall lighting area.









# 

## **TECHNICAL DATA SHEET**

### **Specifications**

Product name	LED Wall Pack	
Part No	SZ-WP120/100/80W-HP-ACP (PC)	
Dimension	288*227*125mm	

#### **Technical Characteristic**

Color temperature	Adjustable CCT:3000K/4000K/5000K			
CRI	>80			
Lumen	15600LM			
Lumen Efficacy	130LM/W			
Input Power	Adjustable Power:120W/100W/80W			
Viewing Angle	75*115 Degree			
Input Voltage	120-277VAC 50/60Hz, Optional:120-347V			
Driver model	China Brand Driver, (0-10Vdc Dimmer)			
Photocell	Yes			
PF	>0.9			
Waterproof Rating	IP65			

#### **Materials**

LED Type	2835
LED QTY	468PCS
Housing	Aluminum(ADC12) +PC
Housing color	Brown

#### Others

Operating Temperature	-40°C TO 45°C
Operating Humidity	20%-90% RH
Storage Temperature	-40°C TO 80°C
Storage Humidity	10%-95%
Application	Outdoor / Indoor
Safety Certification	UL&DLC
Warranty Time	5 Years





#### **Light Distribution Testing Parameters**

#### LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.97V I:0.8854A P:105.88W PF:0.9968 Freq:60.01Hz UTHDi:0.45% ITHDi:4.22% KDisp:0.0000 Lamp Flux:12976.5x1 lm					
NAME: SZ-WP120/100/80W-HP-ACP(PC)	TYPE:	WEIGHT:			
SPEC.: 100~277V	DIM.: 0.175*0.275	SERIAL No.:			
MFR.:	SUR.: 0.15*0.26	Shielding Angle:			

	DATA OF LA	MP		PHOTOME	TRIC DATA Eff: 12	2.55 lm/W
MODEL	SZ-WP120/100/80W		Imax (cd)	6156	S/MH (C0/180)	1.33
NOMINAL	POWER (W)	120	LOR (%)	100.0	S/MH (C90/270)	2.76
RATED VO	OLTAGE (V)	120	TOTAL FLUX(lm)	12977	η UP, DN (C0-180)	1.6,14.1
NOMINAL	FLUX(lm)	12976.5	CIE CLASS	SEMI-D.	η UP, DN (C180-360)	12.7,71.0
LAMPS IN	NSIDE	1	η up(%)	14.3	CIBSE SHR NOM	1.50
TEST VOLTAGE (V) 120		η down (%)	85.7	CIBSE SHR MAX	1.50	

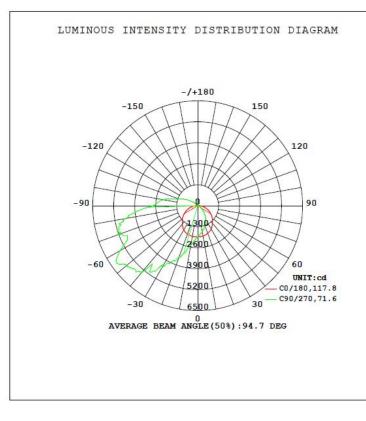

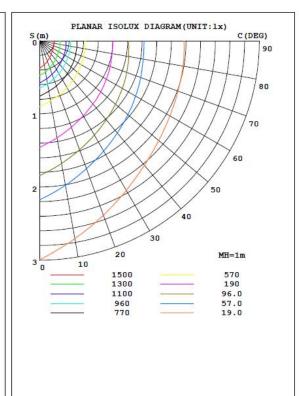

#### Package

Model	Net Weight	Size	Qty/Carton	Weight/Carton
SZ-WP120/100/80W-HP-ACP (PC)	3.6KG	301*169*418MM	2	4.4KG