

LED Bollard Light



Advantage:

- UL & DLC certificate;
- IP65 Internal driver;
- Adjustable CCT and Power;
- Input voltage 120-277VAC / 120-347VAC;
- Light is soft and uniform, safe to eyes;
- 0-10V dimming..


Application:

industrial parks;
schools and universities;
public transit and airports;
office buildings and medical facilities, etc.




DIMENSION:


SZ-BL24W01-X-ACP




SZ-BL24W02-X-ACP




SZ-BL24W03-X-ACP




SZ-BL24W04-X-ACP



SZ-BL24W05-X-ACP



SZ-BL24W06-X-ACP



The Top Heads
Are Interchangeable:



Specifications

Product name	LED Bollard Light
Model	SZ-BL24WXX-P-ACP

Technical Characteristic

Color temperature	Adjustable CCT:3000K/4000K/5000K
CRI	>70
Lumen	3360LM
Lumen Efficacy	140LM/W
Input Power	Adjustable Power:14W/19W/24W
Viewing Angle	150°
Input Voltage	120-277VAC 50/60Hz, Optional:120-347V
Driver model	China Brand Driver, 0-10V dimmer
Photocell	Yes
PF	>0.9
Waterproof Rating	IP65

Materials


LED Type	2835
Housing	Aluminum(ADC12) +PC
Housing color	Brown

Others

Operating Temperature	-20℃ TO 45℃
Storage Temperature	-30℃ TO 45℃
Storage Humidity	10%-95%
Application	Outdoor
Safety Certification	UL & DLC
Warranty Time	5 Years

Package


Model	SZ-BL24W01-P-ACP	SZ-BL24W02-P-ACP	SZ-BL24W03-P-ACP	SZ-BL24W04-P-ACP	SZ-BL24W05-P-ACP	SZ-BL24W06-P-ACP
Size	204*204*305mm	204*204*387mm	204*204*387mm	204*204*365mm	204*204*365mm	290*290*382mm
QTY/CTN	1	1	1	1	1	1
N. W	2.58Kg	2.04Kg	1.9Kg	2.22Kg	2.41Kg	2.59Kg
G. W	2.98Kg	2.34Kg	2.2Kg	2.52Kg	2.71Kg	2.9Kg

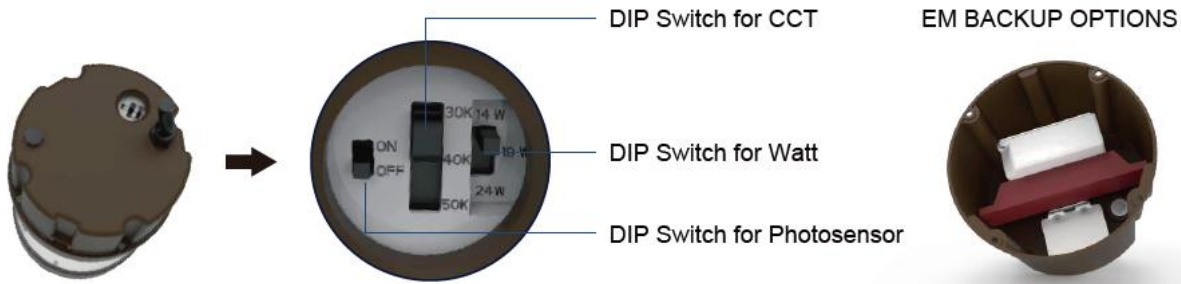


Light Distribution Testing Parameters

PHOTOMETRICS:

SZ-BL24W01-P-ACP

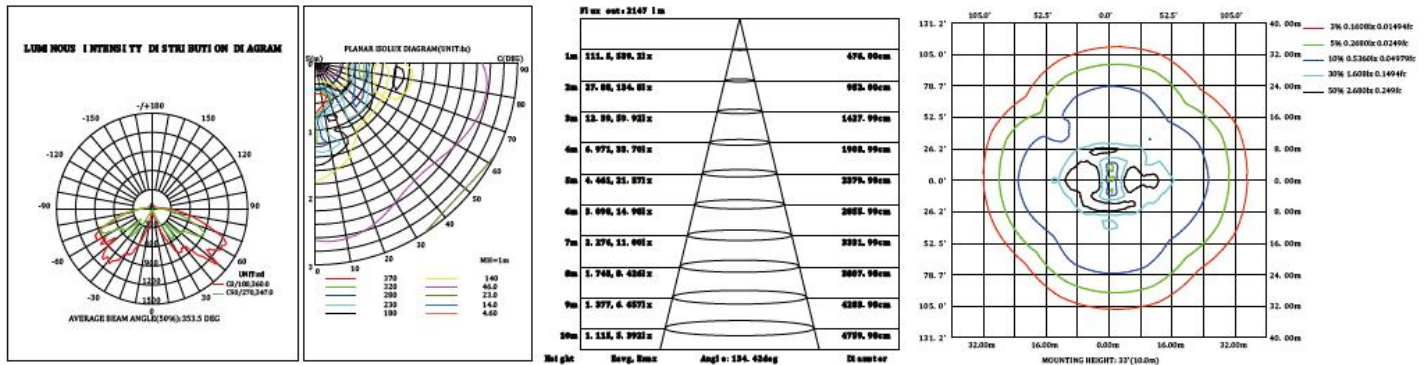

SZ-BL24W02-P-ACP

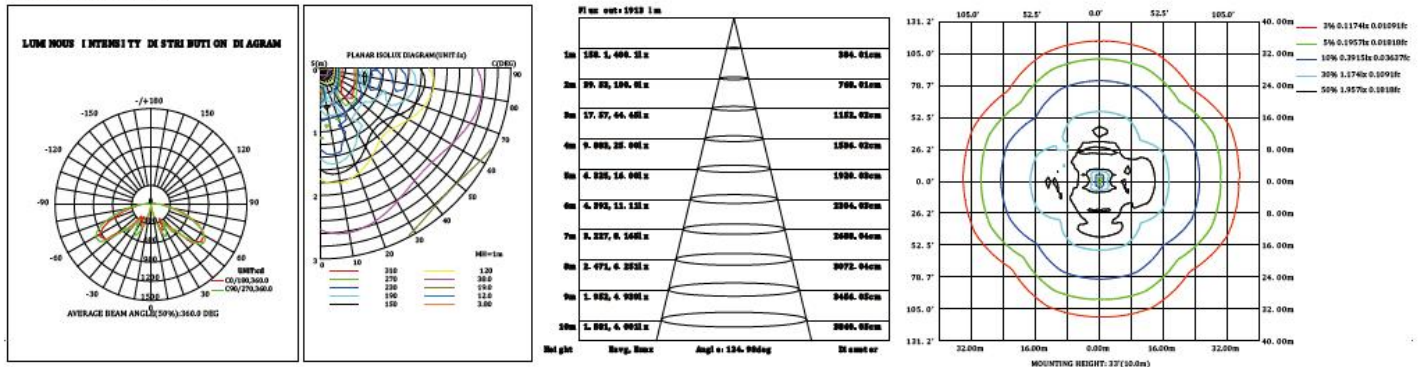

SZ-BL24W03-P-ACP]

