

DATASHEET

RID 200 S-SERIES DIESEL GENERATOR 200 KVA




symbolic image



RID 200 S-SERIES S DIESEL GENERATOR 200 KVA



symbolic image

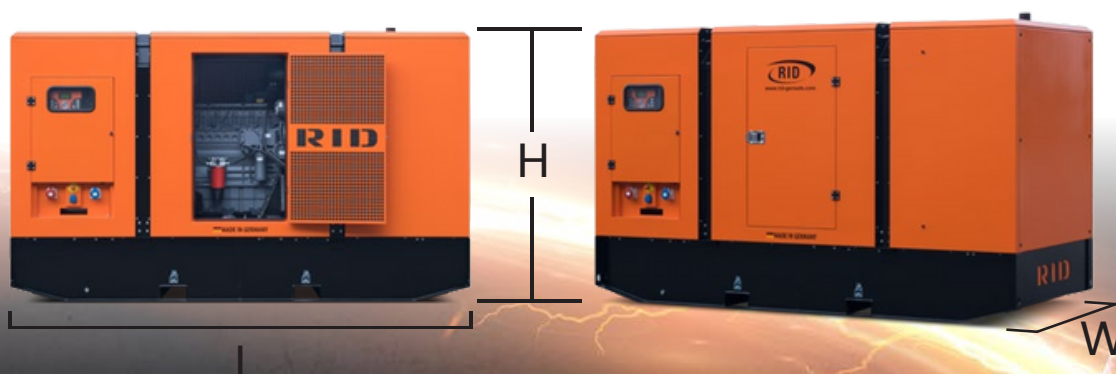

Power rating

Output power	
Power	200 kVA 160 kW
Current	288,6 A 230,9 A
Voltage	230 / 400 V
Frequency	50 Hz
Power factor	0,8 cos φ

Product overview

Order number open	713363	
Order number closed	713364	
Alternator model	Linz PRO28S B/4	LeroySomer TAL 044 M
Engine type	DEUTZ BF6M1013FC	
Generator type	synchronous	
Control panel	RID 3000-A	
CE certified in accordance with Machinery Directive 2006/42/EC		

Dimensions and weights Generator

	Länge (L)	Breite (B)	Höhe (H)	Gewicht	Tank
Open	2540 mm	1050 mm	1845 mm	2070 kg	500 l
Closed	3350 mm	1430 mm	2114 mm	2500 kg	750 l

Noise level

	1 Meter	4 Meter	7 Meter	10 Meter
Open	85 dB(A)	84 dB(A)	83 dB(A)	82 dB(A)
Closed	77 dB(A)	72 dB(A)	69 dB(A)	67 dB(A)

Fuel consumption

	25% load	50% load	75% load	100% load
Consumption	12,2 l/h	23,0 l/h	34,2 l/h	46,5 l/h

Engine technical data

Engine output	183 kW
Engine type	DEUTZ BF6M1013FC
Engine size	6-Cylinder, in-line
Rotational-speed range	1500 u/min
Speed regulation	electricial
Displacement	7,2 l
Engine w/o cooling system	708 kg

Alternator data

Alternator model	Linz PRO28S B/4	LeroySomer TAL 044 M
Insulation Class	H	
Regulation type	AVR	
Execution	brushless	
Protection class	IP 23	
Airflow Requirement	1920 m ³ /h	1044 m ³ /h

Intake and exhaust system

Silencer type	industrial
Max. exhaust gas temperature	560 °C
Exhaust gas flow	2112 m³/h
Max. exhaust back pressure	30 mbar
Air filter type	replaceable element

Engine lubrication

Oil type	RID 10W30
Oil filter type	replaceable element
Total oil volume	20 l
Max. oil temperature	130 °C

Engine cooling

Cooling system	water + air
Cooling system capacity	27,3 l
Fan power consumption	7,2 kW
Cooling air flow	11520 m³/h

Controller RID 3000-A



Functions

Current	Battery voltage	Operating hours counter
Frequency	Power (kVA-kW)	Rotational-speed range
Voltage	Power factor Cosφ.	Fuel level (%)

Commands and other

- Four operating modes: OFF – Manual Start – Automatic Start – Automatic Test
- Push button to force the mains contactor or the generator contactor
- Push buttons: Start/Stop, Error Reset, Up/Down/Side Selection/Enter
- Remote start possible
- Audible alarm
- Protective functions with shutdown
- Engine protection: low fuel level, low oil pressure, high engine temperature
- Generator protection: undervoltage/overvoltage, overload, battery undervoltage/overvoltage, battery charger failure
- Protocols: GSM, Ethernet, Modbus, Canbus