


DATASHEET

RID 2250 E-SERIES DIESEL GENERATOR 2250 KVA



symbolic image

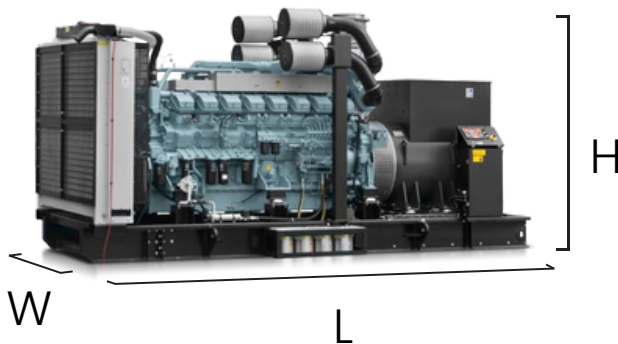

RID 2250 E-SERIES S DIESEL GENERATOR 2250 KVA



symbolic image



Power rating

Output power	
Power	2250 kVA 1800 kW
Current	3247 A 2598 A
Voltage	230 / 400 V
Frequency	50 Hz
Power factor	0,8 cos φ

Product overview

Order number open	713597
Order number closed	713598
Alternator model	LeroySomer LSA 52.3 L9
Engine type	MITSUBISHI - S16R2-PTAW
Generator type	synchronous
Control panel	RID 3000-A
CE certified in accordance with Machinery Directive 2006/42/EC	

Dimensions and weights Generator

	Length (L)	Width (W)	Height (H)	Weight	Tank
Open	6170 mm	2200 mm	2700 mm	16500 kg	1000 l
Closed	12192 mm	2438 mm	2591 mm	19500 kg	1000 l

Noise level

	1 Meter	4 Meter	7 Meter	10 Meter
Open	114 dB(A)	110 dB(A)	105 dB(A)	101 dB(A)
Closed	81 dB(A)	76 dB(A)	73 dB(A)	71 dB(A)

Fuel consumption

	25% load	50% load	75% load	100% load
Consumption	-	241 l/h	350 l/h	470 l/h

Engine technical data

Engine output	1800 kW
Engine type	MITSUBISHI - S16R2-PTAW
Engine size	16 -Cylinder
Rotational-speed range	1500 u/min
Speed regulation	electricial
Displacement	79,9 l
Engine w/o cooling system	8200 kg

Alternator data

Alternator model	LeroySomer LSA 52.3 L9
Insulation Class	H
Regulation type	AVR
Execution	-
Protection class	IP 23
Airflow Requirement	9000 m ³ /h

Intake and exhaust system

Silencer type	industrial
Max. exhaust gas temperature	-
Exhaust gas flow	29880 m³/h
Max. exhaust back pressure	58,8 mbar
Air filter type	replaceable element

Engine lubrication

Oil type	RID 10W40
Oil filter type	replaceable element
Total oil volume	260 l
Max. oil temperature	-

Engine cooling

Cooling system	water + air
Cooling system capacity	19,7 l
Fan power consumption	61 kW
Cooling air flow	99000 m³/h

Controller RID 3000-A



Functions

Current	Battery voltage	Operating hours counter
Frequency	Power (kVA-kW)	Rotational-speed range
Voltage	Power factor Cosφ.	Fuel level (%)

Commands and other

- Four operating modes: OFF – Manual Start – Automatic Start – Automatic Test
- Push button to force the mains contactor or the generator contactor
- Push buttons: Start/Stop, Error Reset, Up/Down/Side Selection/Enter
- Remote start possible
- Audible alarm
- Protective functions with shutdown
- Engine protection: low fuel level, low oil pressure, high engine temperature
- Generator protection: undervoltage/overvoltage, overload, battery undervoltage/overvoltage, battery charger failure
- Protocols: GSM, Ethernet, Modbus, Canbus