


DATASHEET

RID 400 B-SERIES

DIESEL GENERATOR 400 KVA



symbolic image

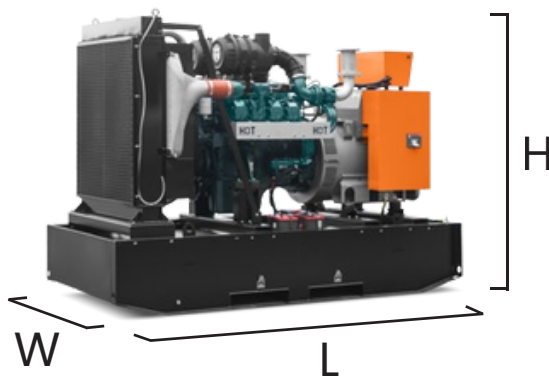

RID 400 B-SERIES S

DIESEL GENERATOR 400 KVA



symbolic image



Power rating

Output power	
Power	400 kVA 320 kW
Current	577,3 A 461,8 A
Voltage	230 / 400 V
Frequency	50 Hz
Power factor	0,8 cos φ

Product overview

Order number open	713711	
Order number closed	713712	
Alternator model	Linz PRO28L G/4	LeroySomer TAL 047 A
Engine type	Hyundai P158LE	
Generator type	synchronous	
Control panel	RID 3000-A	
CE certified in accordance with Machinery Directive 2006/42/EC		

Dimensions and weights Generator

	Length (L)	Width (W)	Height (H)	Weight	Tank
Open	2080 mm	1614 mm	2224 mm	3150 kg	1000 l
Closed	4000 mm	1940 mm	2425 mm	4370 kg	1000 l

Noise level

	1 Meter	4 Meter	7 Meter	10 Meter
Open	84 dB(A)	83 dB(A)	82 dB(A)	81 dB(A)
Closed	77,3 dB(A)	72,6 dB(A)	70,9 dB(A)	68,8 dB(A)

Fuel consumption

	25% load	50% load	75% load	100% load
Consumption	23,7 l/h	43,9 l/h	65,1 l/h	89,3 l/h

Engine technical data

Engine output	363 kW
Engine type	Hyundai - PI58LE
Engine size	8-Cylinder, V
Rotational-speed range	1500 u/min
Speed regulation	electricial
Displacement	14,62 l
Engine w/o cooling system	950 kg

Alternator data

Alternator model	Linz PRO28L G/4	LeroySomer TAL 047 A
Insulation Class	H	
Regulation type	AVR	
Execution	brushless	
Protection class	IP 23	
Airflow Requirement	2664 m ³ /h	3240 m ³ /h

Intake and exhaust system

Silencer type	industrial
Max. exhaust gas temperature	580 °C
Exhaust gas flow	4698 m³/h
Max. exhaust back pressure	59 mbar
Air filter type	replaceable element

Engine lubrication

Oil type	RID 10W30
Oil filter type	replaceable element
Total oil volume	21 l
Max. oil temperature	120 °C

Engine cooling

Cooling system	water + air
Cooling system capacity	80 l
Fan power consumption	14 kW
Cooling air flow	31320 m³/h

Controller RID 3000-A



Functions

Current	Battery voltage	Operating hours counter
Frequency	Power (kVA-kW)	Rotational-speed range
Voltage	Power factor Cosφ.	Fuel level (%)

Commands and other

- Four operating modes: OFF – Manual Start – Automatic Start – Automatic Test
- Push button to force the mains contactor or the generator contactor
- Push buttons: Start/Stop, Error Reset, Up/Down/Side Selection/Enter
- Remote start possible
- Audible alarm
- Protective functions with shutdown
- Engine protection: low fuel level, low oil pressure, high engine temperature
- Generator protection: undervoltage/overvoltage, overload, battery undervoltage/overvoltage, battery charger failure
- Protocols: GSM, Ethernet, Modbus, Canbus