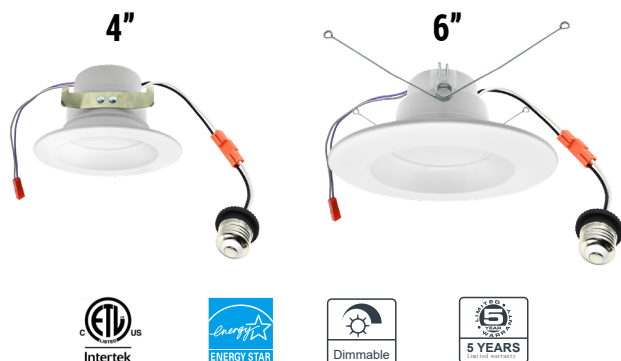


## LED Retrofit Down Lights



### MODEL SPECIFICATION

| MODEL:             | SIZE  | WATTAGE     | 5CCT  | LUMEN           |
|--------------------|-------|-------------|-------|-----------------|
| SZ-DL12W4-ACP-277V | 4inch | 6W/9W/12W   | 2700K | 500-750-1000lm  |
|                    |       |             | 3000K |                 |
|                    |       |             | 3500K |                 |
|                    |       |             | 4000K |                 |
|                    |       |             | 5000K |                 |
| MODEL:             | SIZE  | WATTAGE     | 5CCT  | LUMENS          |
| SZ-DL18W6-ACP-277V | 6inch | 10W/14W/18W | 2700K | 800-1200-1500lm |
|                    |       |             | 3000K |                 |
|                    |       |             | 3500K |                 |
|                    |       |             | 4000K |                 |
|                    |       |             | 5000K |                 |

### DESCRIPTION

PC driver housing and Aluminum reflector with architectural white finish.  
 Easy clip-in to existing can housing.  
 Features color tunable technology lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.  
 3 levels of adjustable wattage.  
 Damp-location rated, ideal for residential housings, hotels, corridors, home decoration, shopping malls, schools.

### TECHNICAL SPECIFICATION

|                 |                                       |
|-----------------|---------------------------------------|
| VOLTAGE         | 120-277V                              |
| POWER FREQUENCY | 60Hz                                  |
| POWER FACTOR    | >0.9                                  |
| 5CCT            | 2700K   3000K   3500K   4000K   5000K |
| CRI             | 90                                    |
| BEAM ANGLE      | 100°                                  |
| MATERIAL        | AL+PC                                 |
| COLOR           | White                                 |
| LIFESPAN        | ≥ 50,000hours                         |
| OPERATING TEMP  | (-4°F~ 113°F) -20~45 °C               |
| DIMMABLE        | 0-10V                                 |
| RATING          | Suitable for Damp Locations           |
| WARRANTY        | 5 year limited                        |

### FEATURES

- Emits evenly, without halo or shadows.
- Continuous dimming from 100% to 0% with many 0-10V Dimmers
- Smooth finish

### INSTALLATION

Fit in 4 , 5/6 inch compatible housing cans directly, no additional accessories are required.

### DIMMING

Compatible with most 0-10V dimmers to give user a smooth 100%-0% dimming to choose the desired brightness. Please check the recommended dimmer list in next page.

### ELECTRICAL

This fixture is built with the highest quality 120-277V Driver, ensuring energy efficiency.

### ENERGY SAVINGS

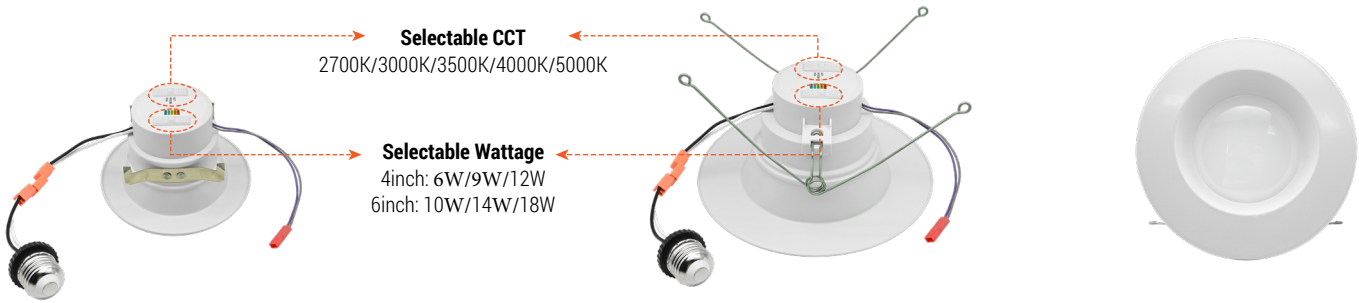
80% more energy savings than halogen lamps.

### LISTING





ETL Listed.Energy Star.Title24.

# LED Retrofit Down Lights

## Selectable CCT & Wattage



## SIZE & DIMENSION & HOUSING CANS

| Size  | Dimension                                                                                                                                                                | Housing Cans                                                                                             |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|
| 4inch |     | <br>4" housing cans  |
| 6inch |   | <br>6" housing cans |

## RECOMMENDED DIMMER

## ACCESSORIES

| LUTRON       |            | LEGRAND   |
|--------------|------------|-----------|
| RMJS-8T-DV-B | MS-Z101-WH | RH4FBL3PW |
| Diva DVSTV   | DVSTV-WH   |           |



E26 Adapter