


Ashbury 580




Floor plan

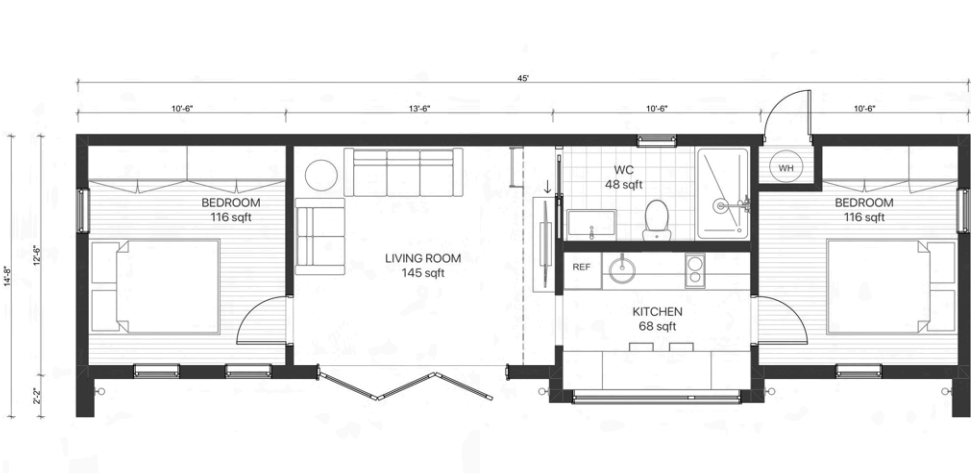

The Ashbury 580 features two fully separate bedrooms and a spacious living room that maximize usability. This prefab ADU offers 683 square ft of thoughtfully designed interior space, featuring a striking pitched-roof silhouette, expansive windows, and a spacious mezzanine that adds versatile loft living.

Premium finishes and a warm, modern aesthetic make it a standout addition to any property.

Section

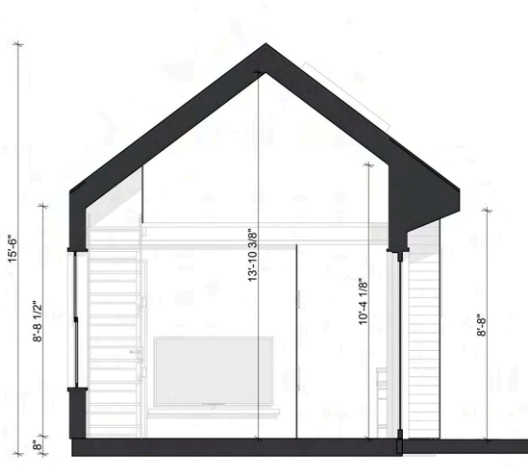

Interior area: 493 sqft + 190 sqft mezzanine

	Interior	Exterior
Height	13'-10" max	15'-6" max
Length	44'-0"	45'-0"
Depth	11'-8"	14'-8"

Inside Ashbury 580



Finishes

- Painted walls
- Laminate flooring (color options available)

Kitchen


- Tile kitchen backsplash (tile options available)
- Premium kitchen cabinets (options available)

Bathroom Finishes

- Painted walls
- Tile floor and shower (color options available)

Bathroom

- Toilet, bathtub, vanity

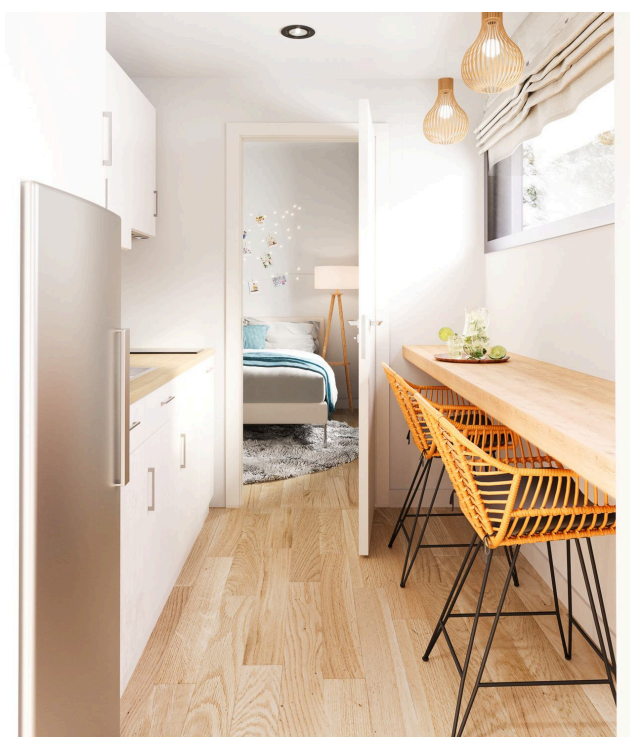

Structure

Foundation	Concrete slab on grade foundation
Walls	2x6 LVL studs with sound-reducing stone wool insulation
Roof	2x10 TJI rafters with sound-reducing stone wool and rigid insulation
Windows	Marvin fiberglass windows, double pane tempered Low E glass
Skylights (for Ashbury models only)	Two Marvin manually operable skylights (Ashbury 250 and Ashbury 330) Three Marvin manually operable skylights (Ashbury 440 and Ashbury 580)
Exterior Door	Marvin fiberglass Swing or Bifold door
Interior Doors	Swing doors

Finishes

Front facade	Red cedar rainscreen system (color options available)
Sides and back	Black corrugated metal
Roofing	Peel and stick roll roofing. Grey color
Flooring living room	Engineered wood floor planks (color options available)
Flooring bathroom	Tile floor (color options available)
Wall living room, bedroom	Premium white paint
Wall bathroom	Tile shower and painted walls
Interior ceiling	Premium white paint
Baseboard and trims	Wood, painted dark grey

Interior finishes

Bathroom	Toilet, shower and vanity
Kitchen	Sink, fridge, cooktop

Technical

Electrical wiring	20 AMP wiring
Breaker box	100 AMP subpanel
Utility lines	Up to 50 linear feet of electrical, water and sewer lines to the main house
Exterior lighting	Sconce lights on the main facade
Interior lighting	Can lights in the ceiling, dimmable
Heating and cooling	Heat Pump System with WiFi thermostat
Water heater	Hybrid 40 gallon water heater

* Subject to change without notice. Contact Wellmade for most current product information. Holds 5-year limited warranty if installed by Wellmade.

Step 1 – Initial call and virtual site visit

After an introductory call with our team, we'll do a Virtual Site Visit to verify your site conditions, talk about placement of the Shed onsite and discuss any logistical considerations.

Step 2 – Feasibility

We'll put our team to work to discover any potential show-stoppers for the project. We'll verify that your ADU project is reasonably feasible.

Step 3 – Pricing

Wellmade has a fixed-price policy. As such, we're going to put in the work to fully understand all of the necessary aspects of the project and their costs before sending you a contract. This pricing exercise costs \$700 and will be deducted from your purchase if you decide to move forward.

Step 4 – Contract Signed and Permit Started

As soon as the contract is signed, we'll start working on a building permit package for you. During the permit work, we'll also work with you to finalize design details like color, materials, and appliance selections.

* Usually, any county is obligated to issue ADU building permit within 8 weeks.

Step 5 – Fabrication and Installation

When we get an approved building permit, we'll start fabricating your ADU. We will make all structural panels and other components in our facility, which will significantly reduce the amount of construction time onsite.

Process timeline:

Building permit	Fabrication at our facility	Installation on-site
8 - 16 weeks		6 - 10 weeks
	10 - 18 weeks	
● Sending all documents to the local authorities to obtain building permit, and addressing all comments from the city if needed.	● Manufacturing all panels at our facility ● Ordering custom elements ● Preparing for installation onsite	● Preparing site ● Doing concrete work for foundation ● Installing structural panels ● Finishing interior ● Installing appliances and fixtures * Timeline depends onsite conditions and local inspections.