




The FFTS-M2F Series Connection Cabinets offer quick connection to a mobile generator, allowing temporary power to be received quickly and safely. These units are equipped with a fused manual transfer switch and are available with optional indicating lights, providing a quick visual status on normal/emergency supply selection. Additionally, these units are equipped with mechanical lugs, allowing for easy connection. Assemblies are available with up to 4000A mains and are certified to cULus standards.

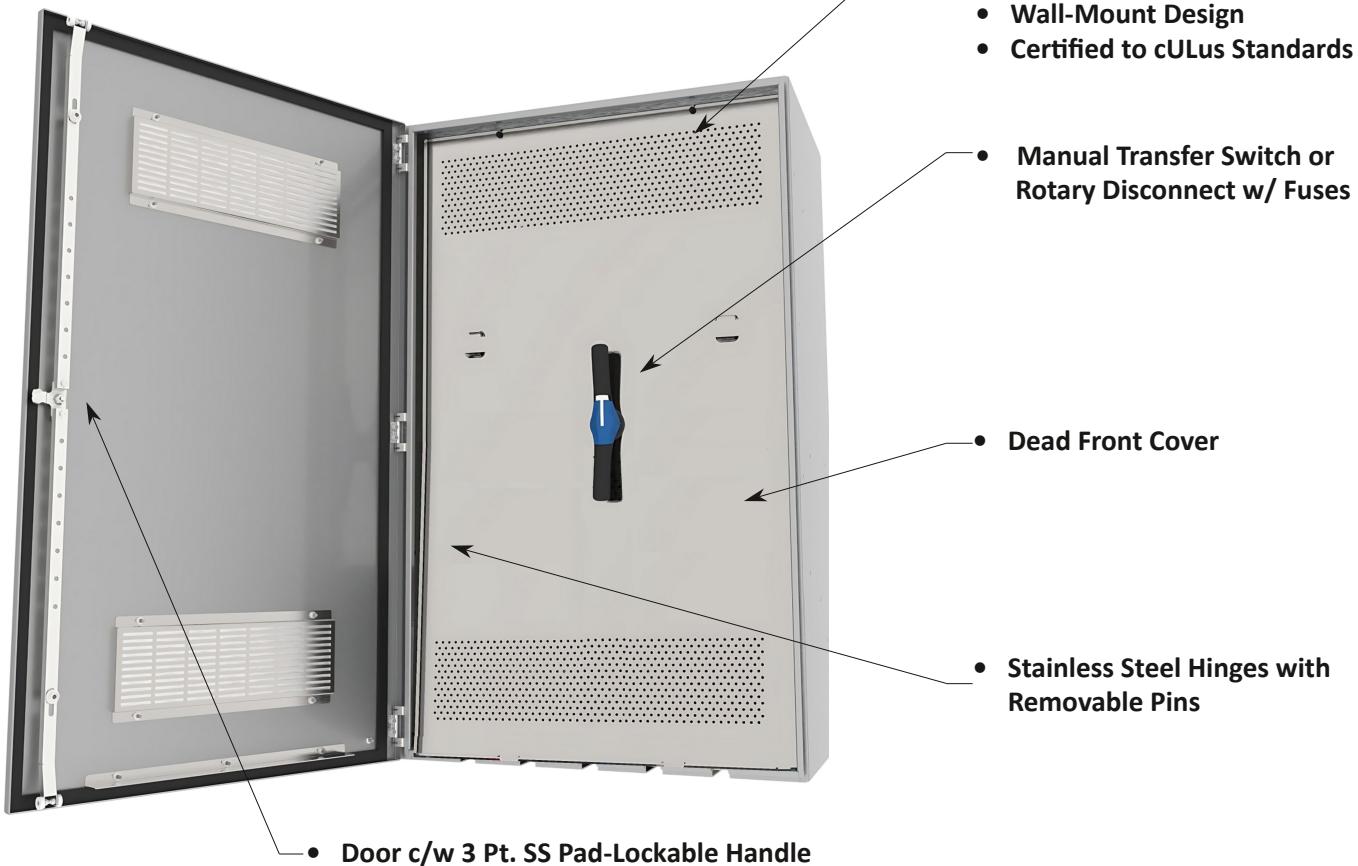

- 5052 Aluminum Construction
- Type 3R Weatherproof Enclosure
- Fully Welded Construction
- Wall-Mount Design
- Certified to cULus Standards

- Manual Transfer Switch or
Rotary Disconnect w/ Fuses


- Dead Front Cover

- Stainless Steel Hinges with
Removable Pins

- Door c/w 3 Pt. SS Pad-Lockable Handle




One-Line Diagram

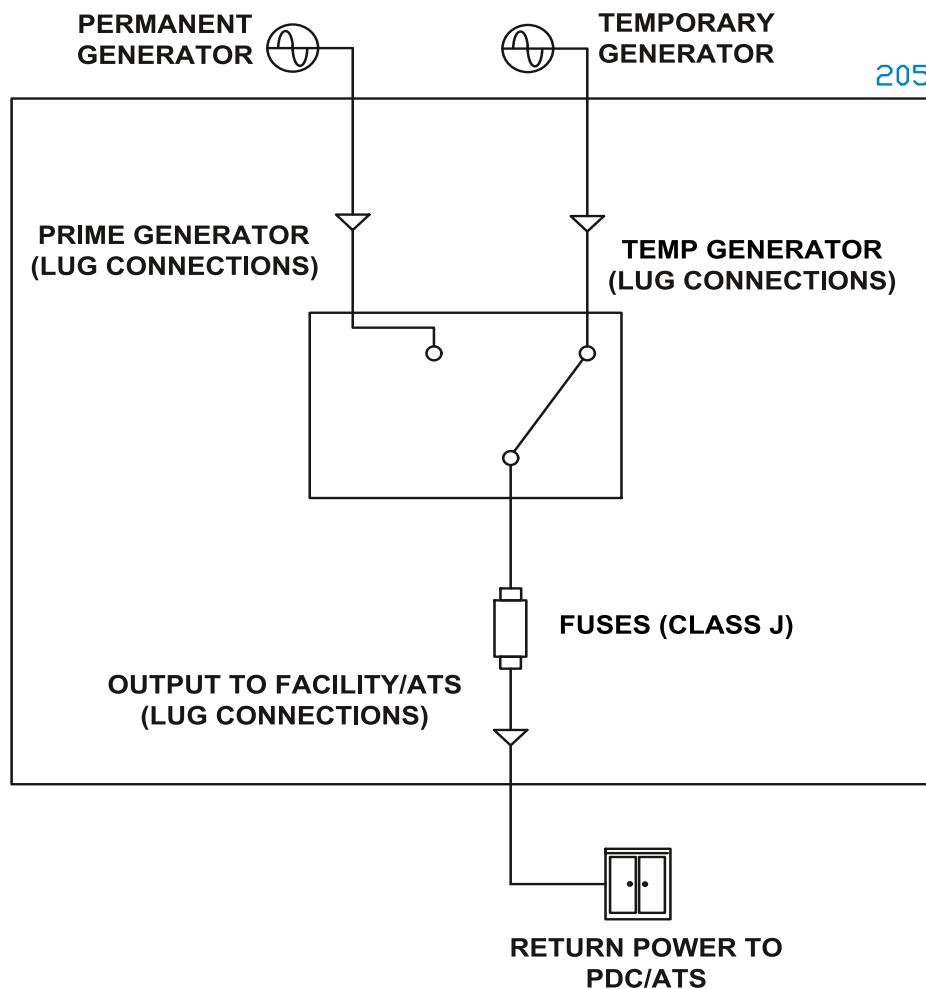

**FUSED ROTARY MANUAL
TRANSFER SWITCH**



Product Selector

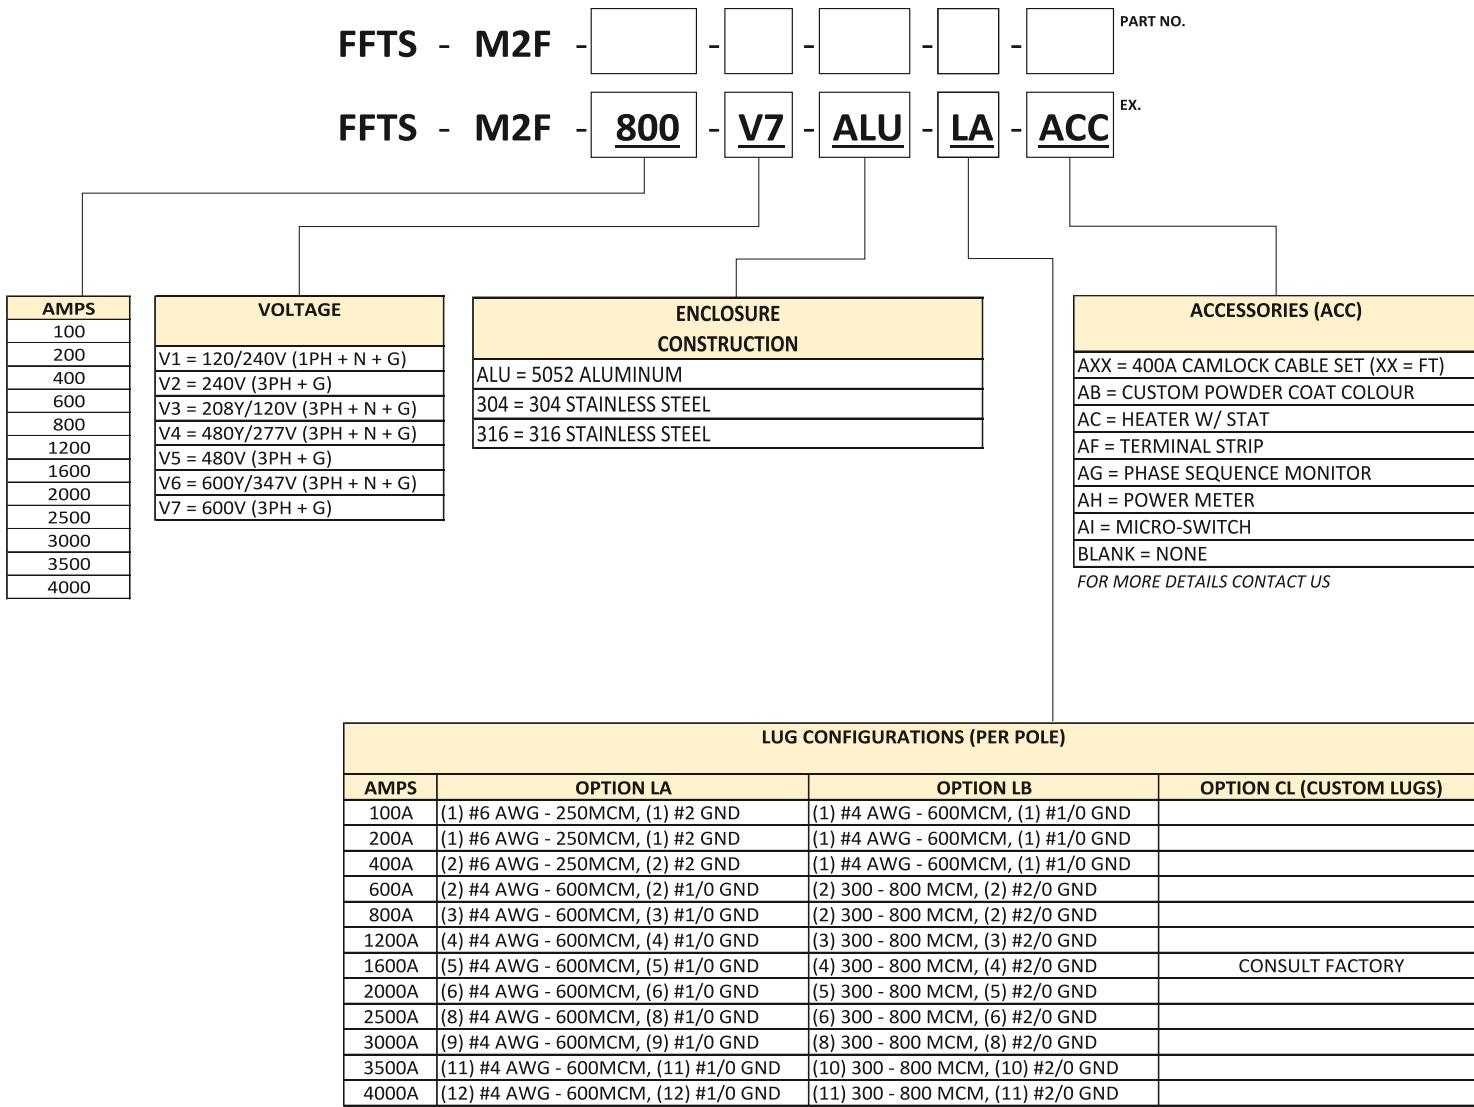

Max Ratings

- 4000A
- 600VAC

Dimensions & Est. Weights

• 36"H x 24"W x 12"D (200A)	3P&4P	TBD
• 48"H x 36"W x 20"D (201A - 400A)	3P&4P	TBD
• 60"H x 36"W x 24"D (401A - 800A)	3P&4P	380LB
• 72"H x 36"W x 30"D (801A - 1200A)	3P&4P	TBD
• 90"H x 36"W x 30"D (1201A - 1600A)	3P&4P	TBD
• 90"H x 75"W x 30"D (1600A - 3000A) BoltSW	3P	TBD
• 90"H x 100"W x 36"D (1600A - 3000A) BoltSW	4P	TBD
• 90"H x 100"W x 36"D (4000A) BoltSW	3P	TBD