


Connection Cabinets

FFCC-P2 (Dual) Series



The FFCC-P2 Series Connection Cabinets offer quick connection to a mobile generator or load bank. They can be penetrated from the top, bottom or sides to allow for facility wiring. These units are equipped with colour coded camlock receptacles allowing for easy connection and also two molded case breakers or switches. Additionally, units can be assembled for service entrance applications. Assemblies are available with up to 4000A mains and are certified to cULus standards.

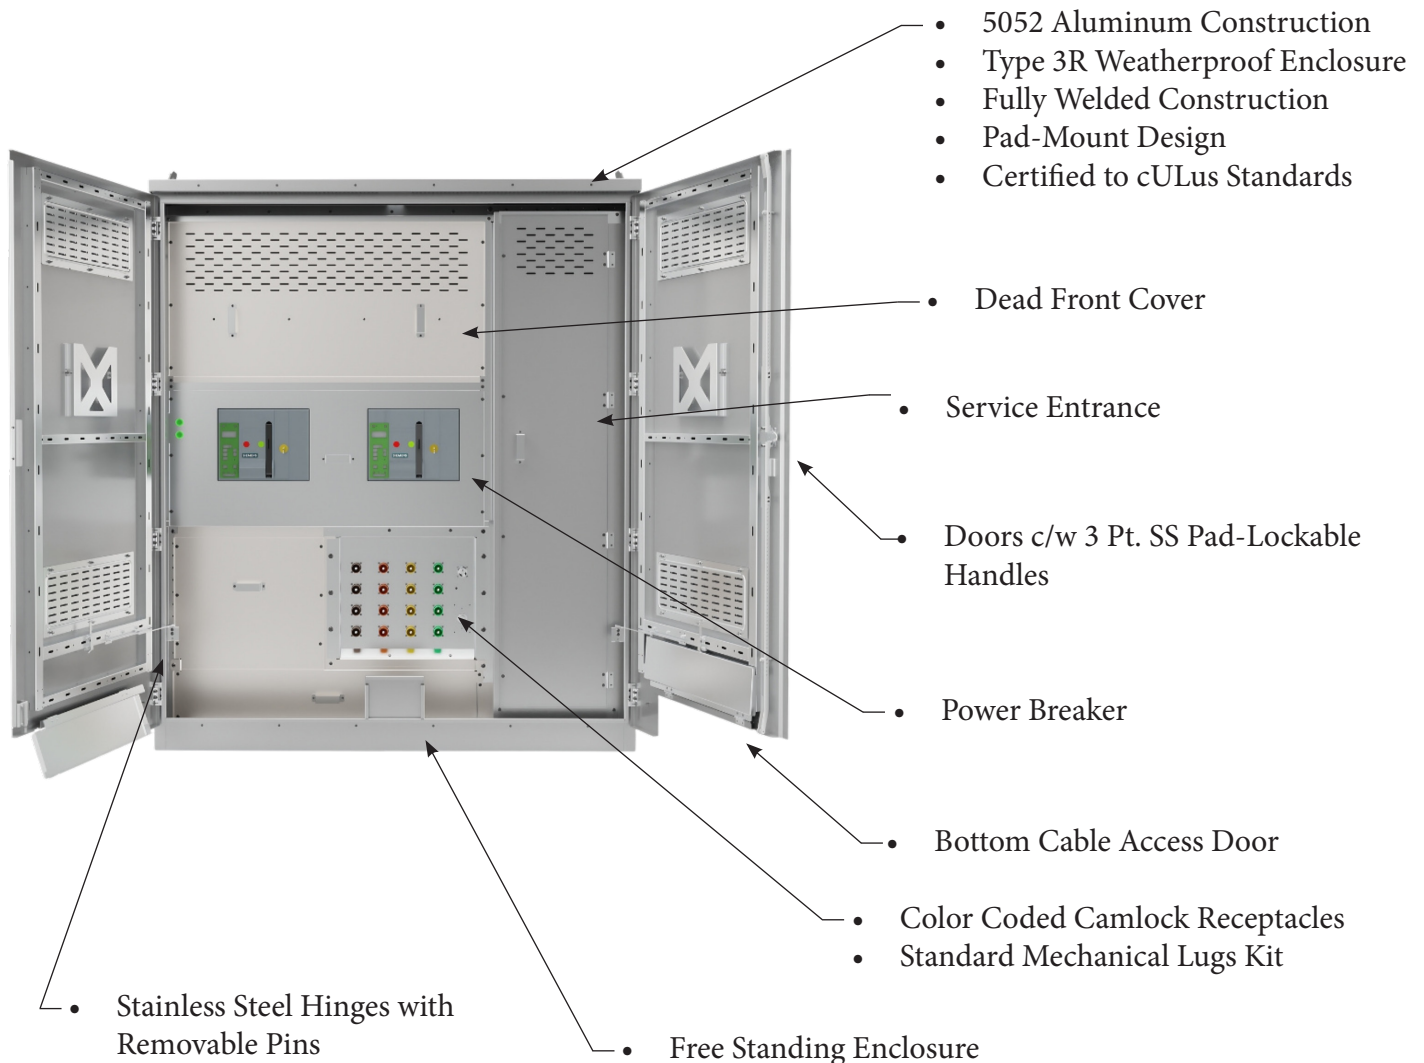

Rev 3.3

Foxfab Power Solutions


#102, 18725 - 25th Ave, Surrey, BC Canada, V3Z 2A1 Toll Free: (877) 468-0305 Email: Quotes@foxfab.com

Connection Cabinets


FFCC-P2 (Dual) Series




One-Line Diagram

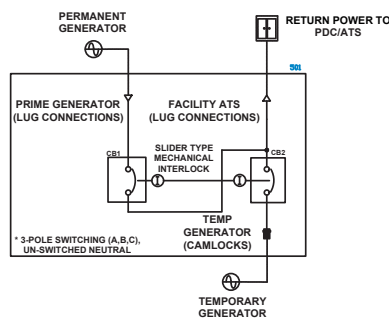


DUAL BREAKER DOCKING STATION -
TEMPORARY GENERATOR CONNECTION WITH
SLIDER TYPE INTERLOCKED CIRCUIT BREAKERS.
CONFIG 1

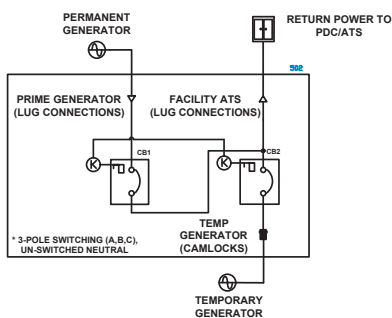


DUAL BREAKER DOCKING STATION -
TEMPORARY GENERATOR CONNECTION WITH
KIRK KEY INTERLOCKED CIRCUIT BREAKERS.
CONFIG 2

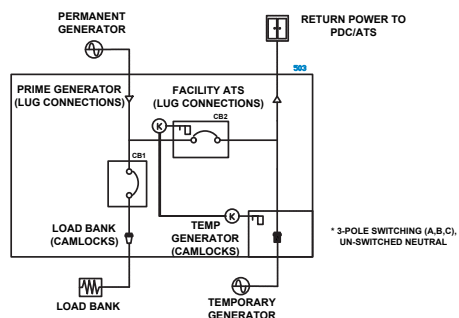

DUAL BREAKER DOCKING STATION -
TEMPORARY GENERATOR CONNECTION AND LOAD BANK
TESTING, PERMANENT GENERATOR BREAKER (CB2) KIRK KEY
INTERLOCKED WITH PORTABLE GENERATOR CAMLOCK COVER

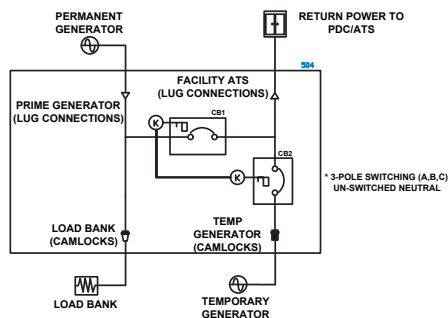

DUAL BREAKER DOCKING STATION -
TEMPORARY GENERATOR CONNECTION AND LOAD BANK TESTING.
WITH KIRK KEY INTERLOCKED BREAKER.

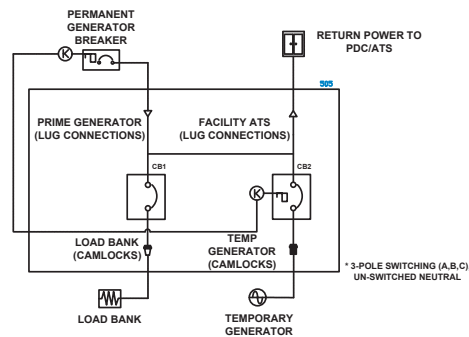

DUAL BREAKER DOCKING STATION -
TEMPORARY GENERATOR CONNECTION AND LOAD BANK TESTING.
TEMPORARY GENERATOR BREAKER (CB2) KIRK KEY INTERLOCKED
UPSTREAM CLIENT PERMANENT GENERATOR BREAKER.


Rev 3.3

Connection Cabinets

FFCC-P2 (Dual) Series



Product Selector

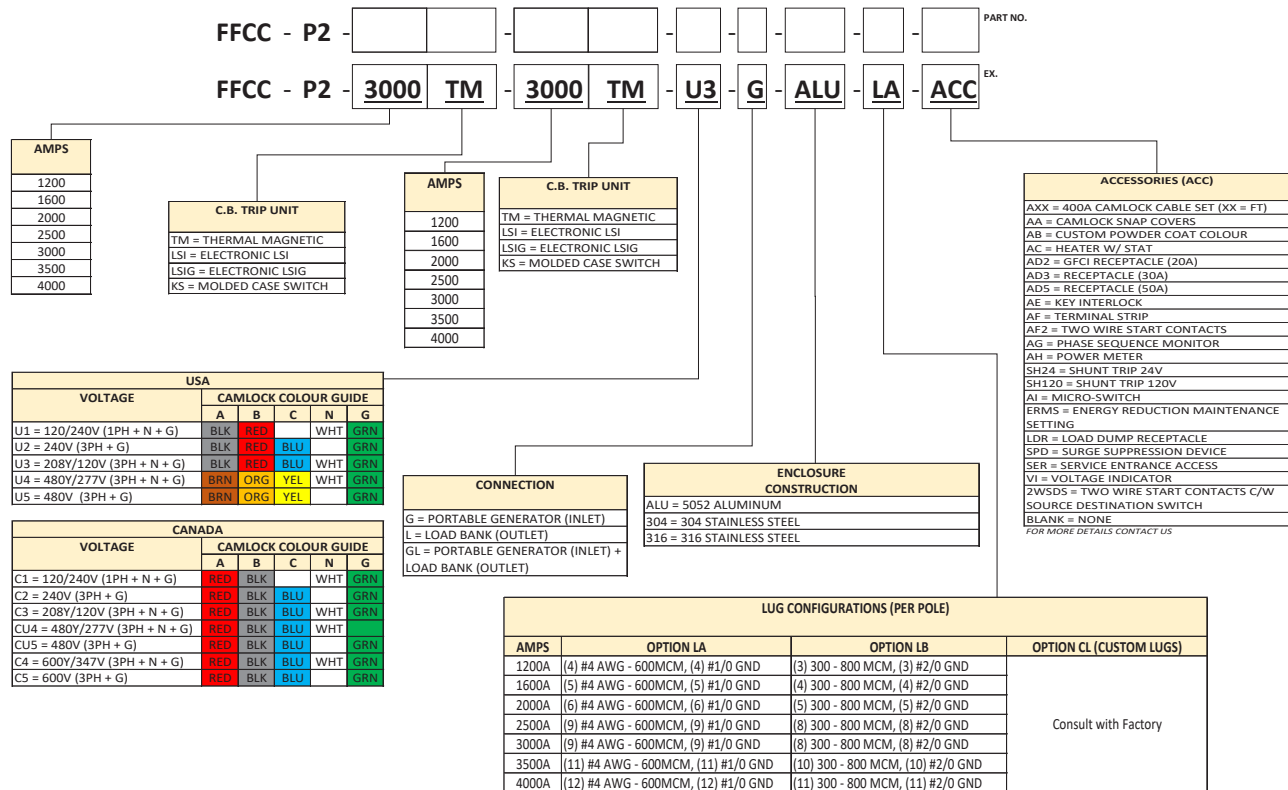

Max Ratings

- 4000A
- 600VAC

Dimensions & Est. Weights

GENERATOR / LOAD BANK

• 78"H x 45"W x 38"D (1200A)	710LB
• 78"H x 60"W x 38"D (1600A)	1270LB
• 90"H x 75"W x 30"D (2000A)	1520LB
• 90"H x 100"W x 36"D (3000A - 4000A)	2332LB

Bottom Entry

- Consult factory for sizing

GENERATOR & LOAD BANK - DUAL PURPOSE

• 78"H x 45"W x 38"D (1200A)	850LB
• 90"H x 75"W x 30"D (2000A)	1520LB
• 90"H x 100"W x 36"D (3000A)	2332LB
• 90"H x 140"W x 36"D (4000A)	4000LB

Rev 3.3

Foxfab Power Solutions

#102, 18725 - 25th Ave, Surrey, BC Canada, V3Z 2A1 Toll Free: (877) 468-0305 Email: Quotes@foxfab.com