



LED Panel Frame Light

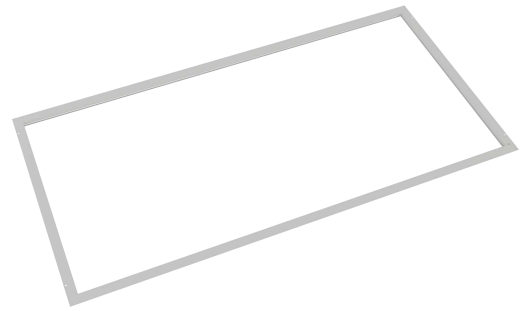

Available in 1x4, 2x2 and 2x4 configurations, upscale aesthetic with functionality and performance to match. The Frame features selectable lumen output and switchable color temperature to allow you to fine tune the look and feel of your space. Featuring the latest optical technology, the Frame is designed to provide the same lighting specifications as a traditional LED flat Panel.

the Frame light is mainly used in commercial lighting places, such as office, supermarket and so on.

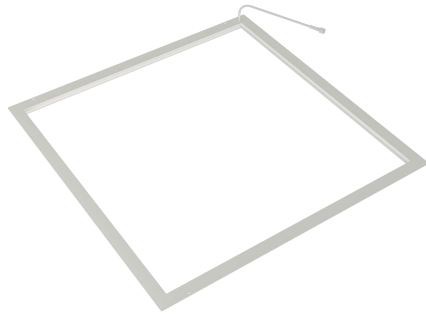

Catalog Number	Description	Lumens	Watts	CCT	Voltage
SZ-PFL14-40W-ACP	LED Panel Frame- 1' x 4'	4800 Lm	Adjustable 40 W Max	Adjustable 3500K - 6500K	120V - 277V
SZ-PFL22-40W-ACP	LED Panel Frame- 2' x 2'	4800 Lm	Adjustable 40 W Max	Adjustable 3500K - 6500K	120V - 277V
SZ-PFL24-55W-ACP	LED Panel Frame- 2' x 4'	6600 Lm	Adjustable 55 W Max	Adjustable 3500K - 6500K	120V - 277V

ORDERING GUIDE

Example: SZ-PFL22-40W-ACP

Company Code	Fixture Type	Size	Wattage	ACP
SZ Company Name	PFL Panel Frame	14 1' x 4' 22 2' x 2' 24 2' x 4'	40W 55W	ACP Adjustable CCT and Power 40W: 20/25/30/35/40W 3500/4000/5000/5700/6500K 55W: 20/30/40/50/55W 3500/4000/5000/5700/6500K

LED Panel Frame Light

Specifications

CCT and CRI

Adjustable: 3500K/4000K/5000K/5700K/6500K, CRI 80.

Operating Temperature

Suitable for use in -20° C to 45° C (-4° F to 113° F).

ELECTRICAL

Luminaire is built with the highest quality 120-277VAC drivers. PF>0.9.

Efficacy

Up to 120 lumens per watt.

OPTICAL SYSTEM

No yellowing problem of Light Guided Plate for this Frame light

DIMMING

0-10V dimmable standard.

WARRANTY

5 Years Limited Warranty.

Certifications

ETL Listed, FCC, DLC 5.1.

Dimensions

