


LED Square Slim Panel



4",6",LED Square Slim Panel Light comes complete with an external driver in a junction box. The driver/junction box makes for a quick and mess-free installation and the clip-in, can-less housing is ideal for low-plenum applications

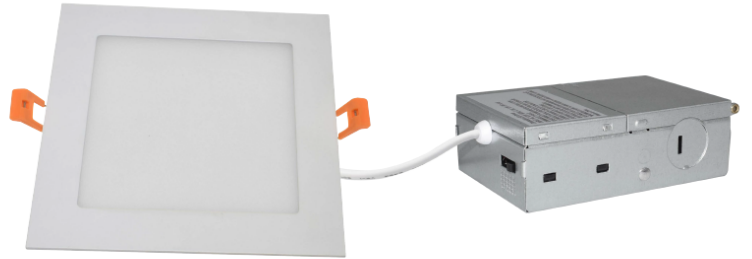

Catalog Number	Description	Lumens	Watts	CCT	Voltage
SZ-DL12W4-SP-S-CCT-277V	LED Square Slim Panel 4"	960 Lm	12W	Adjustable 2700K - 5000K Adjustable	100-277V
SZ-DL15W6-SP-S-CCT-277V	LED Square Slim Panel 6"	1200 Lm	15W	Adjustable 2700K - 5000K Adjustable	100-277V

ORDERING GUIDE

Example: SZ-DL15W6-SP-S-CCT-277V

Company Code	Fixture Type	Wattage	Size	SP	S	CCT	277V
SZ	DL	12W 15W	4 4" 6 6"	Slim Panel	S Square	CCT Adjustable CCT 2700K/3000K/3500K/4000K/5000K	100-277V

LED Square Slim Panel

Specifications

CONSTRUCTION

Aluminum housing with spring action clips.
Finish: Optional White, Black

ELECTRICAL

Drive: AC 100-277V 50/60Hz.

CCT & CRI

2700K, 3000K, 3500K, 4000K, 5000K Field

Selectable CCT

CRI 80

Beam Angle

120°

Operating Temperature

Suitable for use in -20° C to 45° C (-4° F to 113° F).

DIMMING

Triac (@120V) & 0-10V dimmable.

Certifications

ETL Listed.

WARRANTY

5 Years Limited Warranty.




Packing/Weight:

Model	Outer box (L*W*H)	Qty/CTN (pcs)	N.W./CTN (lbs/kg)	G.W./CTN (lbs/kg)	Remark
SZ-DL12W4-SP-S-CCT-277V	16.1*11.8*12.8" 410*300*305mm	24	19.6/8.9	22.7/9.7	
SZ-DL15W6-SP-S-CCT-277V	21.5*10.2*17.3" 545*260*440mm	24	27.9/12.7	30.1/13.7	


LED Square Slim Panel

DIMENSIONS (unit: inch)

4inch

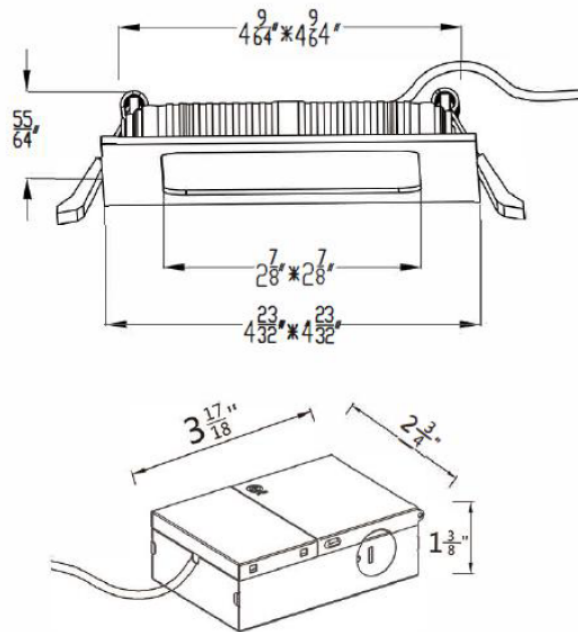

6inch

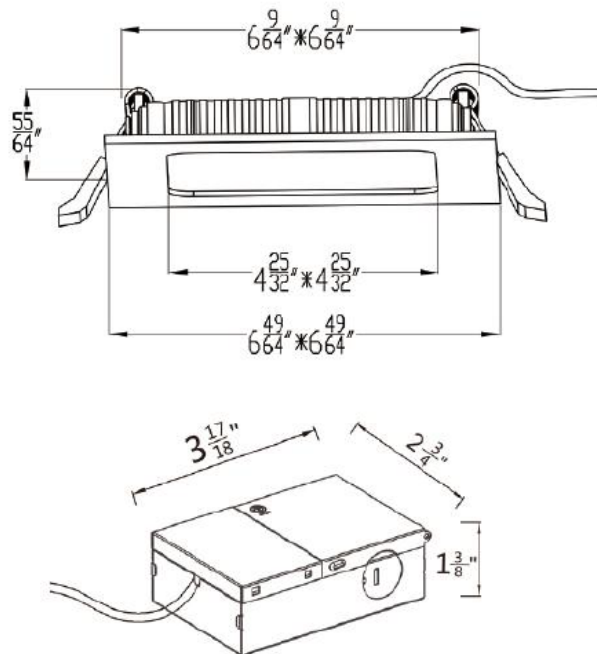

INSTALLATION:

