



---

**GAS**  
STOVES



Description

The Westport Steel Gas Stove is an affordable solution for a midsize to large living space. It offers the performance of the original Westport Cast Iron Gas Stove with a more modern design and steel outer construction. It's available in both Nova or IPI and can be vented top or rear, and is also compatible with a B vent.

Design Features

- Remote thermostat compatible
- Steel construction
- Ceramic log set
- Quick release glass door system
- Top vent / rear vent / B vent
- ClearView Safety Screen
- Optional 150 CFM fan
- Nova and IPI editions

Stove Specifications

|                        |                                  |               |               |
|------------------------|----------------------------------|---------------|---------------|
| BTU Maximum Input - NG | 30,000 BTU                       |               |               |
| Turn Down*             | up to 50%                        |               |               |
| Heating Area           | 1,700 ft <sup>2</sup>            |               |               |
| P4 Efficiency          | 64.9%                            |               |               |
| Viewing Area           | 13½" x 19¼", 260 in <sup>2</sup> |               |               |
| Glass Size             | 16½" x 20¾", 336 in <sup>2</sup> |               |               |
| Stove Dimensions       | HEIGHT<br>27½"                   | WIDTH<br>26¼" | DEPTH<br>19½" |

\* Turn down is based on Nova valve



Formed steel outer construction



High definition log set



Easy access controls





## Description

As our entry level gas stove, the S20 is the perfect solution for a smaller to mid-size living room. Its modern design blends well with a variety of décor, and its small footprint offers greater versatility in placement. It's available in IPI and can be vented top or rear.

## Design Features

- Field conversion kit NG to LP
- Thermostat or remote compatible
- Ceramic log set
- Charcoal fluted liner
- Top vent / rear vent convertible
- Heavy duty heat exchanger
- Easy access controls
- 150 CFM variable speed fan
- ClearView Safety Screen
- IPI Valve

## Stove Specifications


|                        |                                  |               |               |
|------------------------|----------------------------------|---------------|---------------|
| BTU Maximum Input - NG | 20,000 BTU                       |               |               |
| Turn Down*             | up to 33%                        |               |               |
| Heating Area           | 1,100 ft <sup>2</sup>            |               |               |
| P4 Efficiency          | 74.5%                            |               |               |
| Viewing Area           | 16½" x 18¾", 309 in <sup>2</sup> |               |               |
| Glass Size             | 19¾" x 17½", 346 in <sup>2</sup> |               |               |
| Stove Dimensions       | HEIGHT<br>33½"                   | WIDTH<br>24½" | DEPTH<br>18¾" |



High definition log set



Steel fireplace grate

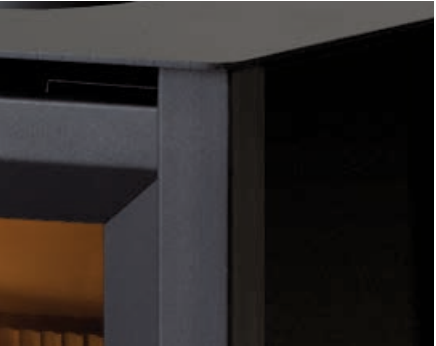

Modern steel construction





Cube Gas Stove with Table



Cube Gas Stove with Removable Safety Screen



Cube Gas Stove with Long Table



The Cube  
MEDIUM GAS STOVE

Cube Gas Stove with Long Table

## Description

The modern design of the Cube Gas Stove can be customized with either a standard table or a long table for a more creative install. Powder coated exterior panels are also available in three additional colors.

## Options

- Exterior Panels:
- Painted Metallic Black (Standard)
  - Powder Coated Sage Green
  - Powder Coated Bordeaux Red
  - Powder Coated Cypress Green

- Physical Options:
- Table
  - Long Table (Left & Right Compatible)

## Design Features

- Thermostat Compatible
- Top Vent / Rear Vent Convertible
- IPI Valve
- Durable Stainless Steel Burner
- Modern Design
- Ceramic Fluted Liner
- High Definition Log Set
- Full Ceramic Glass Panel
- Optional 150 cfm Fan Kit
- Removable Safety Screen

## Stove Specifications

|                        |                                                                                          |              |                                           |
|------------------------|------------------------------------------------------------------------------------------|--------------|-------------------------------------------|
| BTU Maximum Input - NG | 30,000 BTU                                                                               |              |                                           |
| Turn Down              | 33%                                                                                      |              |                                           |
| Heating Area           | 1,700 ft <sup>2</sup>                                                                    |              |                                           |
| P4 Efficiency          | 60%                                                                                      |              |                                           |
| Viewing Area           | 13 <sup>5</sup> / <sub>8</sub> " x 18 <sup>7</sup> / <sub>8</sub> ", 254 in <sup>2</sup> |              |                                           |
| Dims w/Table           | HEIGHT<br>35"                                                                            | WIDTH<br>24" | DEPTH<br>17 <sup>7</sup> / <sub>8</sub> " |
| Dims w/Long Table      | 35"                                                                                      | 44"          | 19 <sup>1</sup> / <sub>4</sub> "          |

## Optional Powder Coated Panel Kits



Sage Green



Bordeaux Red



Cypress Green





*S50 with Pole Pedestal - Painted Metallic Black, River Rock & Twig Set, Fluted Liner*



*S50 with Wood Pedestal - Painted Metallic Black, Traditional Log Set, Steel Painted Liner*



*S50 with Suspended Installation Kit - Painted Metallic Black, Traditional Log Set, Steel Painted Liner*



*S50 with Pole Pedestal - Carrara White, Birch Log Set, Black Glass Liner*

## Description

Introducing the Enviro S50, the most elegant addition to our freestanding lineup. This sleek and modern design sports 180° of curved glass to show off its ultra high definition log set. Capable of both rear and top venting. The S50 also has multiple color and pedestal options to choose from.

## Design Features

- Top vent / rear vent convertible
- Optional field conversion kit NG to LP
- Optional 70 CFM Circulation Fan available
- Optional Powder Coated Doors
- Optional Suspended Installation Kit

## Options

- Color Options:**
- Painted Metallic Black
  - Powder Coated Carrara White
- Media Options:**
- Traditional or Birch Log Set
  - River Rock & Twig Set
  - Glass Media
- Liner Options:**
- Steel Painted Liner (Included)
  - Black Glass Liner
  - Fluted Liner
- Physical Options:**
- Pole Pedestal
  - Wood Pedestal
  - Suspended Installation Kit

## Stove Specifications

|                            |                                 |              |              |
|----------------------------|---------------------------------|--------------|--------------|
| BTU Maximum Input - NG     | 30,000 BTU                      |              |              |
| Turn Down                  | 33%                             |              |              |
| Heating Area               | 1,500 ft <sup>2</sup>           |              |              |
| P4 Efficiency              | 68%                             |              |              |
| Viewing Area H/W (Flat-on) | 15" x 18", 270 in <sup>2</sup>  |              |              |
| Glass Size H/W             | 19½" x 29", 567 in <sup>2</sup> |              |              |
| Stove Dimensions           | HEIGHT<br>46"†                  | WIDTH<br>20" | DEPTH<br>20" |

† Height includes a pedestal.



Carrara White Door  
Birch Log Set  
Fluted Liner

Radiant Red Door  
Glass Media  
Black Glass Liner

Sage Green Door  
Traditional Log Set  
Steel Painted Liner

Add a touch of  
**COLOR**

Optional powder coated doors are available in these three colors to help you create an S50 gas stove that's uniquely yours.





Westley - Antique Bronze



Westley - Painted Black

### Description

The Westley's European cast iron outer construction creates a traditional aesthetic with modern accents. What really sets the Westley apart is its 180° viewing angle giving plenty of exposure to the high definition log set and stainless steel burner. The Westley is available in both a matte black finish or an antique bronze.

### Design Features

- European made castings
- 180° viewing angle
- Heavy duty heat exchanger
- B-vent compatible (IPI)
- 130 CFM variable speed fan
- ClearView Safety Screen
- Ultra HD log set
- True to life flame presentation
- Multiple Finishes:
  - Painted Black
  - Antique Bronze

### Stove Specifications

|                        |                       |               |                   |
|------------------------|-----------------------|---------------|-------------------|
| BTU Maximum Input - NG | 29,000 BTU            |               |                   |
| Turn Down              | 33%                   |               |                   |
| Heating Area           | 1,500 ft <sup>2</sup> |               |                   |
| P4 Efficiency          | 67%                   |               |                   |
| Combined Viewing Area  | 418 in <sup>2</sup>   |               |                   |
| Glass Size             | 525 in <sup>2</sup>   |               |                   |
| Stove Dimensions       | HEIGHT<br>27½"        | WIDTH<br>26¾" | DEPTH<br>19 9/16" |



8 Piece ultra high definition log set



European castings - Painted Black



Flame visible from three sides





### Description

The Westport Cast Iron is one of our most popular freestanding gas stoves. Its traditional design and cast iron outer construction provide a classy appearance. The Westport Cast Iron Gas Stove is available in a painted black matte finish or an antique chestnut porcelain enameled finish. It can be vented top, rear, and is also compatible with a B vent.

### Design Features

- Remote thermostat compatible
- Cast iron outer construction
- Ceramic log set
- Quick release glass door system
- Top vent / rear vent / B vent
- Safety screen
- Optional 150 CFM fan
- Nova and IPI editions
- Multiple Finishes:
  - Painted Black
  - Enameled Antique Chestnut

### Stove Specifications

|                        |                                  |               |               |
|------------------------|----------------------------------|---------------|---------------|
| BTU Maximum Input - NG | 30,000 BTU                       |               |               |
| Turn Down*             | up to 50%                        |               |               |
| Heating Area           | 1,700 ft <sup>2</sup>            |               |               |
| P4 Efficiency          | 64.9%                            |               |               |
| Viewing Area           | 13½" x 19¼", 260 in <sup>2</sup> |               |               |
| Glass Size             | 16½" x 20¾", 336 in <sup>2</sup> |               |               |
| Stove Dimensions       | HEIGHT<br>27½"                   | WIDTH<br>25¾" | DEPTH<br>19½" |

\* Turn down is based on Nova valve



Cast iron doors



High definition log set



Enameled antique chestnut finish





Description

The S40 Freestanding Gas Stove offers a maximum BTU output of 40,000 making it excellent at heating large living spaces. It has a modern design and a 5/16" steep plate top. Instead of a typical burner tube layout, the S40 uses a ceramic log burner that blends in with the rest of the log set to create a more realistic appearance.

Design Features

- Heavy duty heat exchanger
- Thermostat or remote compatible
- Ceramic log set and burner
- 5/16" steel plate top
- Ceramic charcoal fluted liner
- 150 CFM variable speed fan
- Optional B vent adaptor
- ClearView Safety Screen
- IPI

Stove Specifications

|                        |                     |               |               |
|------------------------|---------------------|---------------|---------------|
| BTU Maximum Input - NG | 40,000 BTU          |               |               |
| Turn Down              | up to 33%           |               |               |
| Heating Area           | 2,000 ft²           |               |               |
| P4 Efficiency          | 65.9%               |               |               |
| Viewing Area           | 15" x 19¾", 296 in² |               |               |
| Glass Size             | 16⅞" x 21", 355 in² |               |               |
| Stove Dimensions       | HEIGHT<br>28⅞"      | WIDTH<br>26⅞" | DEPTH<br>22⅞" |



Modern design



Ceramic burner



Heavy duty heat exchanger





Berkeley - Enameled Antique Chestnut



Berkeley - Painted Black

### Description

The Berkeley's European cast iron outer construction creates a traditional esthetic with modern accents. What really sets the Berkeley apart is its 180° viewing angle, providing plenty of exposure to the high definition log set and ceramic burner. The Berkeley is available in both a matte black finish and enameled antique chestnut.

### Design Features

- European-made castings
- 180° viewing angle
- IPI edition
- Heavy duty heat exchanger
- Ceramic log set and burner
- 150 CFM variable speed fan
- ClearView Safety Screen
- Two Stage Burner
- Multiple Finishes:
  - Painted Black
  - Enameled Antique Chestnut

### Stove Specifications

|                        |                       |               |               |
|------------------------|-----------------------|---------------|---------------|
| BTU Maximum Input - NG | 40,000 BTU            |               |               |
| Turn Down*             | up to 67.5%           |               |               |
| Heating Area           | 2,000 ft <sup>2</sup> |               |               |
| P4 Efficiency          | 66.6%                 |               |               |
| Combined Viewing Area  | 593½ in <sup>2</sup>  |               |               |
| Glass Size             | 724 in <sup>2</sup>   |               |               |
| Stove Dimensions       | HEIGHT<br>30¼"        | WIDTH<br>29⅝" | DEPTH<br>22⅞" |

\* Turn down is based on IPI valve with front burner being turned off.  
(SIT Proflame 2 models only)



Flame visible from three sides



9 Piece ultra high definition log set



European castings - enameled antique chestnut



Gas Stove Specifications

| Performance                    | S20<br>SMALL GAS STOVE | Westley<br>CAST IRON GAS STOVE      | Cube<br>GAS STOVE                                     | S50<br>GAS STOVE                                                                   | Westport<br>CAST IRON / STEEL STOVE               | S40<br>LARGE GAS STOVE | Berkeley<br>CAST IRON GAS STOVE                   |
|--------------------------------|------------------------|-------------------------------------|-------------------------------------------------------|------------------------------------------------------------------------------------|---------------------------------------------------|------------------------|---------------------------------------------------|
| BTU Max Input - NG             | 20,000 BTU             | 29,000 BTU                          | 30,000 BTU                                            | 30,000 BTU                                                                         | 30,000 BTU                                        | 40,000 BTU             | 40,000 BTU                                        |
| Turn Down<br>Nova / IPI        | 33%                    | 33%                                 | 33%                                                   | 33%                                                                                | 50% / 33%                                         | 33%                    | 67.5%*                                            |
| Construction                   | Steel                  | Cast Iron                           | Steel                                                 | Steel                                                                              | Cast Iron / Steel                                 | Steel                  | Cast Iron                                         |
| Nova                           | N/A                    | N/A                                 | N/A                                                   | N/A                                                                                | Available                                         | N/A                    | N/A                                               |
| IPI                            | Standard               | Standard                            | Standard                                              | Standard                                                                           | Available                                         | Standard               | Standard                                          |
| Efficiency -<br>Steady State** | 76.2%                  | 68.9%                               | -                                                     | -                                                                                  | 71.3%                                             | 70.7%                  | 69%                                               |
| Efficiency<br>FE rating †      | 74.5%                  | 67%                                 | 60%                                                   | 68%                                                                                | 64.9%                                             | 65.9%                  | 66.6%                                             |
| Viewing Area (H/W)             | 18⅞" x 16½"            | 418 in <sup>2</sup> (Front+Sides)   | 13⅝" x 18⅞"                                           | 15" x 18½"<br>(flat-on)                                                            | 13½" x 19¼"                                       | 15" x 19¾"             | 593 in <sup>2</sup> (Front+Sides)                 |
| Actual Glass (H/W)             | 19¾" x 17½"            | 525 in <sup>2</sup> (Front+Sides)   | 22¼" x 20¼"                                           | 19½" x 29"                                                                         | 16½" x 20⅜"                                       | 16⅞" x 21"             | 724 in <sup>2</sup> (Front+Sides)                 |
| Finish                         | – Painted Black        | – Painted Black<br>– Antique Bronze | – Painted Black<br>– Red or Green<br>Outer Panel Kits | – Painted Black<br>– PC Carrara White<br>– White, Red or Green<br>Door Accent Kits | – Painted Black<br>– Enameled Antique<br>Chestnut | – Painted Black        | – Painted Black<br>– Enameled Antique<br>Chestnut |

| Installation            | S20<br>SMALL GAS STOVE        | Westley<br>CAST IRON GAS STOVE | Cube<br>GAS STOVE<br>(W/TABLE)    | S50<br>GAS STOVE<br>(W/PEDESTAL) | Westport<br>CAST IRON /<br>STEEL STOVE | S40<br>LARGE GAS STOVE        | Berkeley<br>CAST IRON GAS STOVE |
|-------------------------|-------------------------------|--------------------------------|-----------------------------------|----------------------------------|----------------------------------------|-------------------------------|---------------------------------|
| Dimensions              | H    W    D<br>33½" 24½" 18⅜" | H    W    D<br>27½" 26¾" 19⅞"  | H    W    D<br>35"    24"    17⅞" | H    W    D<br>46"    20"    20" | H    W    D<br>27½" 25¾" 19½"          | H    W    D<br>28⅝" 26⅞" 22⅞" | H    W    D<br>30¼" 29⅝" 22⅝"   |
| LP Conversion Kit (SP)  | N/A                           | N/A                            | N/A                               | N/A                              | Included                               | N/A                           | N/A                             |
| LP Conversion Kit (IPI) | Optional                      | Optional                       | Optional                          | Optional                         | Optional                               | Optional                      | Optional                        |
| Venting (Direct Vent)   | 4" x 6⅝"                      | 4" x 6⅝"                       | 4" x 6⅝"                          | 4" x 6⅝"                         | 4" x 6⅝"                               | 4" x 6⅝"                      | 4" x 6⅝"                        |
| Venting Compatibility   | Top / Rear                    | Top                            | Top / Rear                        | Top / Rear                       | Top / Rear                             | Top                           | Top                             |
| B Vent Compatibility    | N/A                           | Yes                            | Yes                               | N/A                              | Yes                                    | Yes                           | N/A                             |
| Weight                  | 225 lbs                       | 190 lbs                        | -                                 | 150 lbs<br>(Without Pedestal)    | 227 lbs / 117 lbs                      | 275 lbs                       | 295 lbs                         |
| Convection Fan          | Included                      | Included                       | Optional                          | Optional                         | Optional                               | Included                      | Included                        |

\* Berkeley IPI turn down based on front burner being turned off.  
\*\* Steady state rating based on conventional venting configuration.  
† Based on the measured P.4-15 rating of the IPI model.  
Specifications and measurements are subject to change. Please refer to owners manual for the most up to date and detailed product information.

Gas Stove Specifications

| Clearance to<br>Combustibles                      | S20<br>SMALL GAS STOVE | Westley<br>CAST IRON GAS STOVE | Cube<br>GAS STOVE | S50<br>GAS STOVE | Westport<br>CAST IRON / STEEL<br>STOVE | S40<br>LARGE GAS STOVE | Berkeley<br>CAST IRON GAS STOVE |
|---------------------------------------------------|------------------------|--------------------------------|-------------------|------------------|----------------------------------------|------------------------|---------------------------------|
| Minimum distance to the stove's sides             | 8"                     | 10 ¼"                          | 11⅞"              | 12"              | 11"                                    | 11⅝"                   | 12"                             |
| Minimum distance behind the stove                 | 4"                     | 5"                             | 2½"               | 3"               | 2½"                                    | 5"                     | 5"                              |
| Minimum alcove height to top of stove             | 12"                    | 35"                            | 10"               | 16"              | 32½"                                   | 28⅝"                   | 27½"                            |
| Minimum distance corner to wall                   | 3"                     | 5"                             | 2½"               | N/A              | 2½"                                    | 7½"                    | 7½"                             |
| Center of vent to sidewall<br>(at minimum corner) | 15"                    | 15⅝"                           | 24"               | 22"              | 12⅞"                                   | 17¾"                   | 17¾"                            |



The best way to visualize  
your dream fireplace at home  
is with the Enviro App!

