powerlogic

# MK3 SERIES

Refined manual power access with integrated cable management.



## MANUAL PULL-UP

Fold-flat chrome handle to raise and lower by hand.

## USB CHARGING

High-power USB charging on selected variants.

## CONCEALED POWER

Retracts below the work surface when not in use.



USB Charging on the MK 3.1 AC



Lid with chrome handle



Socket below the surface


## Description

The MK3 Series is a manual pull-up power solution designed for modern workspaces. Featuring a fold-flat chrome handle, the unit raises and lowers smoothly by hand and sits flush with the surface when closed. Engineered from premium aluminium, it features shuttered power outlets, resettable thermal-overload protection and a water-resistant sealing system when fully closed. A swivelling cable input allows connected cables to remain neatly routed.

## Features

- Manually operated pull-up power unit
- USB-A and USB-C charging on MK3.1 AC
- Fold-flat chrome handle
- Swivelling cable input
- Water-resistant sealing system when fully closed
- Premium aluminium construction
- Shuttered power outlets
- Resettable thermal-overload protection
- Easy installation


## Power Configuration



MK 3.1 MK 3.1 AC

## Technical Specifications

| | |
|---|---|
| Voltage | 220–250 V AC, 50 Hz |
| Current | 15 A (3-pin outlet) |
| Power | 3000 W |

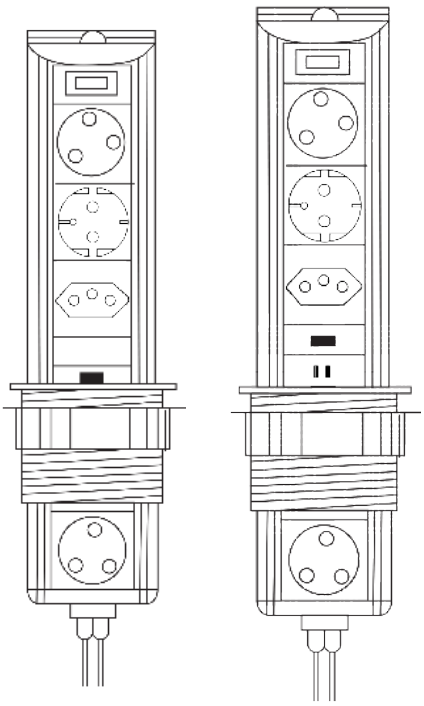

## Dimensions & Diameter

MK 3.1: 342 mm × 103 mm
MK 3.1 AC: 392 mm × 103 mm
Cut-out diameter: 95 mm
Weight: 1.5 kg

## Colour Options

© 2026 Copyright Powerlogic SA (Pty) Ltd. All Rights Reserved. Due to continual product improvements and upgrades, Power Logic reserves the right to amend and change products as it sees fit. As such, images of products are for indicative purposes only and actual products may vary from those depicted, and certain options may be unavailable. Always check with your distributor or with Power Logic regarding the availability of the product of your choice.





# Manual power, neatly managed.


The MK3 Series brings together refined manual operation, integrated cable management and flexible power in a clean, considered design for a workspaces.


powerlogic
SA (Pty) Ltd
innovative power technologies

# MK 3: Installation Guide

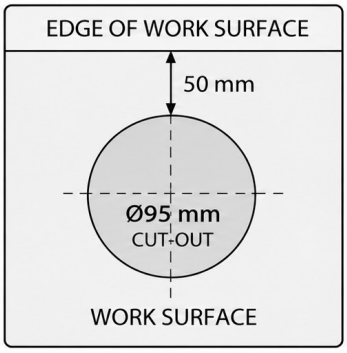

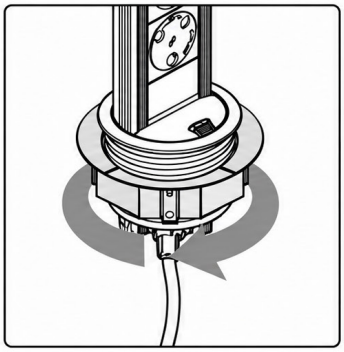

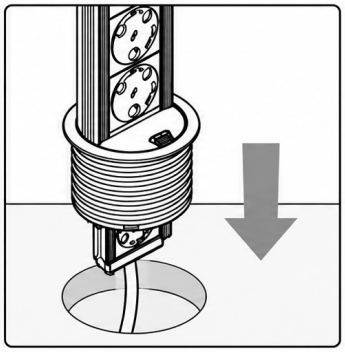
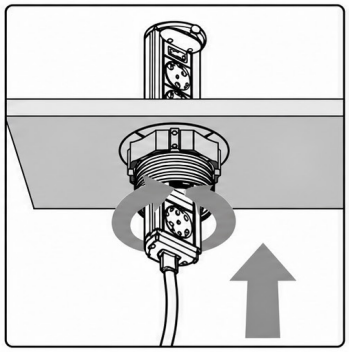
## Step 1
### Prepare Work Surface
Create a 95 mm diameter cut-out in the required installation position. Ensure there is sufficient clearance below the work surface and that the power cable can easily reach the power outlet.

## Step 2
### Remove Locking Collar
Remove the locking collar by turning it anti-clockwise (when viewed from above). Do not connect the unit to power until installation is complete.

## Step 3
### Position the Unit
Insert the unit into the pre-cut mounting hole, ensuring the cable is positioned correctly. Align the unit according to your desired orientation before securing.

## Step 4
### Secure the Unit
Attach the locking collar from underneath the work surface. Turn the collar clockwise until firmly tightened. Ensure the unit remains in the desired position while fastening.

---

**Watch the Installation Video.**
Scan the QR code or click the link below to view the installation guide.

https://www.youtube.com/watch?v=l3p9X--YPKA

---

## Installation Dimensions

**Mounting Hole:** Ø95 mm
**Surface Thickness:** 10 mm – 50 mm

## Before Installation

- Ensure the desk thickness is between 10 mm and 50 mm.
- Ensure the power cable can reach a nearby wall outlet.
- Ensure the installation area is clean and unobstructed.

## Maintenance and Care

- Ensure the unit is disconnected before cleaning.
- Clean the unit with a damp cloth and dry immediately.
- Do not use harsh chemical solvents.
- Do not allow liquids to enter AC sockets or USB ports.
- Regularly check and re-tighten the locking collar if required.
- Not designed for humid or dusty environments.

## Warning

- For indoor use only.
- If any malfunction occurs, do not attempt to repair.
- Return product to manufacturer for repair.
- Do not insert foreign objects into power outlets or USB ports.
- For work surface mounting only.
- For other options, contact your distributor.

## Warranty

All products carry a 24-month limited warranty, which excludes normal wear and tear and product abuse. The warranty will be void in the event of product tampering. Extended warranties are available on request.

Due to continual product improvements and upgrades, Powerlogic reserves the right to amend and change products without prior notice. Images are for illustrative purposes only and actual products may vary from those shown. Certain options may be unavailable. Please check with your distributor or with Powerlogic regarding product availability.